

PERFORMANCE PLUS®



The new degree of comfort®

PERFORMANCE PLUS® High Efficiency electric water heaters are engineered for longer life and feature an electronic LED system

Efficiency

- .93 UEF
- Isolated tank design reduces conductive heat loss
- Dual 5500 or dual 4500 watt copper heating elements

Performance

- FHR: 54 - 62 gallons, based on gallon capacity
- Recovery: 21 - 25 GPH at a 90° F rise**

Electronic LED System

- Simple and easy to read
- Indicates heating element and thermostat operation



Longer Life

- Premium grade anode rod provides long-lasting tank protection

Self Cleaning

- Fights sediment build-up
- Saves energy



Features

- High performance and lower operating cost
- Compliant with many electric utility incentive programs
- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations

Plus...

- Temperature and pressure relief valve included
- Low lead compliant

Warranty

- 9-Year limited warranty for tank and parts, 2-year full in-home labor warranty*

*See written warranty for complete details

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



PERFORMANCE PLUS High Efficiency 40 and 50-Gallon Capacities 240 Volt AC/Single Phase



LEED Point = 1

See specifications chart on back.



The new degree of comfort®

PERFORMANCE PLUS® High Efficiency Specifications

Fuel Type	Description	Nominal Gallon Capacity	Rated Gallon Capacity	Model Number	Recovery in G.P.H. 90° F Rise	First Hour Rating G.P.H.	Tank Height A	Height to Water Conn. B	Diameter C	Ship Weight (LBS.)	Uniform Energy Factor (UEF)
Electric	Tall	50	45	XE50T09EL55U1	25	62	58-7/8	61-5/8	20-1/4	121	0.93
Electric	Tall	50	45	XE50T09EL45U1	21	62	58-7/8	61-5/8	20-1/4	121	0.93
Electric	Medium	50	45	XE50M09EL55U1	25	62	48	50-1/2	23	132	0.93
Electric	Medium	50	45	XE50M09EL45U1	21	62	48	50-1/2	23	132	0.93
Electric	Medium	40	36	XE40M09EL55U1	25	54	48-1/4	50-1/2	20-1/4	106	0.93
Electric	Medium	40	36	XE40M09EL45U1	21	54	48-1/4	50-1/2	20-1/4	106	0.93
Electric	Tall	40	36	XE40T09EL45U1	21	55	60-3/4	63-5/8	19-1/4	109	0.93

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.


- Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 5500 watt upper and lower heating elements.

**Recovery = wattage/2.42 x temp. rise °F.
 Example: $\frac{5500W}{2.42 \times 90^\circ} = 25 \text{ GPH}$

**Recovery calculations used are based on 5500 watt elements used in non-simultaneous operation.



LEED Point = 1

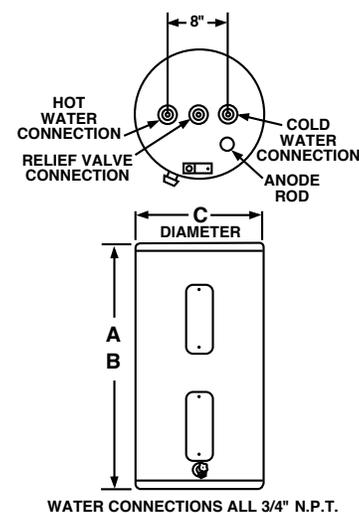

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100
 Roswell, Georgia 30076 • www.rheem.com