
INSTRUCTION MANUAL
12/16 INCH 3CCT LED Round Flat Panel Light

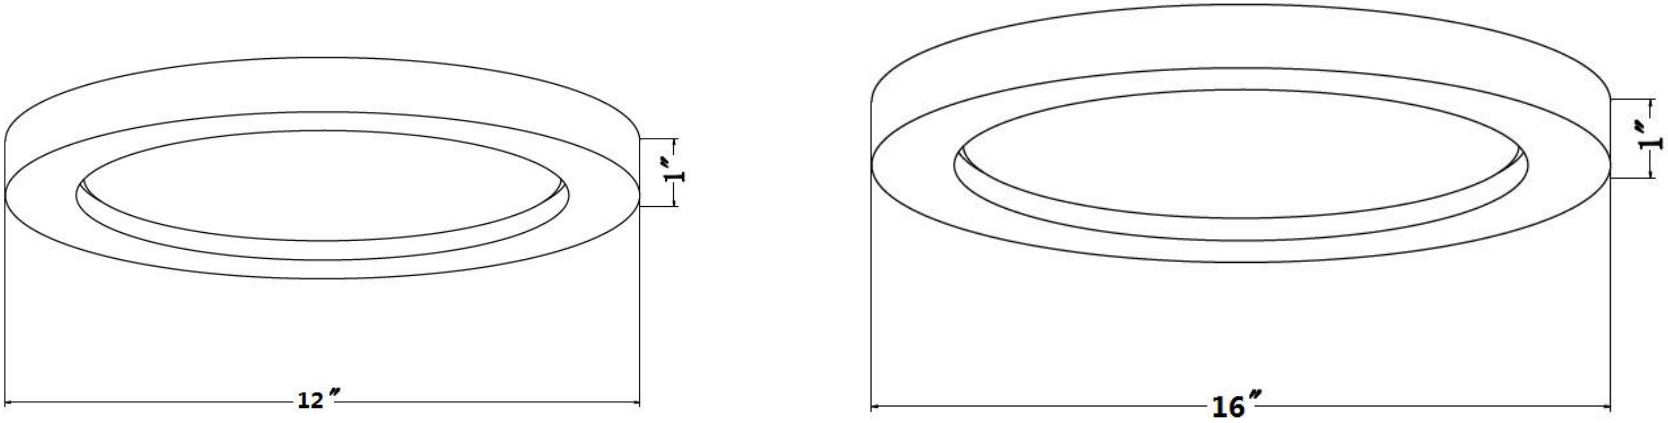

Product Parameters

Size	Watt	Color Temperature (CCT)	Lumens	CRI	Lifetime
12 inch	28W	3000K-4000K-5000K	3640lm	Ra>90	50,000 Hrs
16 inch	36W	3000K-4000K-5000K	4680lm	Ra>90	50,000 Hrs

Efficiency	130lm/W	**Input voltage**	AC 110-277V
LED Chips	SMD2835	**Material**	Aluminum+PC
Warranty	3 Years	**Protection Class**	IP44

Package Contents

Description	Quantity
Self-tapping screws	4
Drywall anchors	4
Wire nut	1

SAFETY INFORMATION


IMPORTANT: Read all safety precautions and installation instructions carefully before installing

◆Do not handle any energized fixture or attempt to energize any fixture with wet


◆Assure that the fixture is mounted onto a sound structurally surface that will support the fixture.

◆The fixture is designed for use in a 110-277VAC,60Hz fused circuit.

◆Product can be used in bedroom, kitchen, hallway, laundry room, stairwells, basement, closet room, dining room, porch, balcony and office.

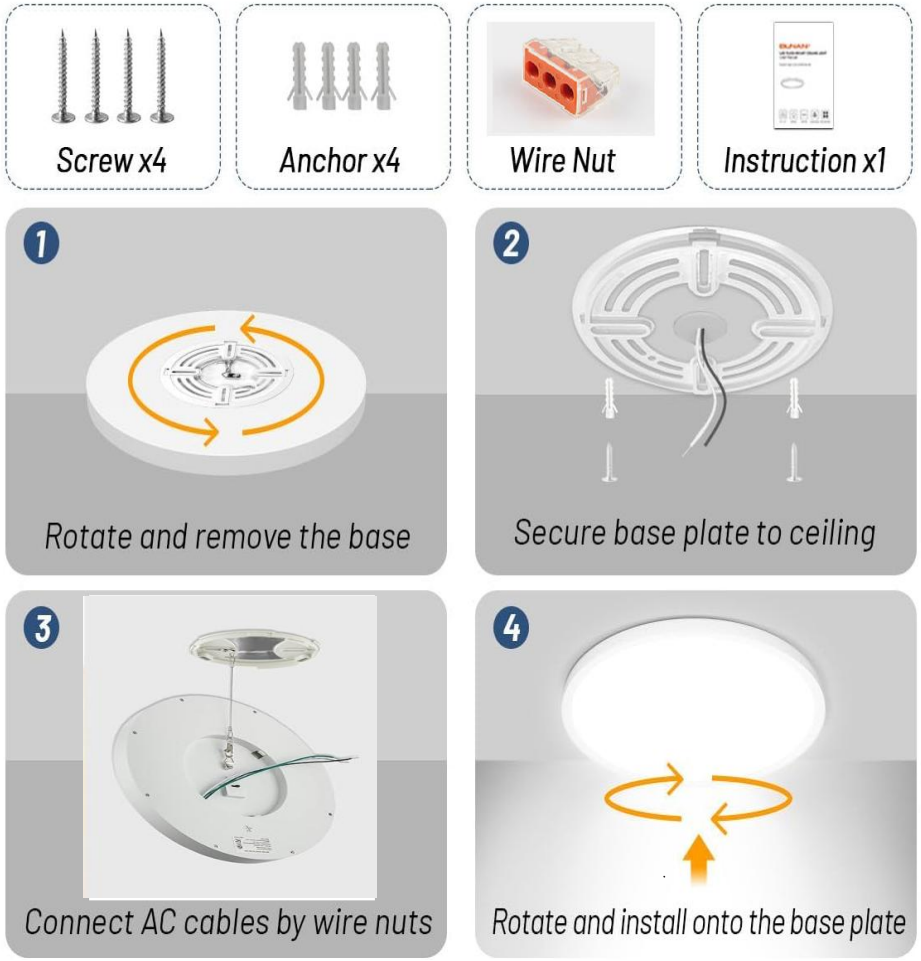

INSTALLATION

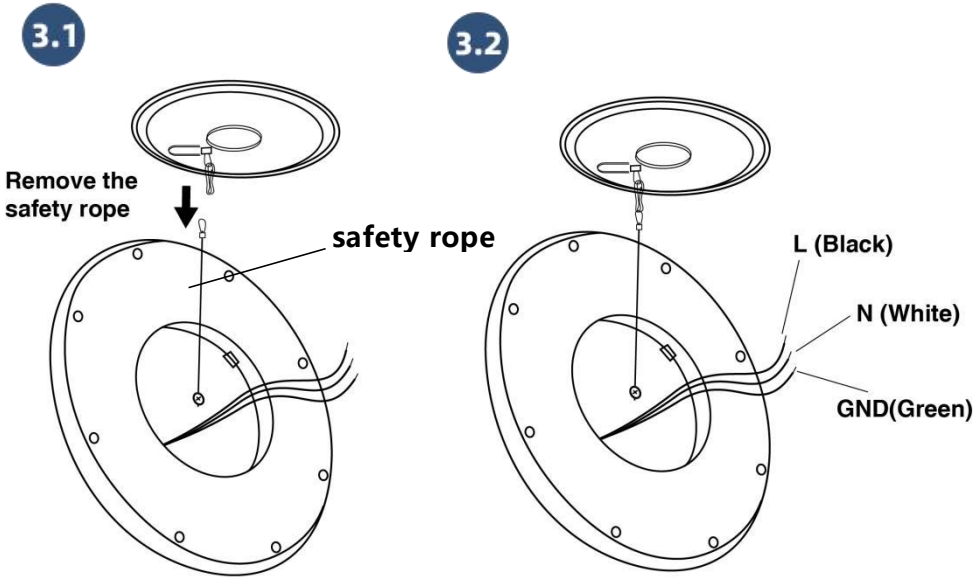

The safety rope added support and stability when you're wiring, make it easier to install the panel light securely and quickly.

How to Switch 3CCT Modes and Synchronization Function?

Switch 3000K/4000K/5000K:
Flip wall switch ON/OFF/ON within 2 seconds to change 3CCT.

Synchronization Function:
Toggle the wall switch 2 times within 1 seconds.

Manufacturer's Service

If you have any questions or concerns regarding safety or installation.

Please contact us freely admin@gbgreensun.cn