


Item:HT-G2D1D-8C-18W-927-1-51
 HT-G2D1D-10C-20W-927-1-51
 HT-G2D1D-12C-25W-927-1-51



USE AND CARE GUIDE

8 Inch/10 Inch/12 Inch Color Selectable and Dimmable Flush Mount LED Disk Downlight

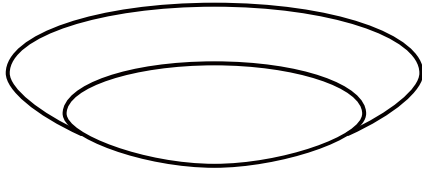

Before returning to your retailer, please contact support@runbisonlighting.com if you have any questions or problem with this product

1

SAFETY INSTRUCTION

Please read and understand all instructions before operate or install the product. Failure to do so may lead to electric shock , fired or other injuries that could be hazardous or even fatal.

- Shut off the electricity to the wires that you are working on.
- Do not open,no user serviceable parts inside . Any changes or modifications and applications not expressly approved by the manufacturer could void the user's authority to operate the equipment and warranty.

WARNING

- Risk of fire or electric shock.
- LED retrofit kit installation requires knowledge of luminaires electrical systems . Do not attempt installation if not qualified. Contact a qualified electrician
- Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and / or drawings.
- Do not exceed the input rating of the luminaire.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- This device is not intended for use with emergency exits
- This luminaire has not been modified to operate LED Lamp . Do not attempt to install or operate incandescent lamps or CFL in this luminaire.
- This retrofit kit is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction.

CAUTION


Connect fixture to a 120v / 60HZ power source . Any other connection voids the warranty .

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions

- 1) this device may not cause harmful interference
- 2) this device must accept any interference received ,including interference that may cause undesired operation.

3

PACKAGE CONTENT



| | PARTS | QTY |
|---|------------------|-----|
| A | Screws | 4 |
| B | Wire Nut | 3 |
| C | Mounting bracket | 1 |
| D | Disk lamp | 1 |


WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.


2

SURFACE MOUNTING INSTALLATION


Option 1: Mount 3.5" J-Box without bracket



- 1 . Make sure the power is off .Remove the fixture cover from the disklight .



- 2.Use the toggle switch to select your desired lamp color temperature-soft White (2700K) , Warm White (3000K) , Bright White (3500K) , Cool White(4000K) or Daylight (5000K)




- 3.Connect the wires from the fixture and the others from the J-box together with the wire nut.

4


SURFACE MOUNTING INSTALLATION

Fig.4




4. Use the provided screws to install the light to the junction box.

Fig.5



5. Push all the wires and cables into the J-box. Snap the disk light into the mounting bracket firmly.

Fig.6




6. Make sure the disk light is secured to complete the installation.

5

Option 2: Mount 4.5" J-Box with bracket




Fig.1




1. Remove the fixture cover from the disk light .

Fig.2



2. Use the toggle switch to select your desired lamp color temperature-soft White (2700K) , Warm White (3000K) , Bright White (3500K) , Cool White(4000K) or Daylight (5000K).

Fig.3




3 . Make sure the power is off . Use the provided screws to install the bracket to the junction box.

6


SURFACE MOUNTING INSTALLATION

Fig.4




4. Connect the wires from the fixture and the others from the J-box together with the wire nut.

Fig.5



5. Use the provided screws to install the light to the bracket.

Fig.6




6. Push all the wires and cables into the J-box. Snap the disk light into the mounting bracket firmly.

7

SURFACE MOUNTING INSTALLATION

Fig.7



7. Make sure the disk light is secured to complete the installation.

8