


# FeltBuster<sup>®</sup> High-Traction Synthetic Roofing Felt

Help protect your home and roof system from damaging moisture with roof deck protection



- Provides a critical layer of extra protection between your shingles and roof deck to resist wind-driven rain (or moisture from other sources) that can cause damage to your roof structure
- A durable, long-lasting upgrade over conventional asphalt felts that can tear or degrade over time
- Avoids water absorption that can lead to ugly wrinkling that “telegraphs” through the shingles

# FeltBuster® High-Traction Synthetic Roofing Felt

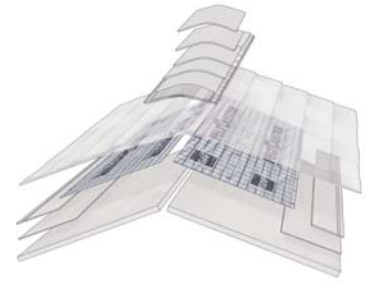

## Benefits:

- **Special spunbond surface provides excellent traction** for installers versus typical asphalt felts
- **Tough, synthetic construction** helps resist tearing underfoot and in high winds
- **Competitively priced** with typical asphalt felts (price varies by market)
- **Non-asphaltic polypropylene construction delivers long-lasting performance** and won't rot or degrade like conventional asphalt felts
- **Super-lightweight** 10 square roll is easy to handle on the roof
- **Medium-gray surface is cooler** to work with versus conventional black asphalt felts and the leading black low-cost synthetic underlayment
- **Eligible for up to a Lifetime limited warranty** when used on Lifetime Shingle roofs<sup>1</sup> and it's an eligible component of GAF residential enhanced warranties

## Product Details:

### Nominal Specifications:

For use with asphaltic shingles

- **Roll size:** 10 squares (1,000 sq. ft. [92.9 m<sup>2</sup>]) (excludes laps)
- **Roll width:** 48" (1.22 m)
- **Roll length:** 250' (76.2 m)
- **Approx. roll weight:** 23 lb. (10.4 kg)
- **UV exposure:** UV-stabilized polypropylene construction resists UV degradation for up to 90 days<sup>2</sup>

### Code Approvals:

- Meets or exceeds the physical requirements of ASTM D226 and D4869
- Miami-Dade County Product Control approved
- State of Florida approved
- CSA A123.3
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment



<sup>1</sup> See GAF Shingle & Accessory Limited Warranty for complete coverage and restrictions. The word "Lifetime" refers to the length of coverage provided by the GAF Shingle & Accessory Limited Warranty and means as long as the original individual owner(s) of a single-family detached residence [or the second owner(s) in certain circumstances] owns the property where the shingles and accessories are installed. For owners/structures not meeting the above criteria, Lifetime coverage is not applicable. Lifetime Limited Warranty on accessories requires the use of at least three qualifying GAF accessories and the use of Lifetime Shingles.

<sup>2</sup> 90-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is NOT related to withstanding water, snow, or wind. While FeltBuster® High-Traction Synthetic Roofing Felt is water resistant, it is NOT WATERPROOF. DO NOT USE FeltBuster® High-Traction Synthetic Roofing Felt as a temporary roof to protect property or possessions.

Note: Always install FeltBuster® High-Traction Synthetic Roofing Felt using plastic cap nails or plastic cap staples. Do NOT use nails or staples without caps.



To learn more about the Lifetime Roofing System visit [gaf.com/Lifetime](https://gaf.com/Lifetime)



We protect what matters most™

