

## Description

Thank you for purchasing the Westinghouse 20V Power Inverter. Please carefully read this manual to ensure safe and efficient usage of this product.

**Notice:** You need to determine the amount of power your device requires. This may require some research by yourself, or by examining the user guide for your device. The AC port on the 20V Power Inverter allows for 150W of continuous power, and 300W of startup surge power. This means if your device is pulling more than 150W for an extended period of time, the portable power supply will shut off. Do not overload.

**2**

Year Limited  
Warranty



LIFETIME TECHNICAL SUPPORT  
**1-855-944-3571**

[service@wpowereq.com](mailto:service@wpowereq.com)

[www.WestinghouseOutdoorPower.com](http://www.WestinghouseOutdoorPower.com)

## Safety

For safety, you should use the 20V Power Inverter in an environment that meets all the following conditions:


1. Do not expose to rain or water.
2. Operate only in ambient temperature between 32°F (0°C) and 113°F (45°C). Keep away from heat vents.
3. Well ventilated. Ensure at least 2inches (5cm) of air space around the fan.
4. For DC 18V only.

## Caution

- 1) Don't operate the 20V Power Inverter if hands are wet.
- 2) Keep away from children
- 3) Do not disassemble.
- 4) USB is for charging only.
- 5) Always use the proper charging cable for the device being charged.

## Operation

1. Insert the plastic plug-in box into a fully charged Westinghouse 20V battery.
2. Check that the green LED light on 20V Power Inverter is lit.
3. Plug in your device.
4. When the 20V Power Inverter green LED light is on, plug in your device.
5. When finished, unplug the 20V Power Inverter from the Westinghouse 20V battery. **The 20V Power Inverter will continue to pull power from the battery until it is unplugged.**

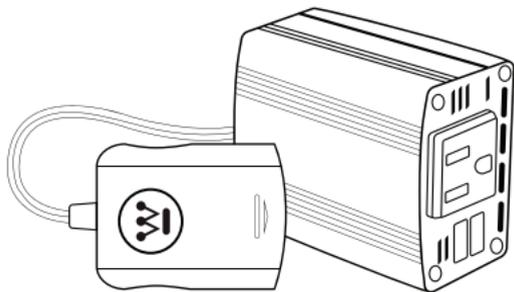

## Specifications

Input voltage	DC 18V (16-21V)
Output voltage	AC 110V
Frequency	60Hz
USB output	DC 5V/2.1A+1A
Running watts	150W
Peak watts	300W
THD	<3%
Under-voltage shutdown	15.4V
Over-voltage shutdown	23.4V
Operating temp.	32°F~113°F



WARNING

Batteries, battery posts, battery terminals, and related accessories can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).