



# IDEAL Twist-On F Connector Termination Instructions




1) Use coax stripper to strip cable so 1/4" of conductor and 1/4" of braiding are exposed. (45-605 shown)

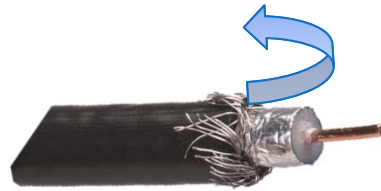

2) Fold back braiding, make sure no braids are touching the center conductor. Straighten conductor if needed. Do not remove foil that is attached to the white dielectric (RG6/6Q)

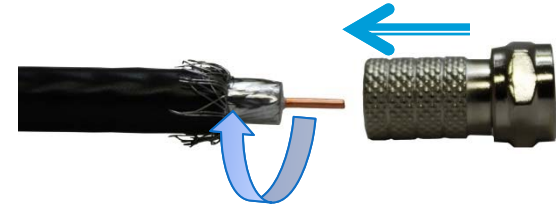

3) Center cable over back end of connector and push connector on to cable until resistance is felt. Then begin twisting connector body clockwise while pushing towards cable.

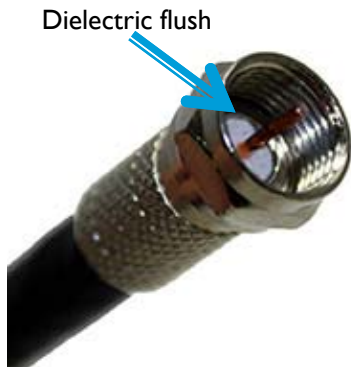

4) Twist until cable is fully seated. When white dielectric is flush with the bottom of the nut connector is fully seated.



5) Connect to device.

RG6 coax is used in this example. General preparation instructions are the same for RG59 IDEAL F Twist-On connectors.