




SPACING AND FASTENING DETAIL




Eave, Ridge & Valley · -180 psf · 8 in. O.C.





Eave, Ridge & Valley · -93 psf = 12 in. O.C.



Field Fastening · -67.25 psf = 16 in. O.C.



SIDELAP DETAIL

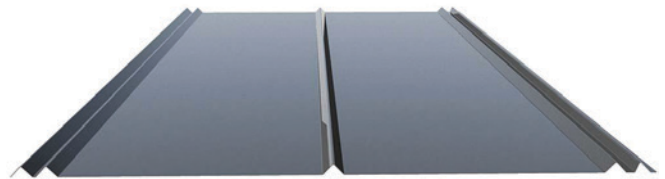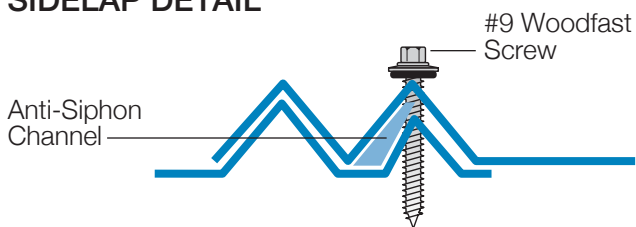

APPROVALS



26 Gauge



29 Gauge

Code Approvals¹

UL Fire Resistant Directory **#R20735**
 Miami Dade NOA #: **16-0510.23** (26 ga. min.)
 Florida Building **#FL-11175** (29 ga. min.)

1. Code Approval numbers may have changed since publication. For the most recent code approval numbers, contact Southeastern Metals' Technical Department or refer to the appropriate code agency.

Testing Data & Specifications

Accelerated testing 2000 hours - **ASTM G23**
 Salt Spray testing 1000 hours - **ASTM B117**
 Fire Testing - **ASTM E108** or **UL 790**
 Wind Driven Rain - **TAS 100**