


Item: 1100




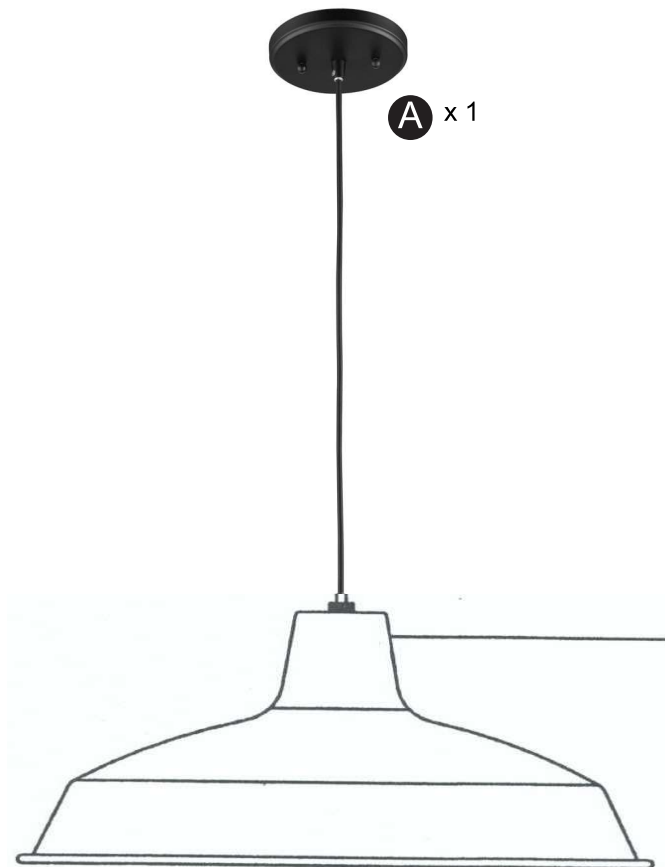


1 LT PENDANT

PACKAGE CONTENTS



HARDWARE CONTENTS

Note: Hardware not shown actual size.

- | | | |
|---|---|---|
| AA  | BB  | CC  |
| Mounting Unit
x 1 | Mounting Screw
x 2 | Support screw
x 2 |
| DD  | EE  | FF  |
| Wire Nuts
x 3 | Ball Nut
x 2 | 60-watt max. E26
incandescent bulb
x 1 |

⚠ SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.

CAUTION

- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.
- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
- Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regards to proper grounding methods as required by the local electrical code in your area.
- If a dimmer control switch is used with this fixture, obtain professional advice to determine the correct type and electrical rating required.


PREPARATION

Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.


Tools Required for Assembly (not included): Screwdriver, Phillips Screwdriver, Pliers, Electrical Tape, Wire Cutters, Safety Glasses, Ladder, Wire Stripper

ASSEMBLY INSTRUCTIONS


1. Screw the support screws (CC) into the mounting unit (AA).




2. Attach mounting unit (AA) to the junction box (not included) with mounting screws (BB). Note: the support screws on the mounting unit (AA) should protrude out away from the junction box.



3. Connect the copper wire on the light fixture to the mounting unit (AA) by securing it with the preinstalled ground screw.



4. Connect the black to black (power), the white to white (neutral) and copper wire to ground wire with the wire nuts (DD) and secure with electrical tape (not included). Helpful Hint: If wires out of the fixture are the same color, attach the side with markings or letters to black (positive) and the other to white (neutral).



5. Secure the light fixture to the junction box by placing the canopy (A) over the support screws (CC) on the mounting unit (AA) and securing it with the ball nuts (EE).

