



Revision #33
May 18, 2022

Grand Garden Chalet 6X3-BEVEL Assembly Manual

Thank you for purchasing a Grand Garden Chalet. Please take the time to identify all the parts prior to assembly.

Please use Safety Eyewear and Gloves while Assembling. Be sure to read and follow all operating instructions for any tools used during assembly. Remember- NO SAW CUTTING IS REQUIRED!

Safety Points and Other Considerations

Our products are built for use based on proper installation and normal residential use, on level ground.


Please follow the instruction manual when building your Grand Garden Chalet and retain the manual for future maintenance purposes.

Some of the safety and usage measures you may wish to consider include:

-If the product is elevated, any structural and building code requirements are solely the customer's responsibility, and should be abided by.

-In high or gusty wind conditions it is advisable to keep the structure securely grounded.

-Have a regular maintenance plan to ensure screws, doors, roof and parts are tight.

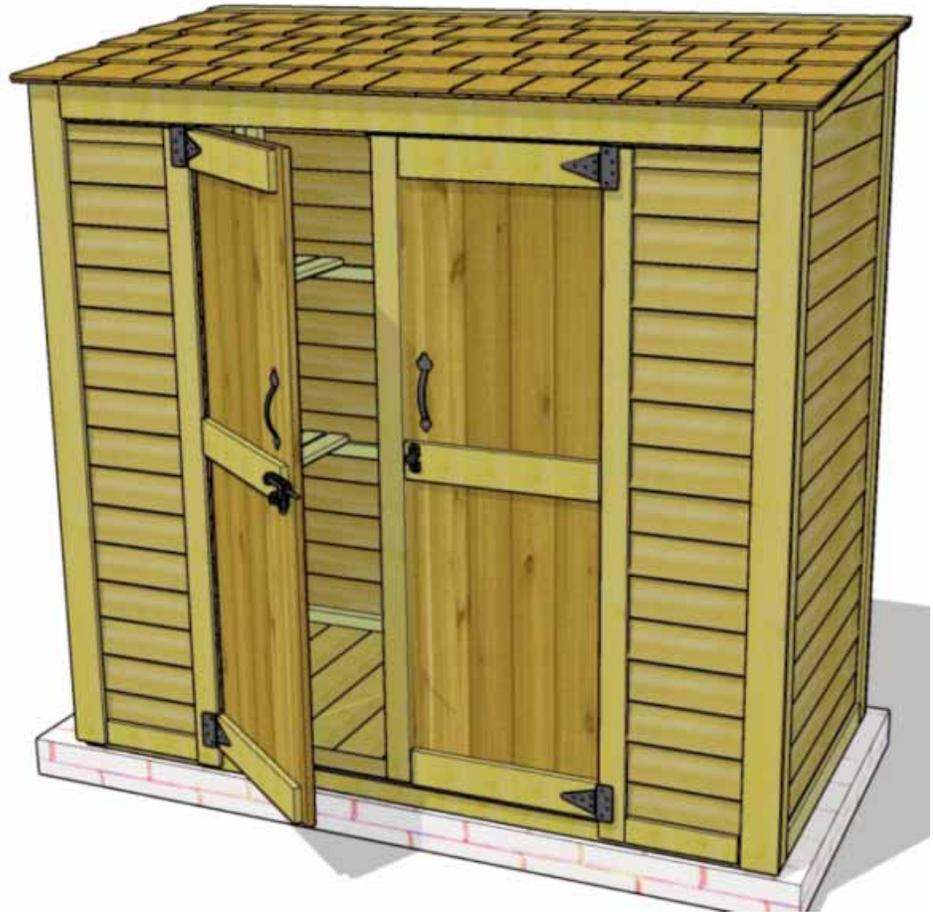

Grand Garden Chalet Dimensions:

Inside - 33" d x 73" w x 70" (back) 65" (front)

Outside with Roof Overhang - 39"d x 78" w x 73"(back) 69" (front)

Outside (Outside Trim to Trim) - 36 1/2"d x 74 1/2" w x 72"(back) 68" (front)

Assembly Video Instructions

To view the assembly video, click on the following link:
<http://www.youtube.com/watch?v=x4SMBAemtMQ>

In the event of a missing or broken piece, simply call the Outdoor Living Today Customer Support Line @ 1-888-658-1658 within 30 days of the delivery of your purchase. It is our commitment to you to courier replacement parts, free of charge, within 10 business days of this notification. Replacement parts will not be provided free of charge after the 30 day grace period.

What to do before my Shed arrives?



- Become familiar with this assembly manual and determine if you can complete the project yourself or will require a professional contractor.



- One helper is recommended to assist in constructing your chalet. It generally takes two people less than a day to assemble a chalet. If you're hiring a contractor, their rate should be in line with that duration of work.



- Clear the construction area and ensure a clear pathway for delivery when the freight company arrives. Remove all debris: roots, grass, rocks, etc.



- Excavate the site. Contact your local utilities company to ensure there are no gas or electric lines buried in the area before digging.




- Decide on the type of foundation you will be using:
 - Concrete slab, or
 - 4-6 inches of crushed gravel with paver stones or 4x4 stringers.

You can find the footprint for your shed on Page 3 of your Assembly Manual.




- If doing the assembly yourself, have all the necessary tools ready to go and in working condition. A list of required tools can be found after the parts list.


Foundation Types for 6x3 Garden Shed

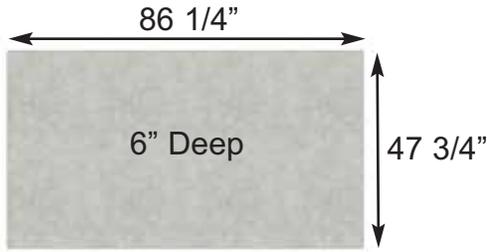

Concrete Foundation

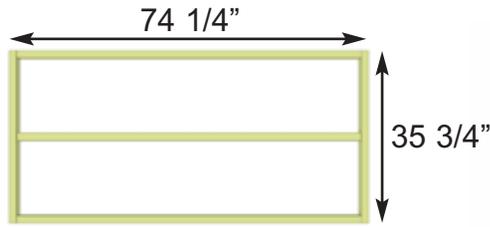

Floor Frame

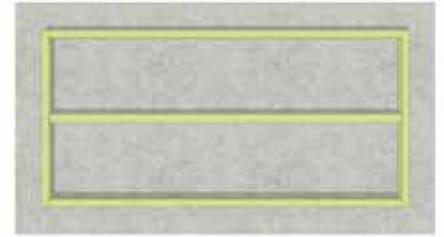


Completed Foundation


Concrete Slab Foundation:

- Slab must be at least the same size as assembled floor frame (35 3/4" x 74 1/4") or larger.
- 6" Deep foundation.
- 0.6 Cubic Yards of concrete required.
- A concrete slab will have the longest durability out of your foundation options.

Once level, a concrete slab is the easiest surface to build on.

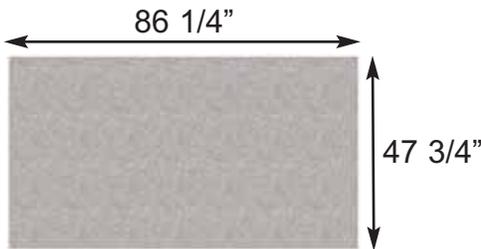


Gravel Foundation

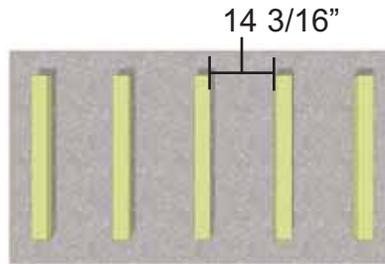

Gravel Foundation with treated stringers

5 - 4"x4"x34 3/4"

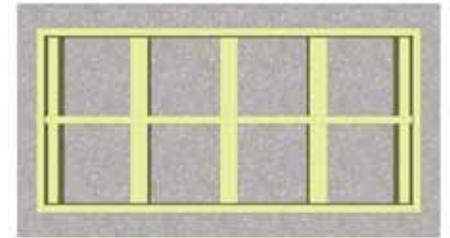


Completed Foundation

Gravel with 4x4 Pressure Treated Stringers:

- Excavate at least 6" deep, and 6" wider than floor frame on each side.
- 0.6 Cubic Yards of gravel required, approximately 6 wheelbarrows.
- 5 - 4x4 Pressure Treated Stringers 34 3/4" long required.
- Evenly spaced, with one at each end of floor frame.


Saves money on materials, easy to level and work with.

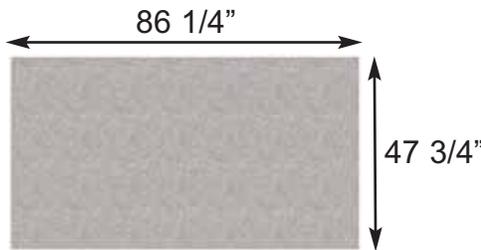

Gravel Foundation



Gravel Foundation with Patio Pavers

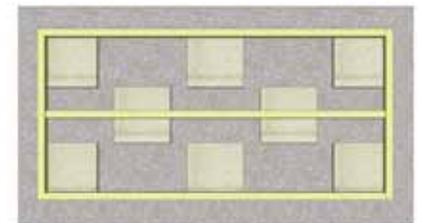


Completed Foundation

Gravel with Patio Paver Stones:

- Excavate at least 6" deep, and 6" wider than floor frame on each side.
- 0.6 Cubic Yards of gravel required, approximately 6 wheelbarrows.
- 8 patio pavers (8" x 8" or larger).
- Center patio paver stones underneath floor runners and underneath seams in floor joists.

Patio paver stones are widely available from most landscape stores.

Exploded View and Parts List for 6'x3' Grand Garden Chalet

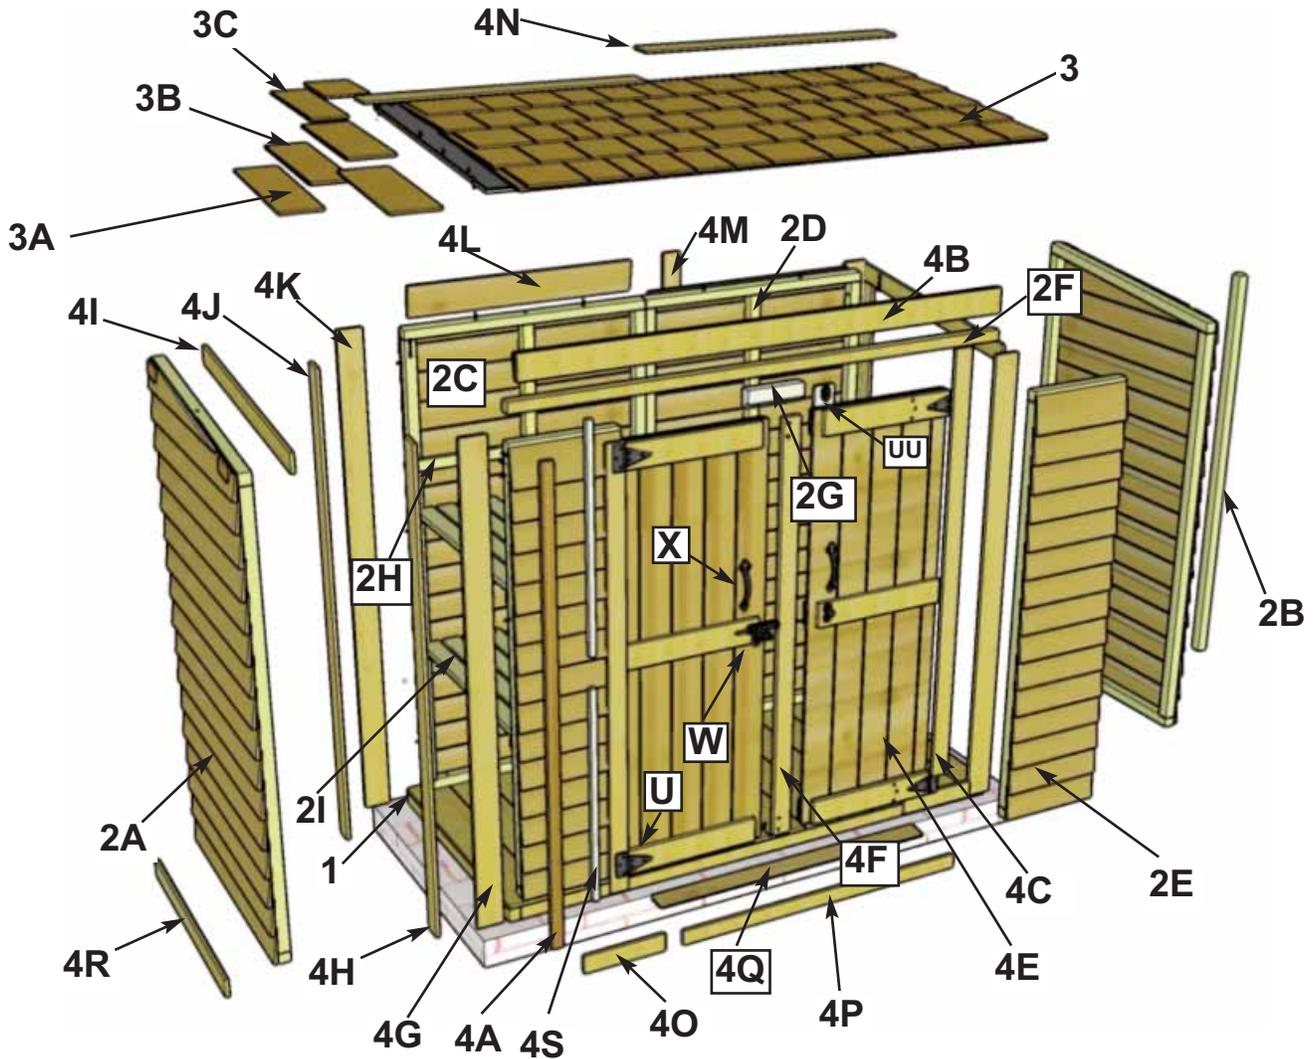

Parts List

1. - Floor Section

1 1 - Floor Section - 35 5/8" x 74 1/4" x 2 1/2"

2. - Wall Section

2A 2 - Side Walls - 35" x 70" - Angled Top (Left / Right Side)
 2B 2 - Side Wall Studs - 1 1/2" x 1 1/2" x 64 5/8" (angle cut end)
 2C 2 - Back Wall Panels - 35" x 70" - Identical
 2D 2 - Back Wall Studs - 1 1/2" x 1 1/2" x 67"
 2E 2 - Front Narrow Walls - 14 1/2" x 63 3/4" - Identical
 2F 1 - Door Header - 1 1/2" x 1 1/2" x 70"
 2G 1 - Upper Door Stop - 1 1/2" x 2 1/2" x 8" with Dado cut
 2H 2 sets - Storage Shelf Supports- 3/4" x 1 1/2" x 14 1/2" & 18 1/4"
 2I 2 - Storage Shelves - 3/4" x 11 1/2" x 31 1/4"

3. - Roof Section

3 1 - Cedar Shingle Roof Panel - 38" x 73 1/2"
 3A 7 - 5" x 14 - 16" Shingles (Includes 1 Extra Shingle)
 3B 5 - 6" x 14 - 16" Shingles (Includes 1 Extra Shingle)
 3C 2 - 6" x 12" Shingles

4. - Trim / Misc. Section


4A 2 - Front Filler Trims - 5/8" x 1 1/2" x 65"
 4B 1 - Front Horizontal Trim - 1 1/4" x 3 1/2" x 68 1/4"
 4C 2 - Vertical Door Frame Trim - 1/2" x 2 1/2" x 64 1/4"
 4D 2 - Door Trim Spacers-Bevel - 2 1/4" x 2 1/4" pcs.-In Hardware Bag
 4E 2 - Doors - 20 1/4" x 61 1/2"
 4F 1 - Door Flange - 1/2" x 2 1/2" x 61 3/8"
 4G 2 - Front Corner Trims - 1/2" x 3 1/2" x 67 3/4"
 4H 2 - Front Side Corner Trims - 1/2" x 2 1/2" x 68 1/4" - angle cut end
 4I 2 - Side Facia Trims - 1/2" x 2 1/2" x 33 7/8" - angle cut ends
 4J 2 - Rear Side Corner Trims - 1/2" x 2 1/2" x 70 1/4" - angle cut end
 4K 2 - Rear Corner Trims - 1/2" x 3 1/2" x 72"
 4L 2 - Upper Rear Trims- Bevel - 1" x 4 1/2" x 32 3/8"
 4M 1 - Rear Center Trim - 1/2" x 2 1/2" x 72"
 4N 2 - Roof Ridge Caps - 1/2" x 3 1/2" x 39"
 4O 2 - Lower Front Narrow Trims - 1/2" x 2 1/2" x 11 1/8"
 4P 1 - Doorway Narrow Trim - 1/2" x 2" x 40 7/8"
 4Q 1 - Door Threshold (Bevel) - 1/2" x 2 5/8" x 40 7/8"
 4R 2 - Lower Side Narrow Trims - 1/2" x 2 1/2" x 31"
 4S 4 - Vertical Interior Door Stops - 3/4" x 3/4" x 31 5/8"
 ** Plus 2 Cedar Shingle Shims (4T) discard after shimming doors

Note: We recommend you drill a 1/8" pilot hole for each screw to avoid splitting wood. The hole depth should be equal to 3/4 the length of screw.

Note: Trim and Skirting pieces are graded with the best face being rough sawn. Rough sawn cedar is much easier to paint and stain.

6x3 GRAND GARDEN CHALET

Hardware Kit (Provided)

| | | | | | |
|---|---|---|---|---|---|
| 3" |  | B - 15 pcs | 3/4" |  | J - 22 pcs |
| 2 1/2" |  | C - 80 pcs | Black Headed Screw | | |
| 2" |  | H - 14 pcs | 1 1/2" |  | K - 208 pcs |
| Black Headed Screw | | | Finishing | | |
| 1 1/4" |  | E - 16 pcs | 7/8" |  | M - 30 pcs |
| 1" |  | F - 7 pcs | Shingle | | |
| 3/4" |  | G - 5 pcs | 1 1/2" |  | FF - 4 pcs |
| Silver | | | Black Headed Bolt with Silver Nut and Washer | | |
|  |  |  |  |  |  |
| (U) Tee Hinge x 4 pcs. | (X) Door Handle x 2 pcs. | (W) Barrel Bolt | (BB) Silver Barrel Bolt | (4D) 2 1/4"x 2 1/4" Door Trim Spacer | (UU) 1/2"x 2 3/4" Plywood Spacer |

Tools Required (Not Provided)






| | | | | |
|---|---|--|--|--|
|  |  |  |  |  |
| Hammer | Screw Gun/Drill | Tape Measure | Wood Clamp | 3/8" Wrench |
|  |  |  |  | |
| Level | Pliers | Ladder | 1/8" & 3/8" Drill Bits | |

Safety Equipment Required (Not Provided)

| | |
|---|---|
|  |  |
| Safety Glasses | Work Gloves |

Before/During Assembly:

- 1.) Paint each face and edge of your plywood floor with a latex exterior paint.
- 2.) Caulk wall seams if gaps appear.
- 3.) Caulk around window framing.
- 4.) Caulk perimeter between floor plywood and bottom wall plate.
- 5.) Caulk channels in lap siding at the top of your door above the trim, just a drop in each channel.
- 6.) Caulk edge of door threshold.
- 7.) Optional: Install a Sill Gasket between floor runners and foundation.
- 8.) Optional: Install an 8" strip of roofing paper below Cedar Ridge Caps for Cedar Roof Sheds.

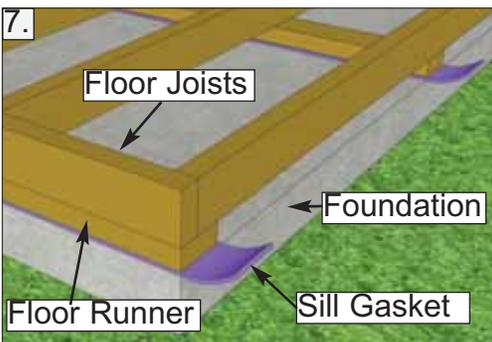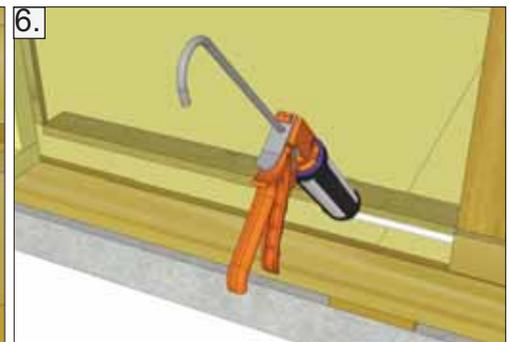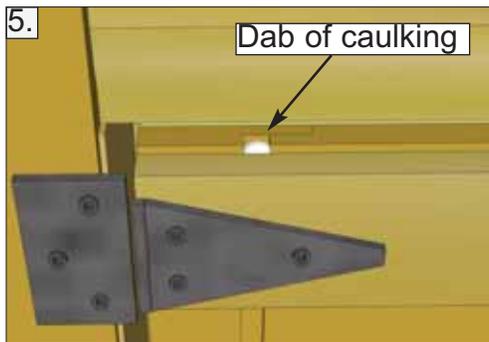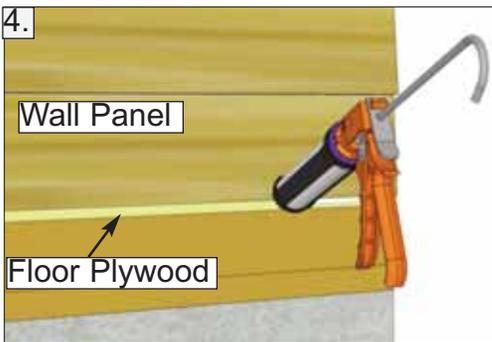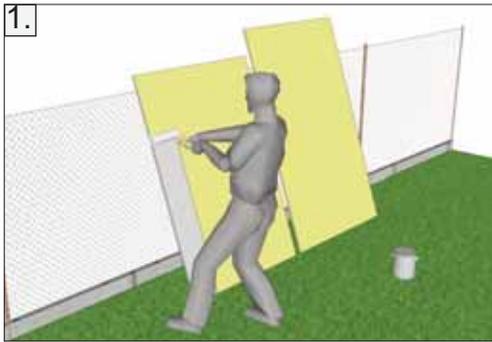


Routine Maintenance:

- Routinely check all fasteners are tight (ex. Door Hinges, Nails)
- Brush off dirt from walls.
- Brush off snow from roof regularly.
- Routinely remove needles and leaves from cedar roof.

Painting/Staining


- Your cedar shed, if left untreated, will weather to a silvery grey colour.
- Painting or staining your structure is highly recommended and will prolong the life of your shed.
- You do not need to wait to paint or stain your shed, the wood in your kit has been dried and can be stained or painted immediately.
- Consult your local paint store for the best paint or stain for cedar.
- Optional: stain the inside of your shed. (Note: this will remove the fresh cedar smell.)

1. Lay Chalet Floor Section (1) (35 5/8" x 74 1/4") on a level foundation only. Patio Stones or a Concrete Slab both make excellent foundations. Use a level to confirm and shim floor joists as required.

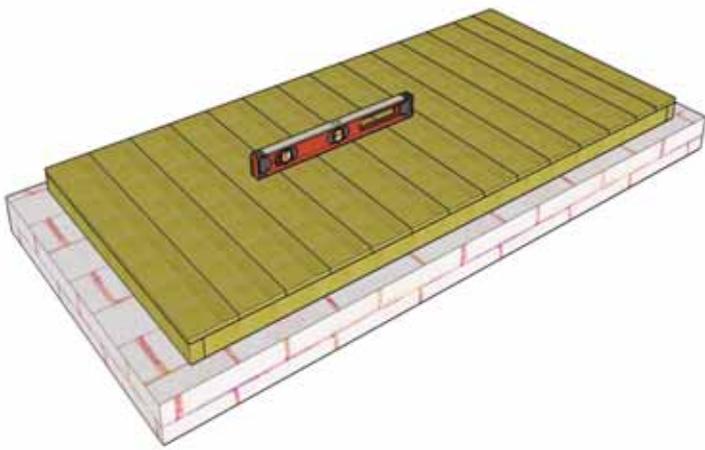


Due to packaging constraints, center wall studs must be attached prior to erecting walls.


2. Locate both Side Wall Panels (2A) (left and right side panels) and 2 Side Wall Studs (2B) (1 1/2" x 1 1/2" x 64 5/8"). Side Wall Studs are angle cut on 1 end. Lay on a flat level surface with frames up. Locate **Back Wall Panels (2C)** and **Back Wall Studs (2D) (1 1/2" x 1 1/2" x 67")**. The top framing of both back walls are angle cut. Lay on flat level surface.

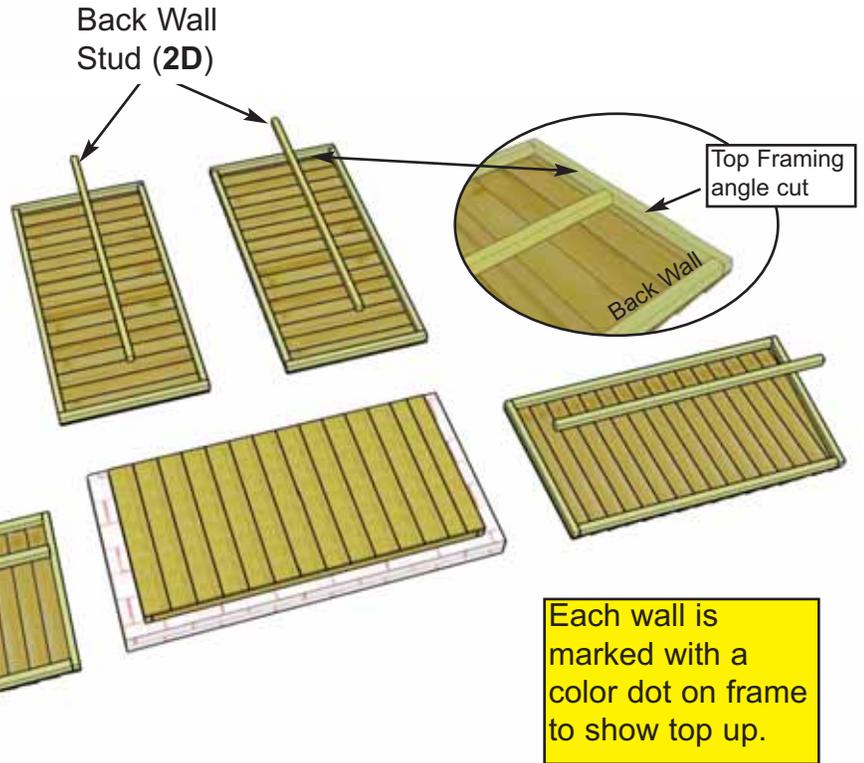


3. Center Studs on each wall and attach with 1 - 2 1/2" Screw (C) per end. Flip walls over.

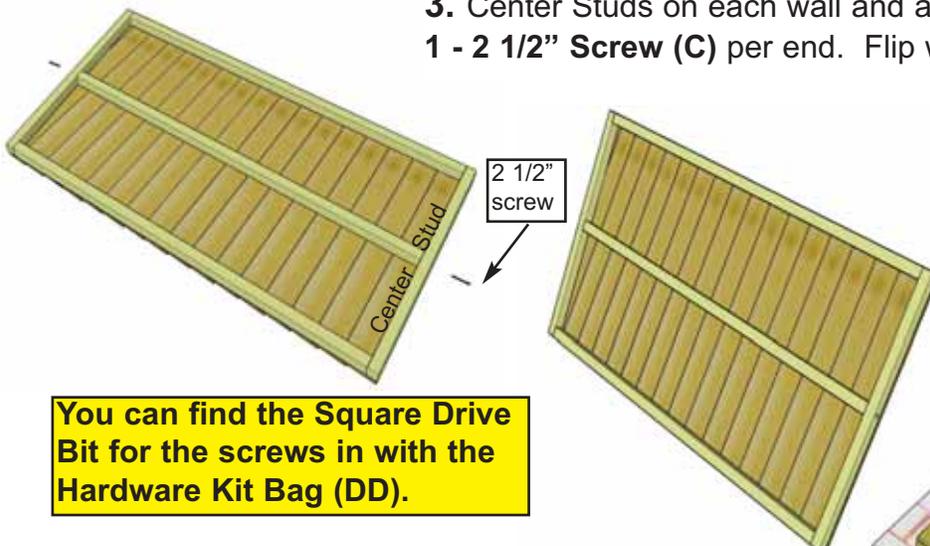

4. Using a tape measure or chalk line as a nailing line, attach wall studs to siding with 1 - 1 1/2" Finishing Nail (K) per piece of siding. Nail into thick part of siding (butt). Skip bottom and top siding pieces. Complete all stud attachments now.


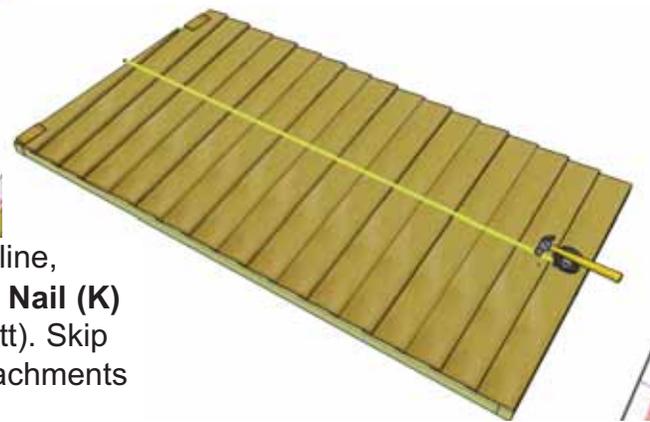


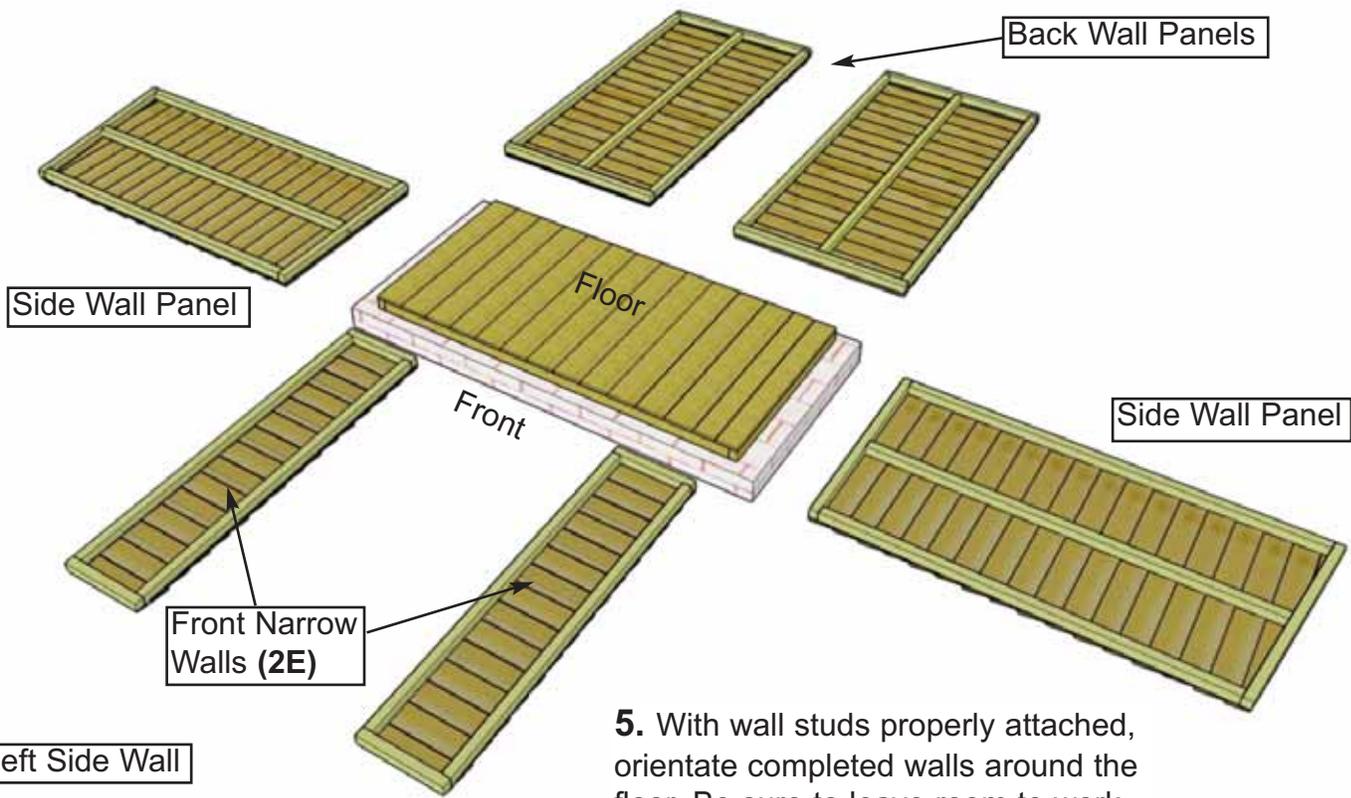

5. With wall studs properly attached, orientate completed walls around the floor. Be sure to leave room to work. **Front Narrow Wall (2E)** will be required in this section.



Before completely attaching walls to floor (**Steps 6-12**), check to make sure door opening is 41" wide. See **Step 13** for illustration.

Angled Left Side Wall

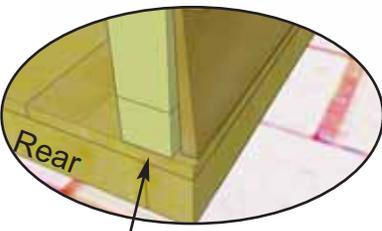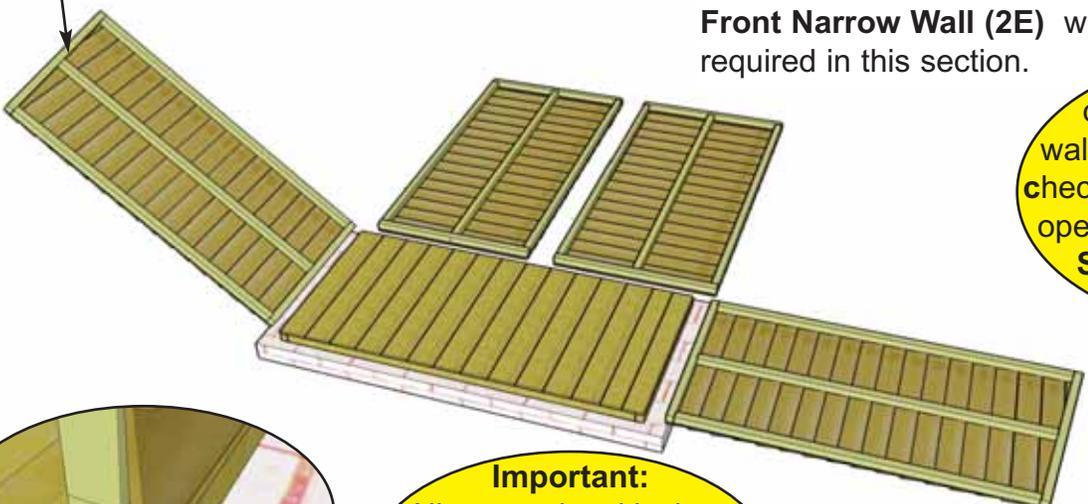

Important: Alignment is critical **Steps 6 - 8**. Ensure Tips of siding are flush with edge of floor.


4 - 2 1/2" Screws

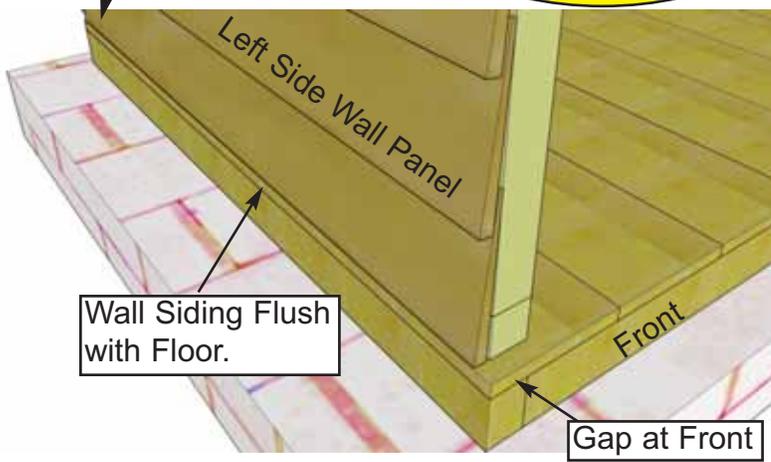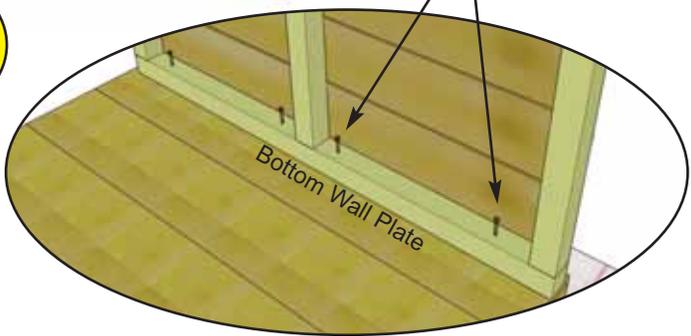



Wall Siding Flush with Floor.

Gap at Front


6. Starting with angled left side wall, lift up and position so framing is flush with floor at rear of shed. Make sure wall siding is flush with outside of floor on the side. In the front, there will be a gap of approximately 1/2". When wall is positioned correctly, secure bottom wall plate to floor with **4 - 2 1/2" Screws (C)**.

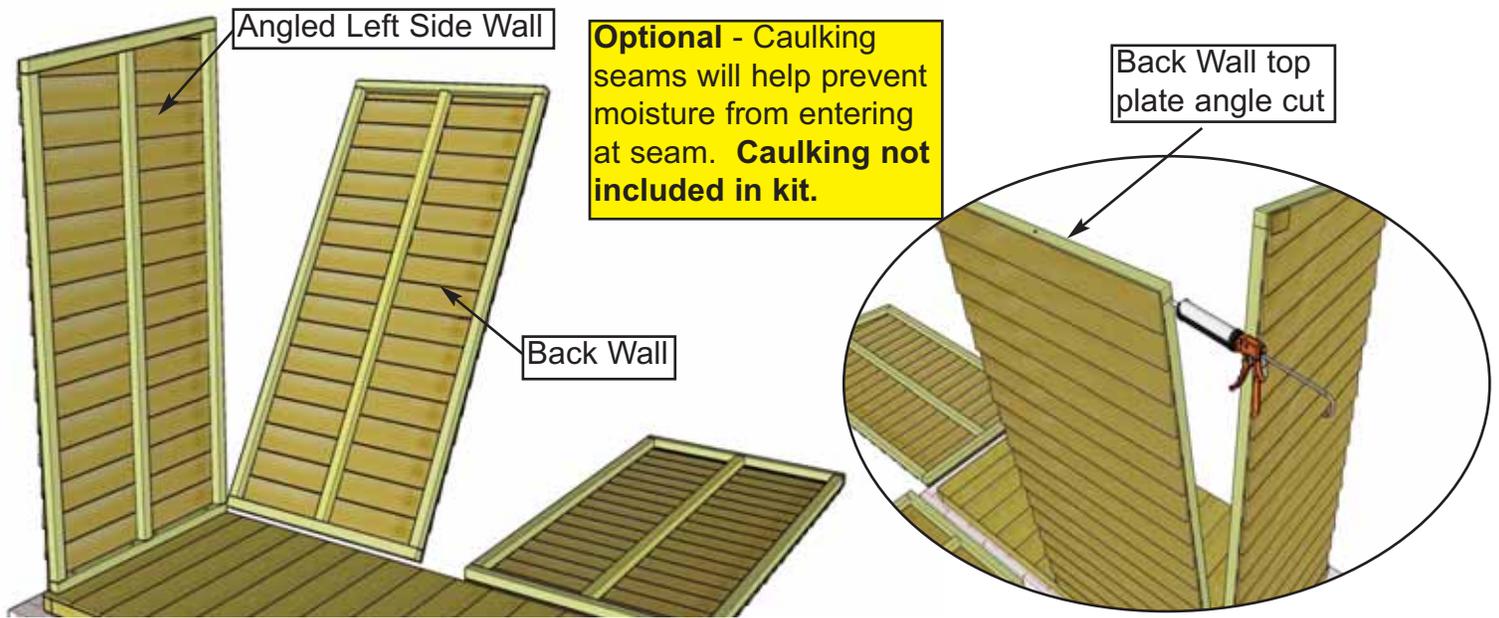


7. With your helper holding the side wall panel, position a **Back Wall Panel (2C)** in rear corner. **Important: Align Wall Siding Flush with Floor Framing.**

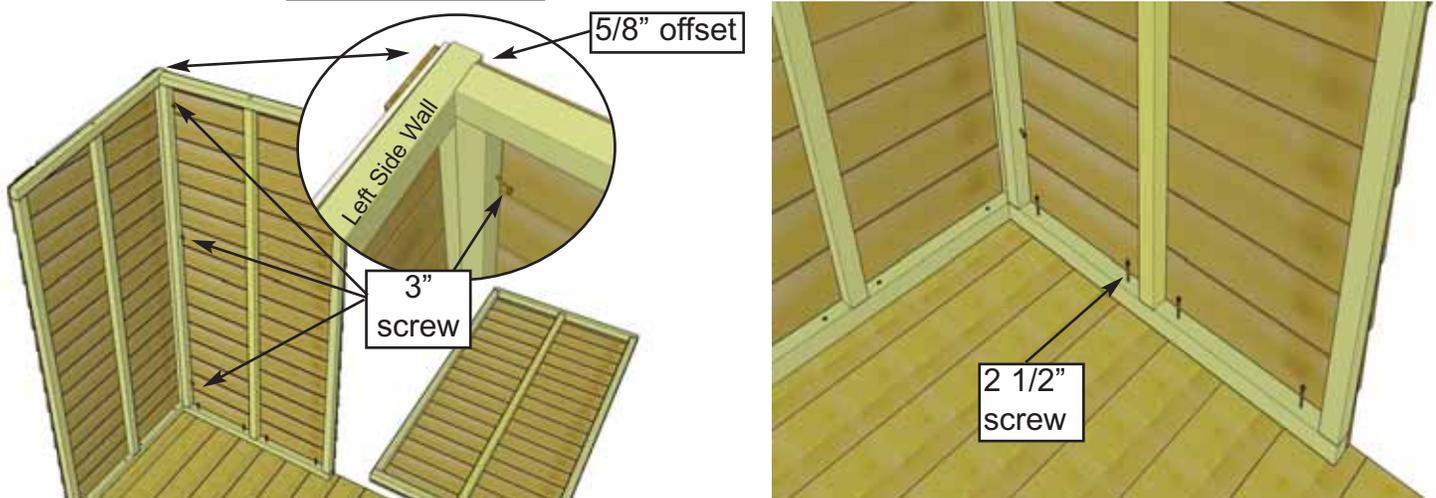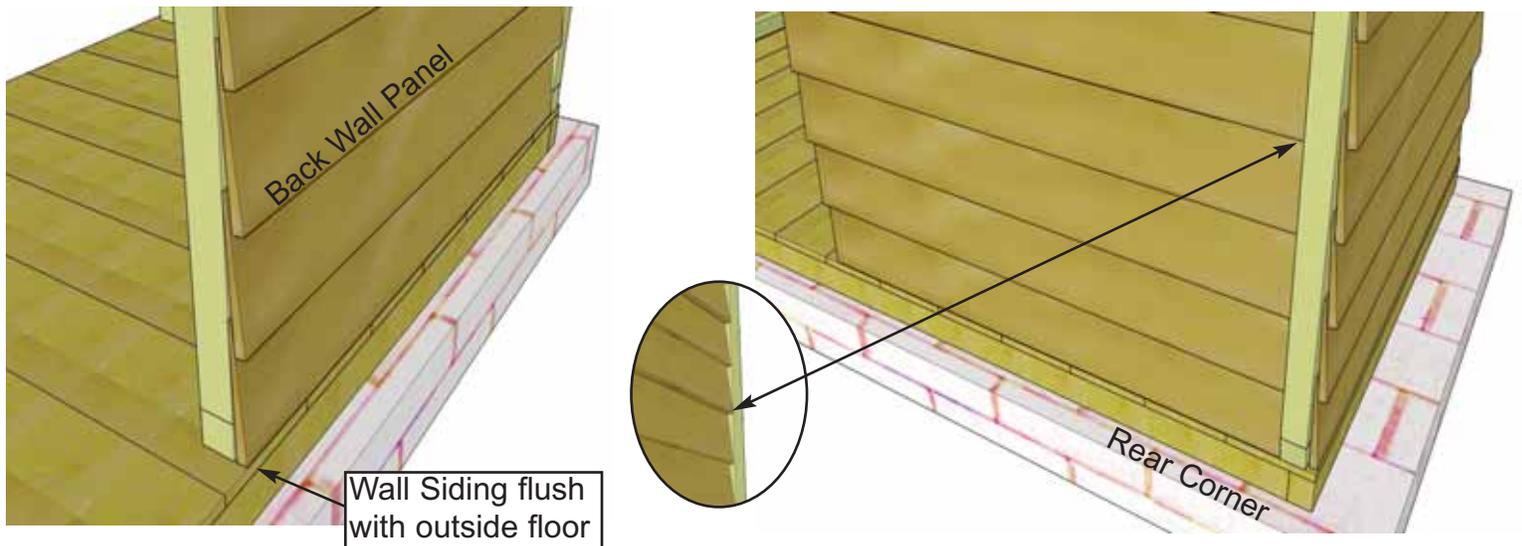



8. When side and back walls are aligned in corner correctly, wall framings will be offset. Screw wall framings together with **3 - 3" Screws (B)**. Secure bottom wall plate to floor with **4 - 2 1/2" screws (C)**.

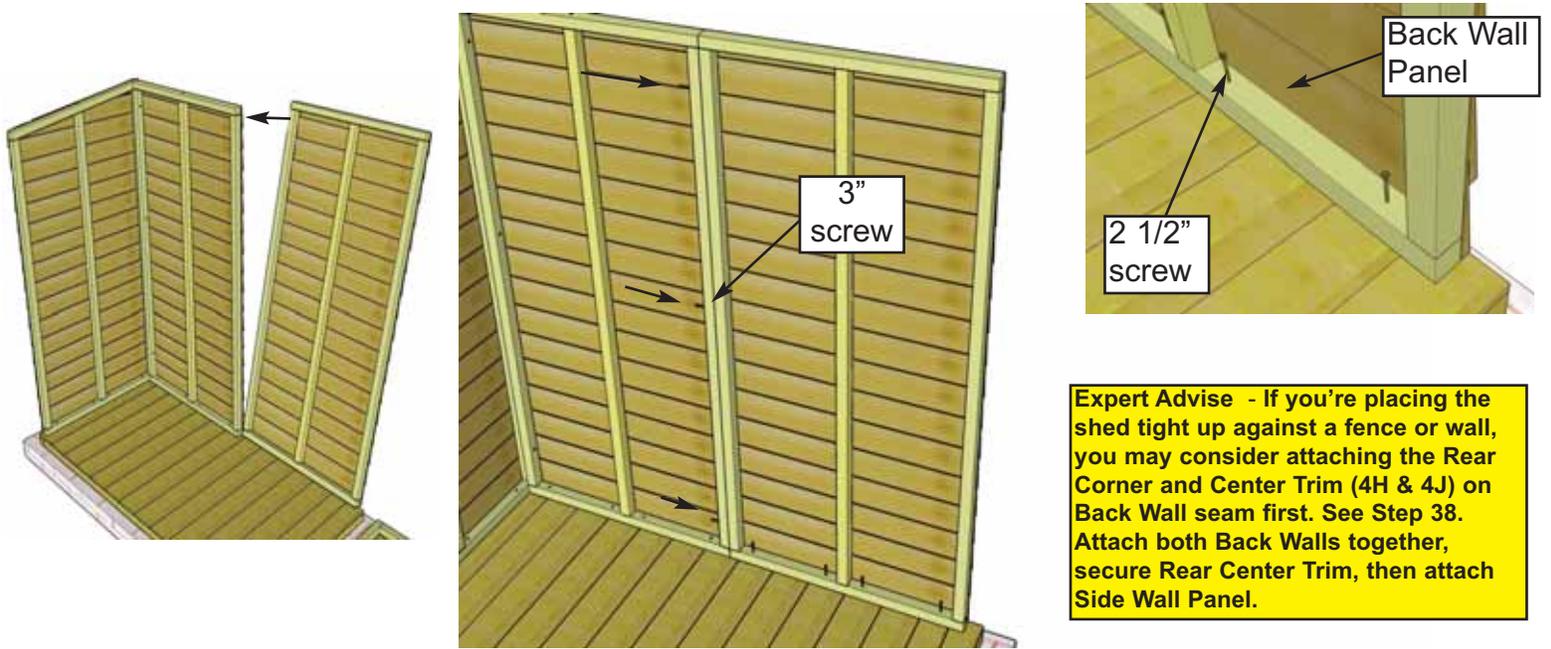

9. Position 2nd **Back Wall Panel (2C)** on Floor as per **Step 8**. Attach wall frames together at top, middle and bottom with **3 - 3" screws (B)**. Secure bottom wall plate to floor with **4 - 2 1/2" Screws (C)**.

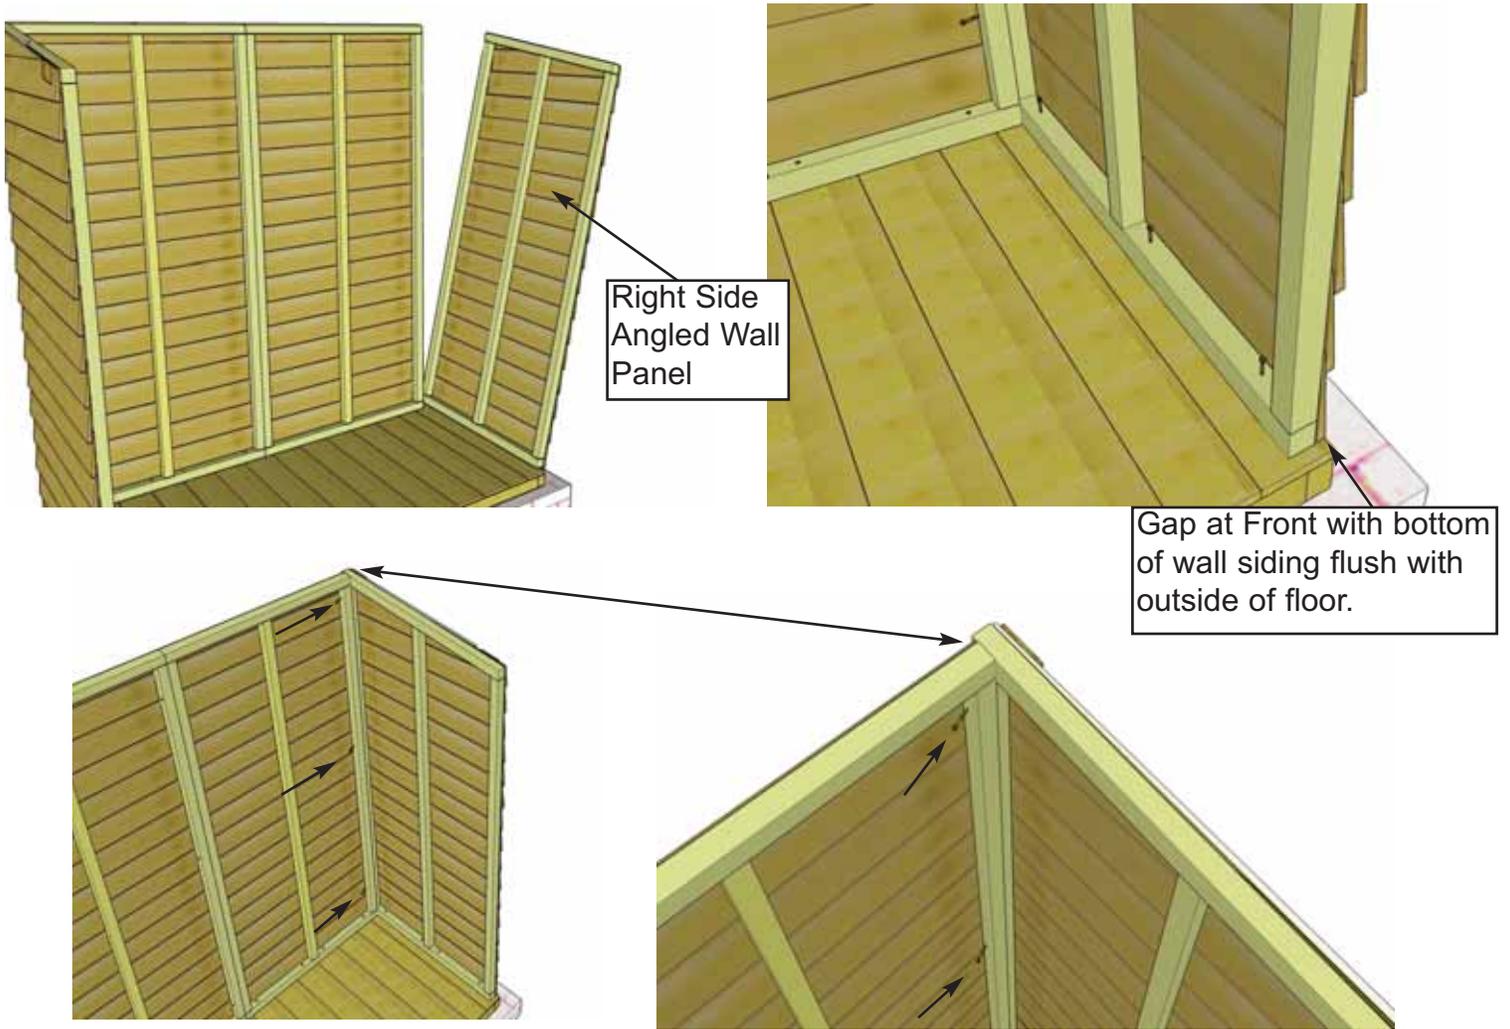


10. In the corner, align and attach right **Side Wall (2A)** framing to back wall framing as per **Steps 7 & 8**. Secure bottom wall plate of side wall to floor with **4 - 2 1/2" Screws (C)**.

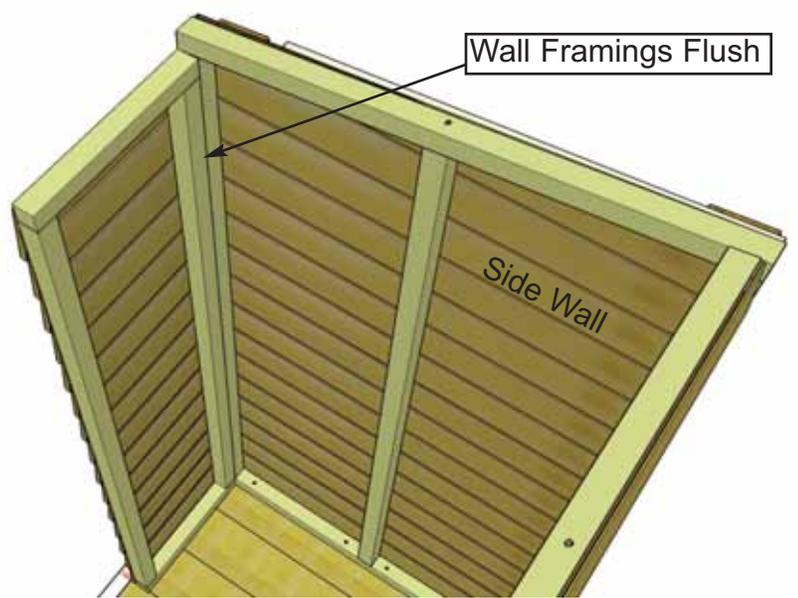
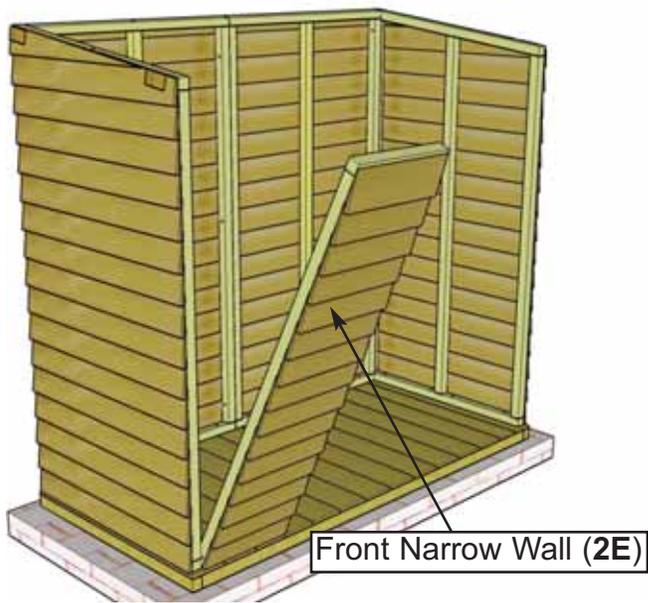


11. Locate **Front Narrow Walls (2E)** and position wall framing flush with side wall framing in corner. Make sure narrow wall is positioned right side up.

Wall Siding Flush with Floor Framing.
 Before attaching, make sure door opening is 41" wide.
See Step 13.

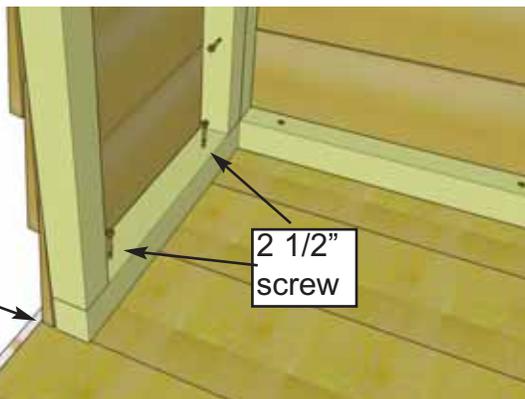


12. Align butt or bottom of wall siding flush with outside of floor framing. When correctly positioned, secure bottom wall plate to floor with 2 - 2 1/2" Screws (C). Attach vertical wall framings together at top, middle and bottom with 3 - 3" Screws (B).

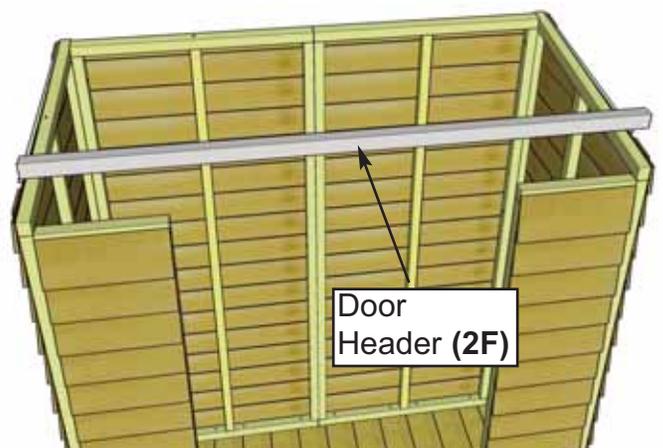
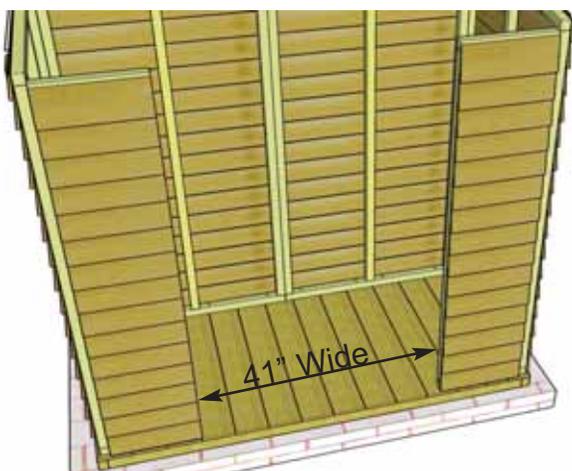


13. Align and attach the second front narrow wall panel as per **Step 12**.

14. Locate **Door Header (2F)** (1 1/2" x 1 1/2" x 70") and place on top of front narrow wall framings.

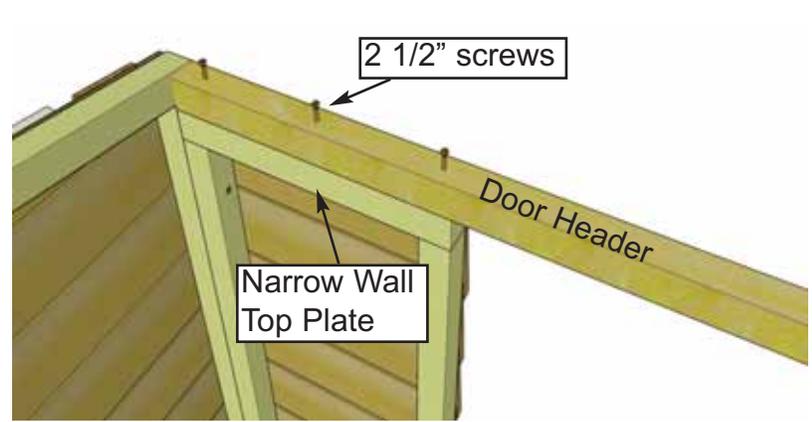


15. With door header positioned evenly on narrow wall top plates and flush against side wall top framing, secure using **6 - 2 1/2" Screws (C)** screwing down from the top of door header down into the upper narrow wall plates. Have your helper push side walls against end of door header to achieve tight fit if possible.

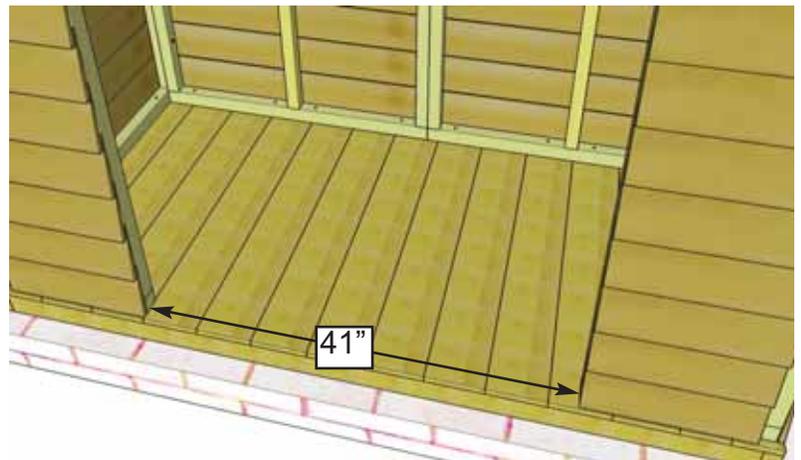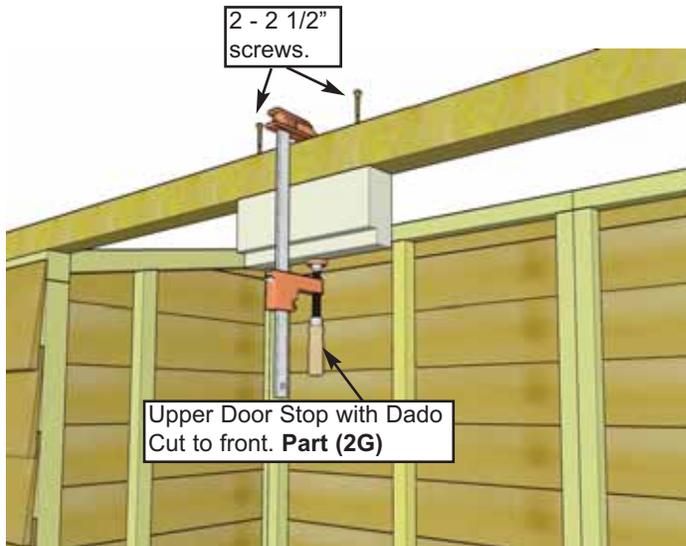


16. Attach **Upper Door Stop (2G)**. Dado cut aligned to the front. Center on door header and attach with **2 - 2 1/2" Screws (C)**. Screw down from the header into Stop. Use Clamp to hold stop.


17. When all walls are attached together, check door width at top and bottom. Door width should be 41" wide. If required, loosen narrow and side wall plate screws, adjust door width and re-secure. There can be an 1/8" tolerance in the width but top and bottom width should be the same.

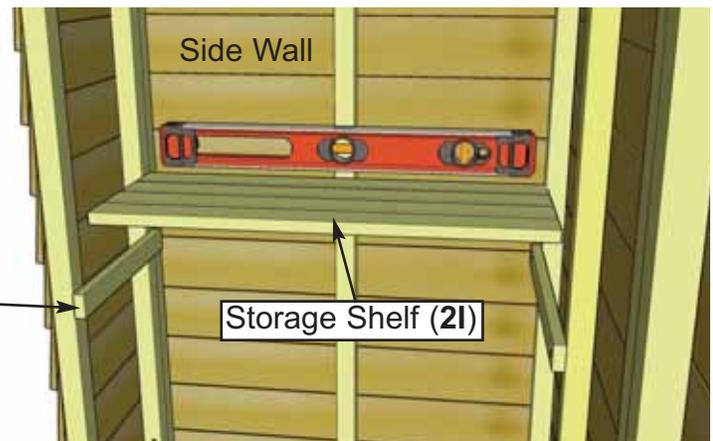


18. Storage Shelf positioning is flexible so decide what height configuration suits your needs. Gather your **Storage Shelf Supports (2H)**. The short Support (14 1/2") attaches to the narrow wall, the long (18 1/4") to the back wall. Position using a Level, and drill Pilot Holes to prevent ends of Supports from splitting. Attach first Support using **2 - 1 1/4" Screws (E)**. Place Storage Shelf on attached Support, Level, and mark position of 2nd Support. Pilot Hole and secure 2nd Support.

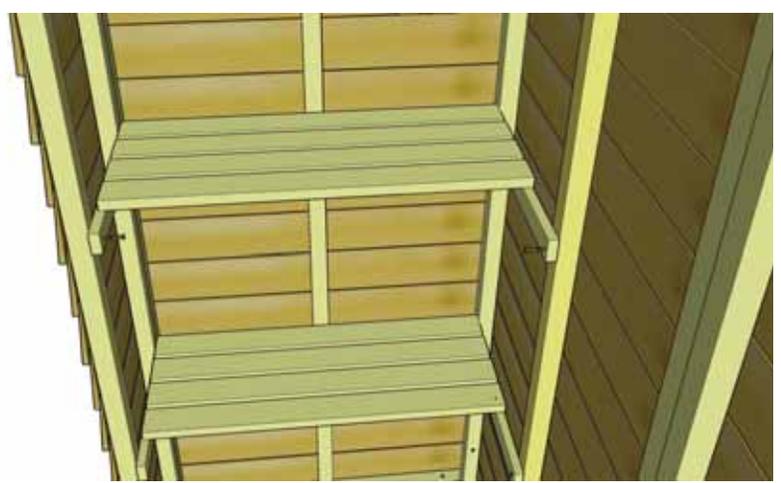



19. Place **Storage Shelf (2I)** on top of supports and secure with **4 - 1 1/2" Finishing Nails (K)**. Complete 2nd Shelf (if desired) as per **Steps 18 & 19**.

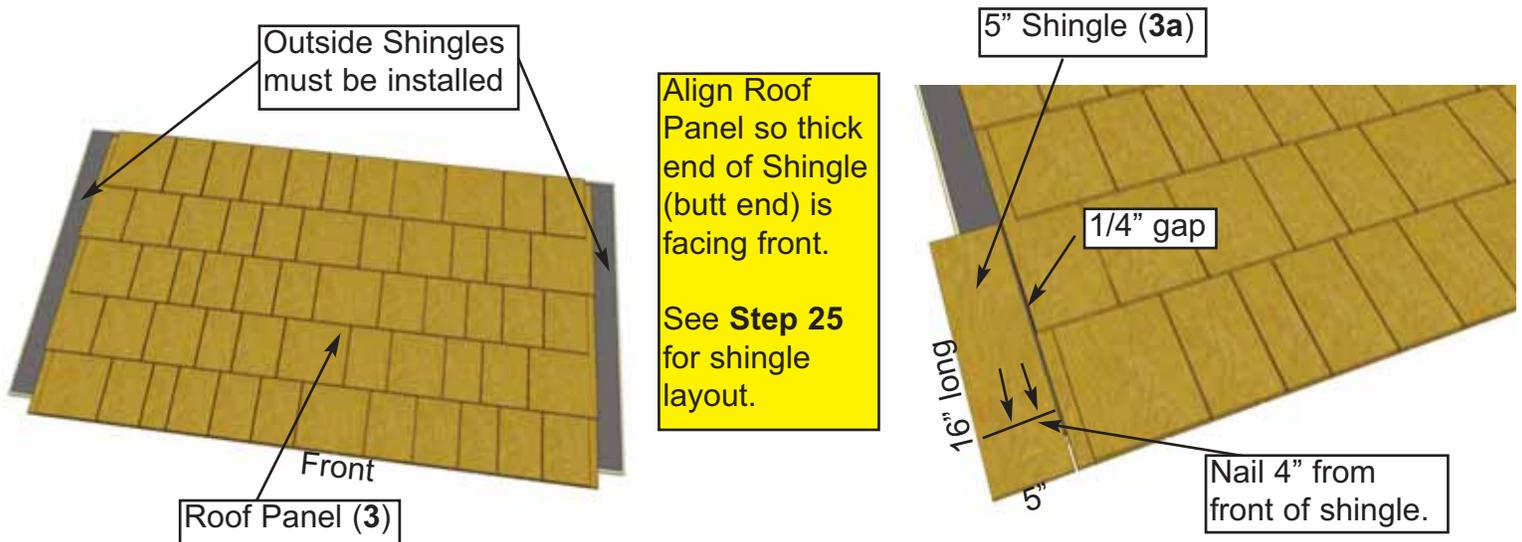



20. Lay **Roof Panel (3)** on flat level ground. Note, overhanging Outside Shingles have been removed to avoid shipping damage and need to be installed. Locate **(3A , 3B & 3C) Shingles**. There are 6 - 5" wide x 16" long **(3A)** Shingles, 4 - 6" wide x 16" long **(3B)** Shingles and 2 - 6" wide x 12" long **(3C)** Shingles. Position and attach **(3A)** Shingle (5" wide) on roof panel with **2 - 7/8" Shingle Nails (M)**. See above for details.

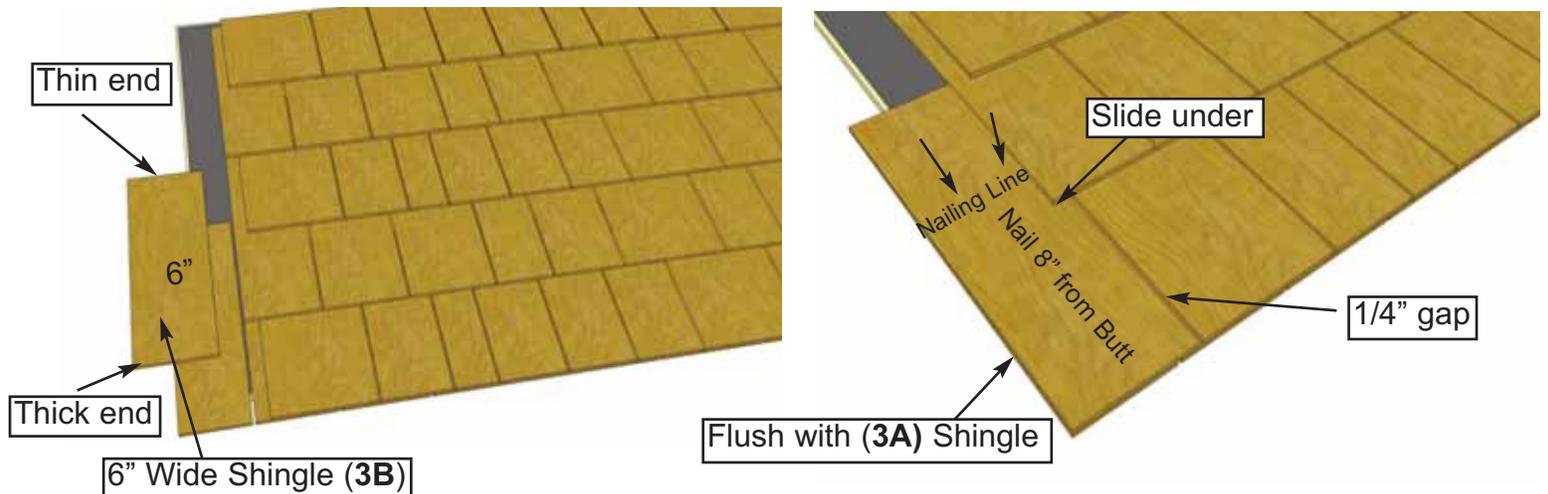



21. Place and attach **(3B)** Shingle (6" wide) directly on top of Shingle **(3A)**. Shingle **(3B)** will slide under 2nd row shingle. Secure with **2 - 7/8" Shingle Nails (M)** 8" from butt.

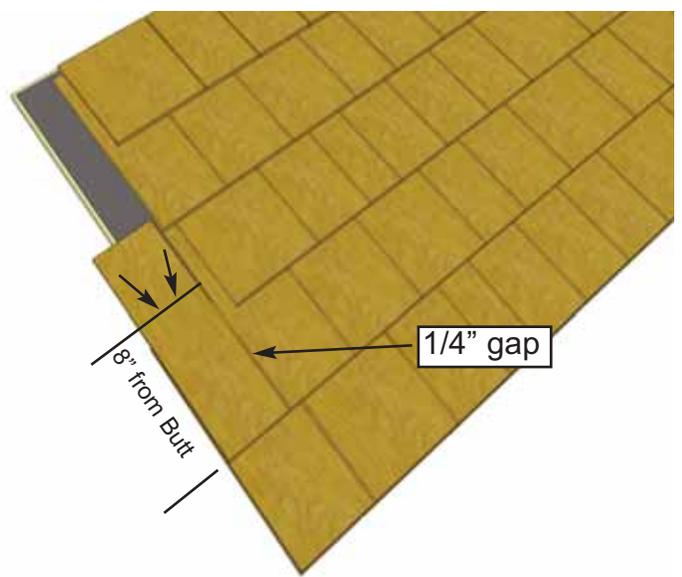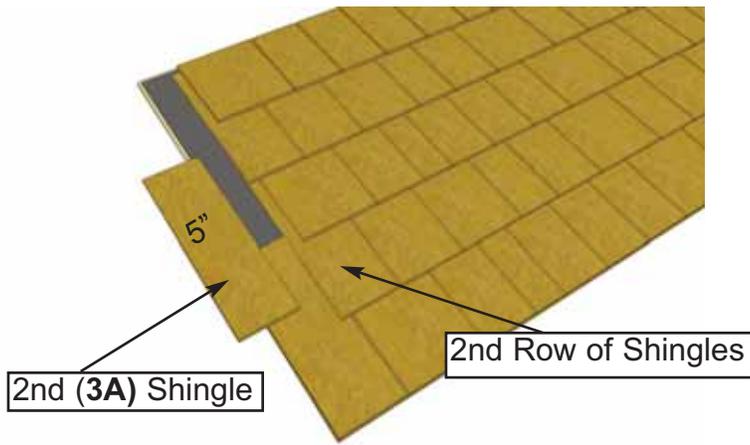


22. Place and attach second (3A) Shingle (5" wide) in line with 2nd row of shingles. Shingle (3A) will partially cover shingle (3B). Secure with 2 - 7/8" Shingle Nails (M) 8" from butt.

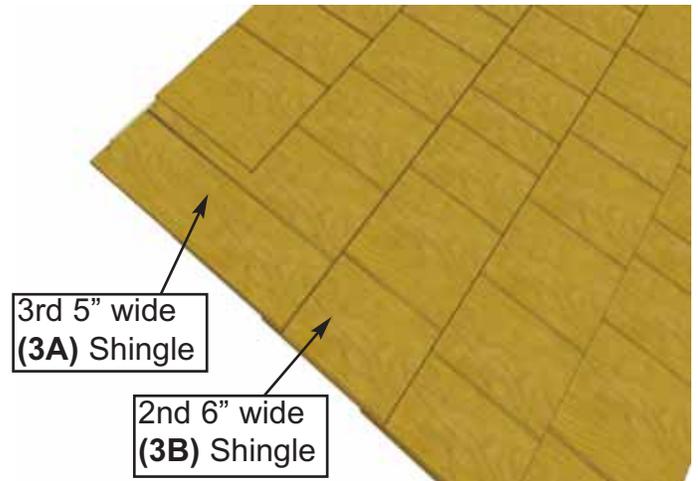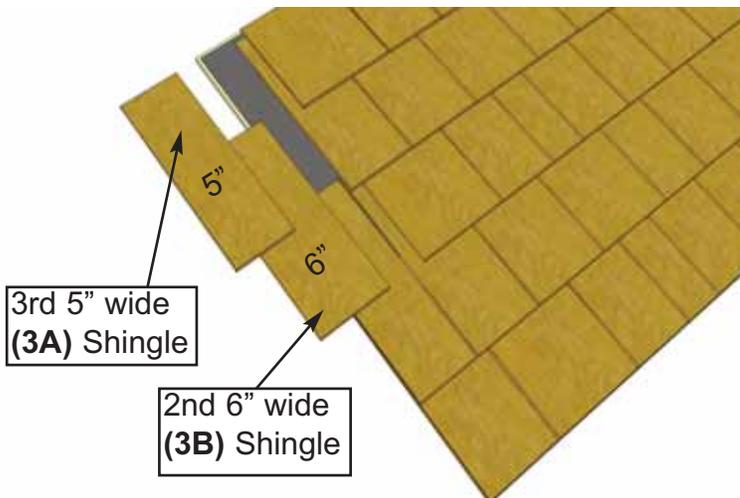


23. Place and attach 2nd (3B) Shingle (6" wide) in line with 3rd row of shingles. Shingle (3B) will partially cover shingle (3A). Secure with 2 - 7/8" Shingle Nails (M) 8" from Butt. Complete attachment of 3rd 5" wide (3A) shingle.

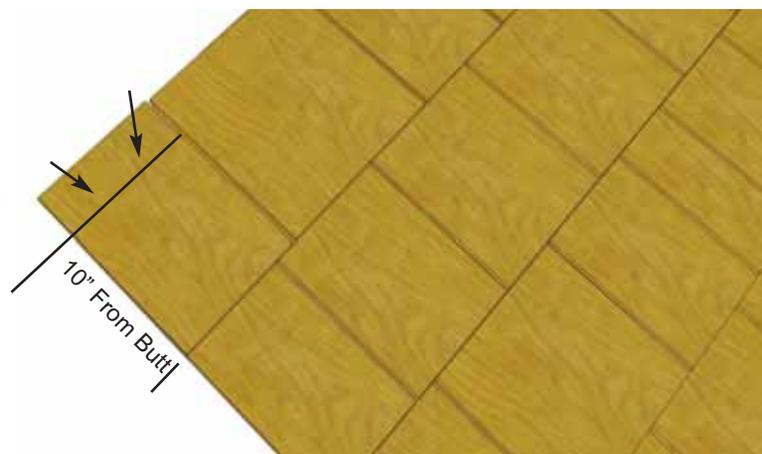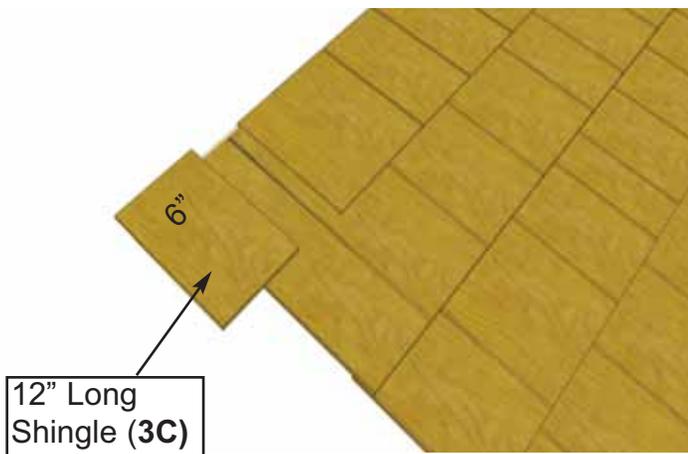


24. To finish end, place and attach (3C) shingle (6" wide x 12" long) in line with 5th and final row of shingles. Shingle (3C) will partially cover shingle (3B). Secure with 2 - 7/8" Shingle Nails (M) 10" from butt.

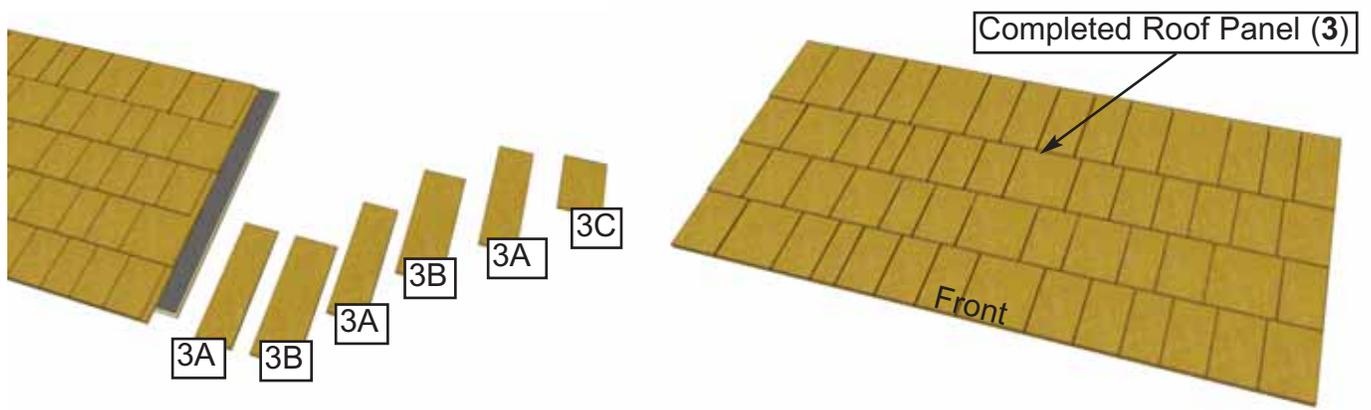

25. Complete attachment of shingles on opposite side of roof panel following **Steps 20-24.**

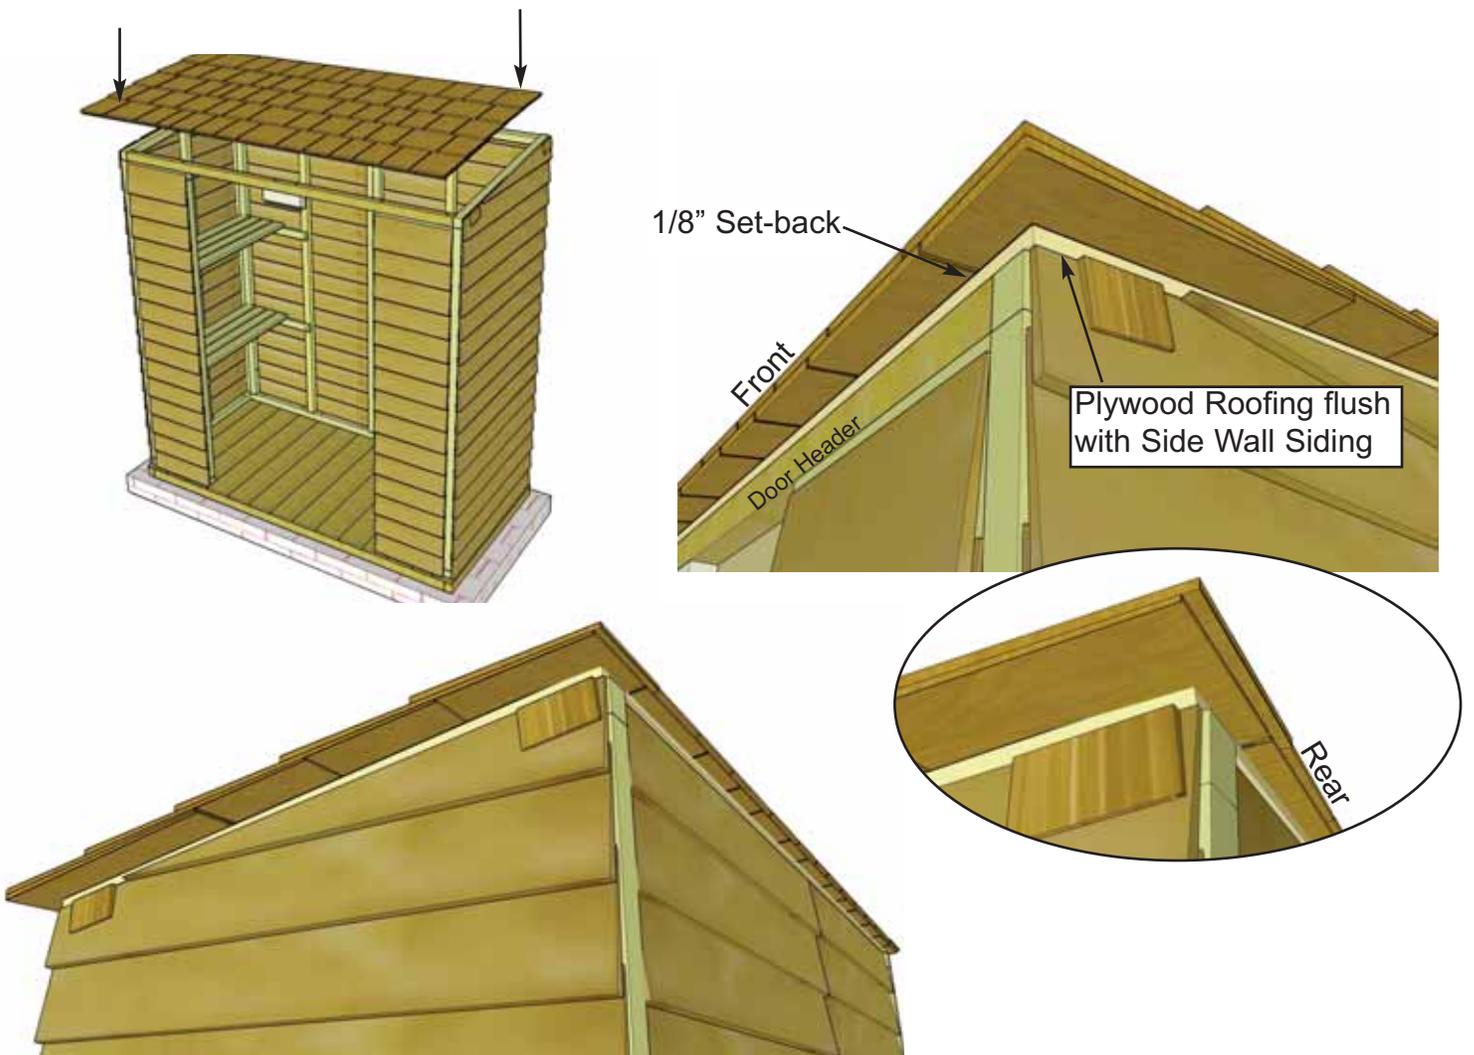


26. Lift up completed cedar shingle roof panel and place on upper wall framing. In the front, align plywood roofing 1/8" back from door header. On the side, plywood should be flush with side wall siding. Equally space roof from side-to-side. In the rear, plywood should sit on back wall top plate.

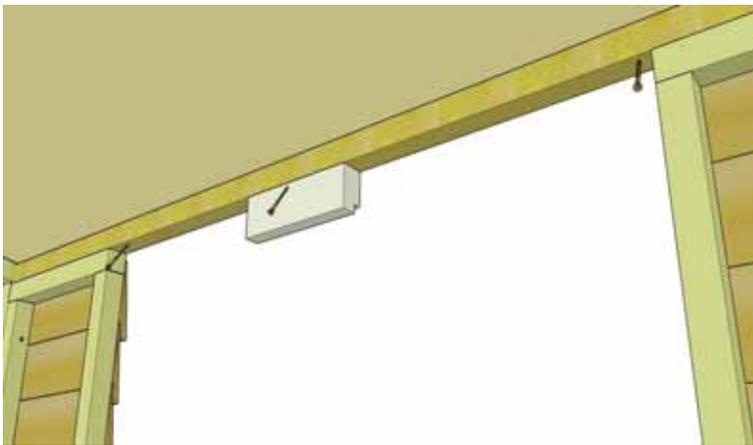


27. From inside the shed, start securing the roof by screwing the door header into Roof Panel on an angle with **3 - 2 1/2" Screws (C)**. Make sure screw tips do not go completely through roof panel. On the sides and rear, screw from upper framing into Roof Panel. Use 2 screws per each wall panel. Screw on an angle and make sure screw tips do not go completely through roof panel.




28. Locate 2 **Front Filler Trims (4A)** (1 1/2" x 5/8" x 65"). Filler trim will be covered by corner trim in **Step 37**. Attach in each front corner with **6 - 1 1/2" Finishing Nails (K)**.

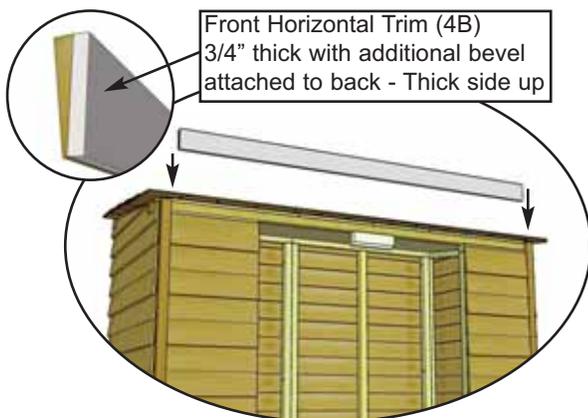

29. Locate **Front Horizontal Trim (4B)** (3 1/2" x 1 1/4" thick at top x 68 1/4"). Position horizontal trim tight up underneath roof panel. From side-to-side evenly space. Secure with **6 - 2 1/2" Screws (C)** into door header.

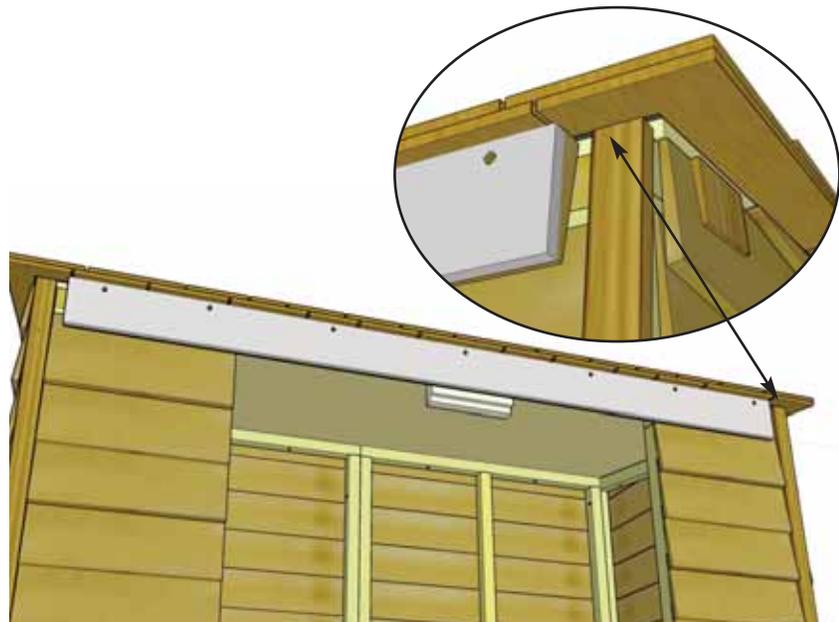

Only one nail until spacer attached on Step 31.

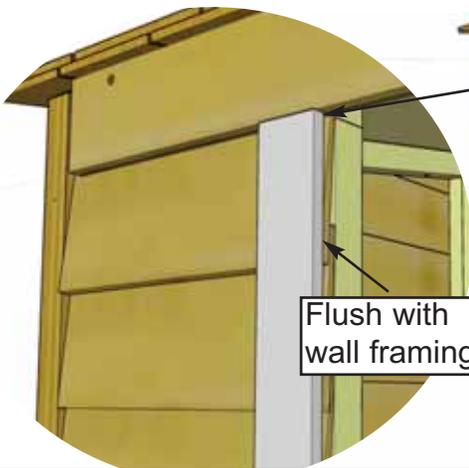



Flush with wall framing

Refer to **Step 43** before attaching door trim and do a dry run.





1 nail into butt of 2nd piece of wall siding.


30. Locate 2 **Vertical Door Frame Trims (4C)** ($1/2'' \times 2 1/2'' \times 64 1/4''$). Position on front narrow wall flush with outside of wall framing and tight underneath front horizontal trim. Attach with 1 - $1 1/2''$ **Finishing Nail (K)** on second piece of wall siding into the butt (where trim and siding touch).

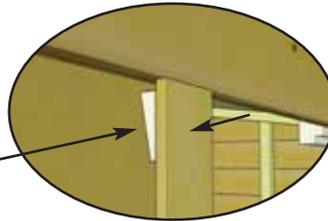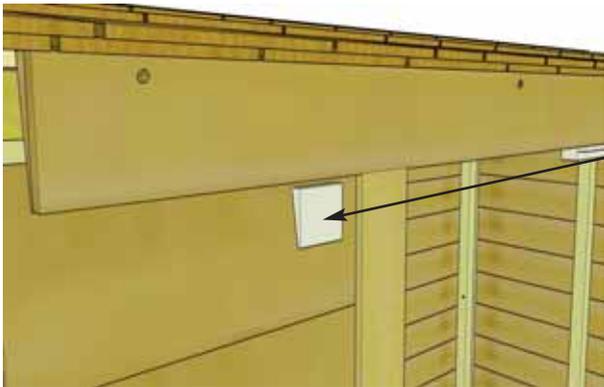


31. Locate 2 **Door Trim Spacers (4D)** found in the Hardware Bag with **Plywood Spacer (UU)**. Slide door spacer between door trim and wall siding. Attach with 1 - $1 1/2''$ **Finishing Nail (K)**. Nail through trim and into spacer. **Complete attachment of door trim using 4 more $1 1/2''$ Finishing Nails (K).** Make sure to align trim accordingly. Complete both sides.

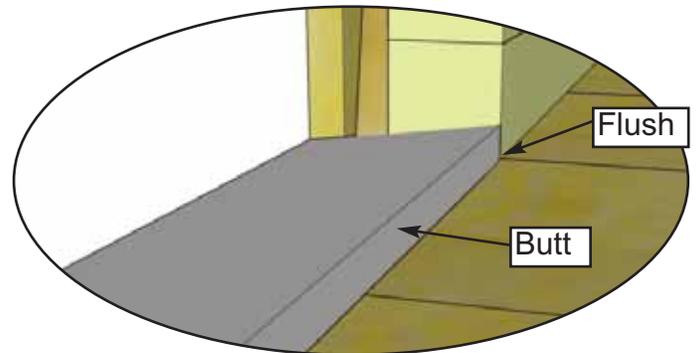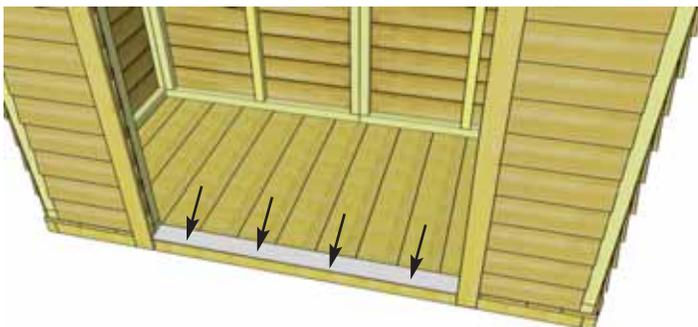


32. Locate **Door Threshold (4Q)** ($1/2''$ thick at butt x $2 5/8''$ wide x $40 7/8''$). Position threshold on floor in the opening. Align with thick side of the bevel to the inside flush with the wall stud. Attach with 4 - $1 1/4''$ **Screws (E)**.

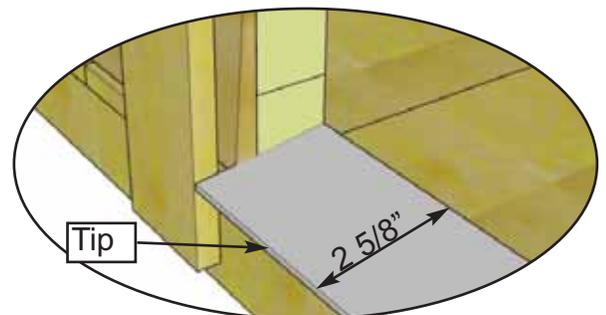


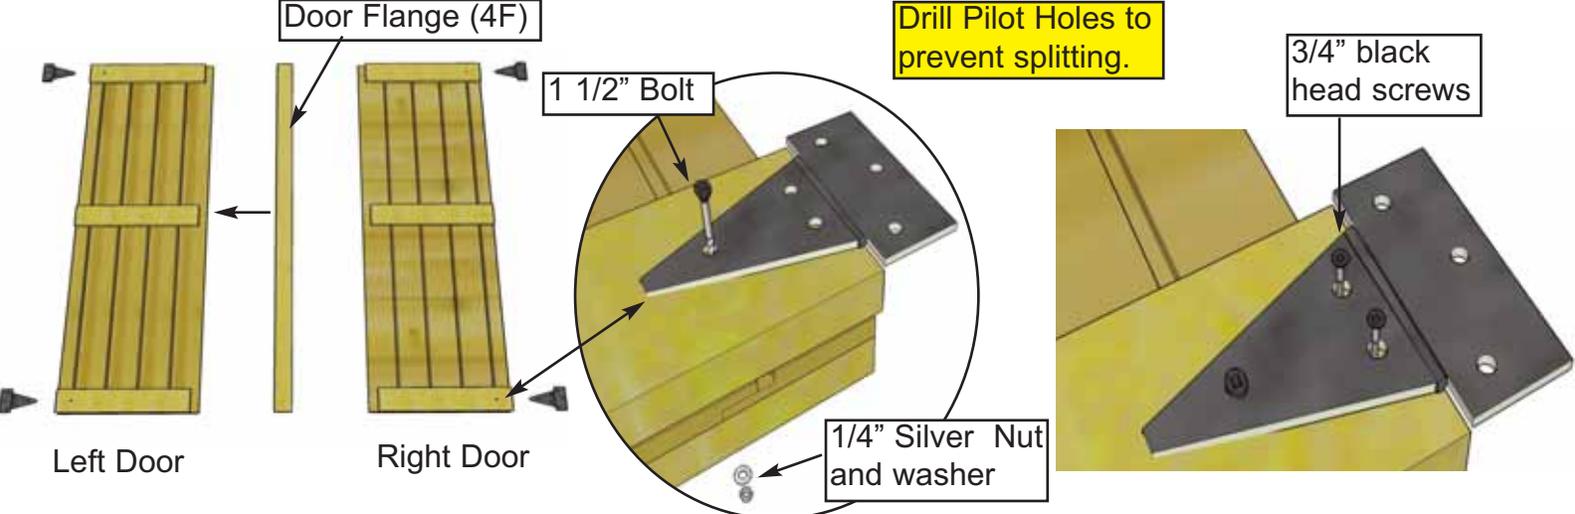


33. Locate **Doors (4E- 2 identical)** and **Door Flange (4F) (1/2" x 2 1/2" 61 3/8")**. Orientate Doors so the outside of each door is facing up and the pre-drilled holes located in each corner are positioned to the outside. Locate **Black T- Hinges (U)**. Attach each hinge to door as above with **1 - 1 1/2" Black Headed Bolt (FF)**, and a **1/4" Silver Nut**, using a 3/8" wrench. Finish hinge by securing with **2 - 3/4" Black Headed Screws (J)**. Drill small pilot holes first to prevent wood from splitting. Complete both doors(4 Hinges).

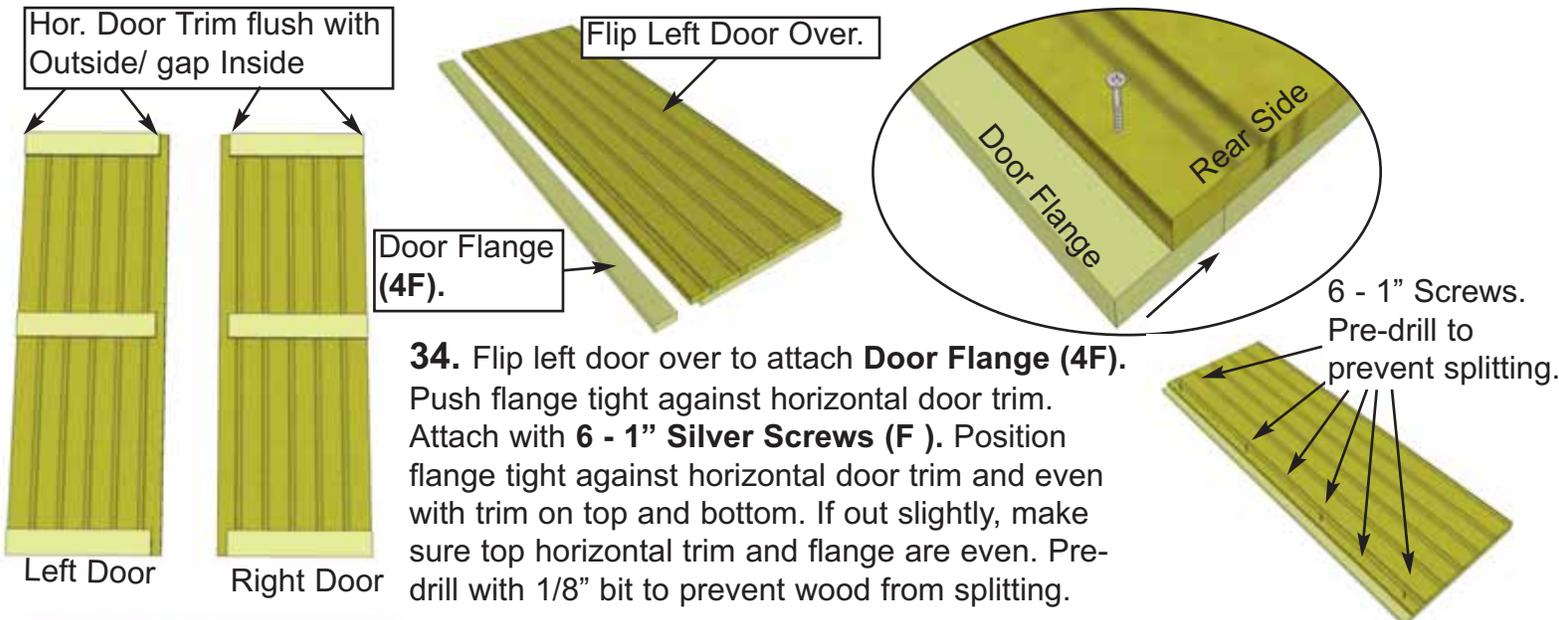

34. Flip left door over to attach **Door Flange (4F)**. Push flange tight against horizontal door trim. Attach with **6 - 1" Silver Screws (F)**. Position flange tight against horizontal door trim and even with trim on top and bottom. If out slightly, make sure top horizontal trim and flange are even. Pre-drill with 1/8" bit to prevent wood from splitting.

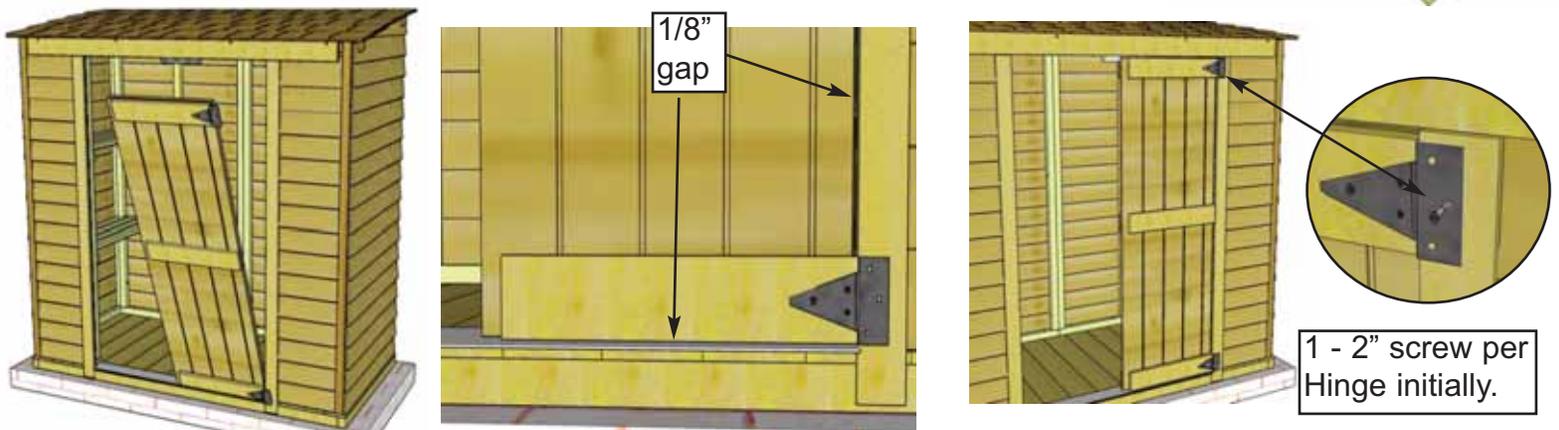

35. Starting with right door first, lift and position door in opening. Leave a 1/8" gap on right side and 1/8" gap on the bottom. Use a **Shim Shingle (4T)** to shim the door at bottom to help position door evenly. When door is aligned correctly, screw hinge into vertical door frame trim with **1 - 2" Black Headed Screws (H)**. Use only 1 screw initially per hinge until both door alignments are confirmed. Drill pilot holes to prevent wood from splitting.

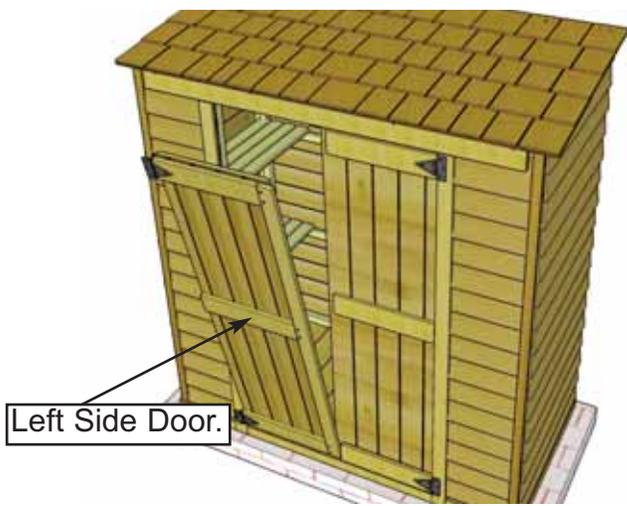


36. Position left side door (with flange) as per **Step 35**. Once again, use only **1 - 2" Black Headed Screw (H)** per hinge initially to secure door to vertical door frame trim.

Note: Trim pieces are graded with the best face being rough. Rough sawn cedar is much easier to paint and stain and is the industry standard.



37. With both Doors partially attached, check to see doors open and close correctly. Make any necessary adjustments and when satisfied, completely secure hinges to vertical door frame trim with **two more 2" Black Headed Screws (H)** per hinge. Drill pilot holes to prevent wood from splitting.

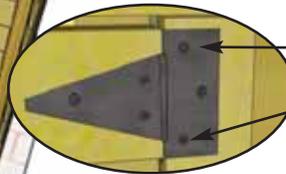


2 more - 2" screw per Hinge

Expert Advice:
Do a dry run with front and rear corner trims before attaching. Confirm the rough face is configured correctly and small trim gaps are satisfactory before attaching.





Front Side Corner Trim (4H)
2 1/2" wide.
Angle cut 8 deg. at top


Front Corner Trim (4G)
3 1/2" wide.

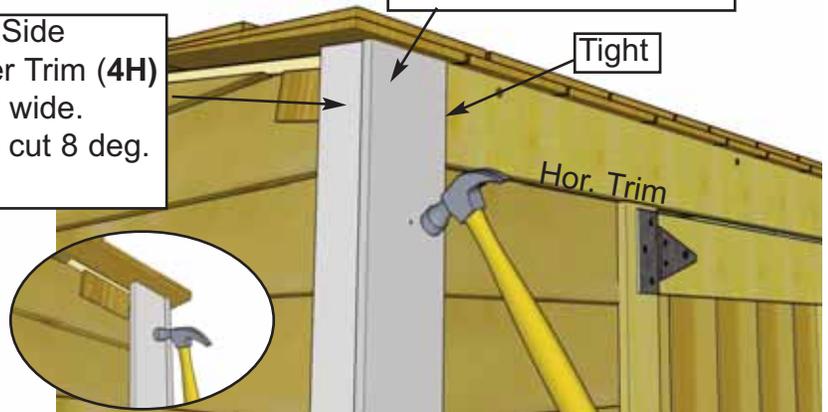

38. Locate a **Front Corner Trim (4G)** (1/2" x 3 1/2" x 67 3/4") (1 for each front side), and **Front Side Corner Trim (4H)** angle cut 8 deg. at top (1/2" x 2 1/2" x 68 1/4"). Angled side trim pieces are unique to each corner and are attached **rough side out**. Starting in one corner, position both trims up tight underneath roof shingles. Align front corner trim tight against horizontal door trim. Front corner trim will cap front side corner trim. When correctly aligned, attach each piece with **6 - 1 1/2" Finishing Nails (K)**.

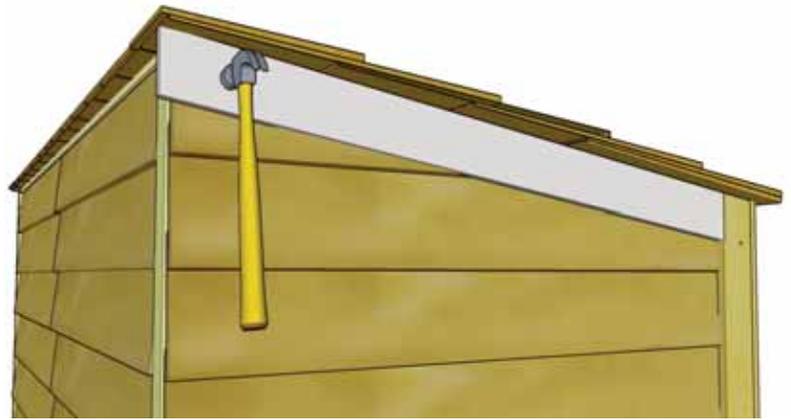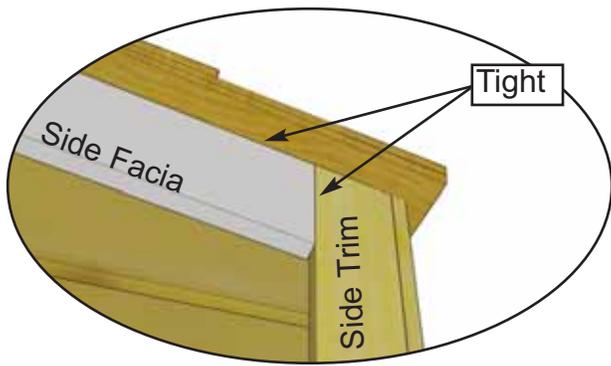


39. Continuing around the shed, place a **Side Facia Trim (4I)** angle cut both ends ($1/2'' \times 2 1/2'' \times 33 7/8''$) tight against front side corner trim and snug underneath roof panel. Attach side facia into side wall cleats with **4 - 1 1/2'' Finishing Nails (K)**.


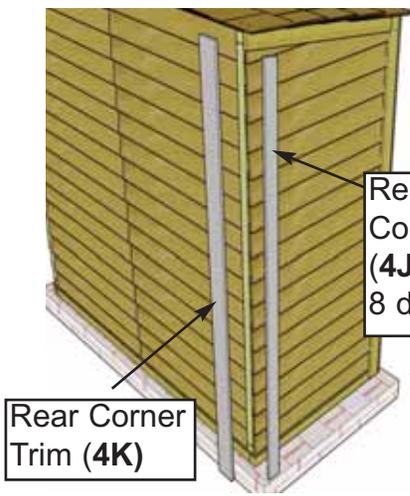


Rear Side Corner Trim (4J) -angle cut 8 deg. at top.


Rear Corner Trim (4K)

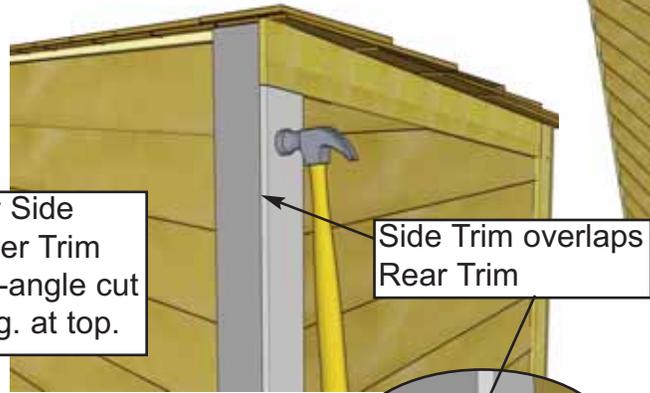

Side Trim overlaps Rear Trim

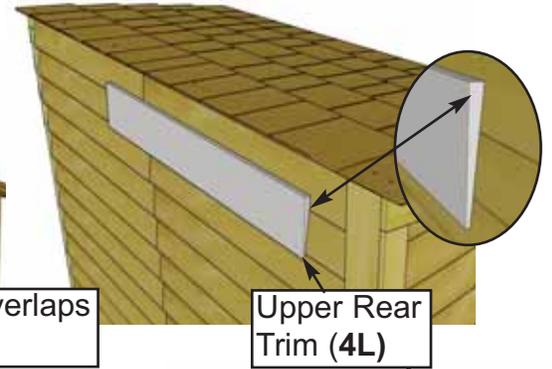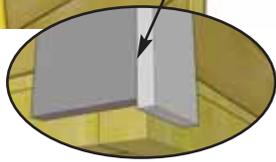

Upper Rear Trim (4L)

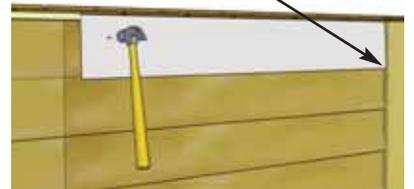

40. Locate a **Rear Side Corner Trim (4J)** angle cut 8 deg. at top ($1/2'' \times 2 1/2'' \times 70 1/4''$) and **Rear Corner Trim (4K)** ($1/2'' \times 3 1/2'' \times 72''$). Once again, angled side trim pieces are unique to each corner and are attached **rough side out**. Position side trim tight underneath side facia. Align rear corner trim tight underneath roof shingles. Side trim will cap rear trim. Attach each pieces with **6 - 1 1/2'' Finishing Nails (K)**. Locate **Upper Rear Trim - Bevel Siding (4L)** ($4 1/2'' \times 32 3/8''$). Align tight against rear corner trim and underneath roof. Attach with **4 - 1 1/2'' Finishing Nails (K)**.





Rear Center Trim (4M)



41. Locate **Rear Center Trim (4M)** ($1/2'' \times 2 1/2'' \times 72''$). Align tight against upper rear trim and underneath roof. Attach with **6 - 1 1/2'' Finishing Nails (K)**.




42. Complete other rear corner, side and front corner trims as per **Steps 38 - 40.**

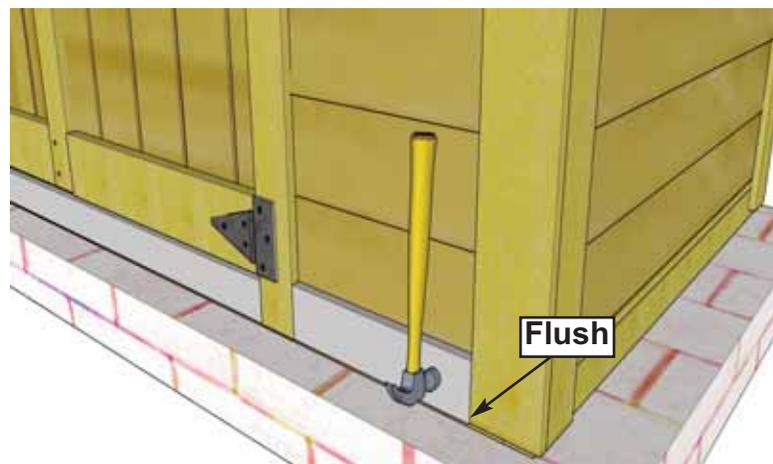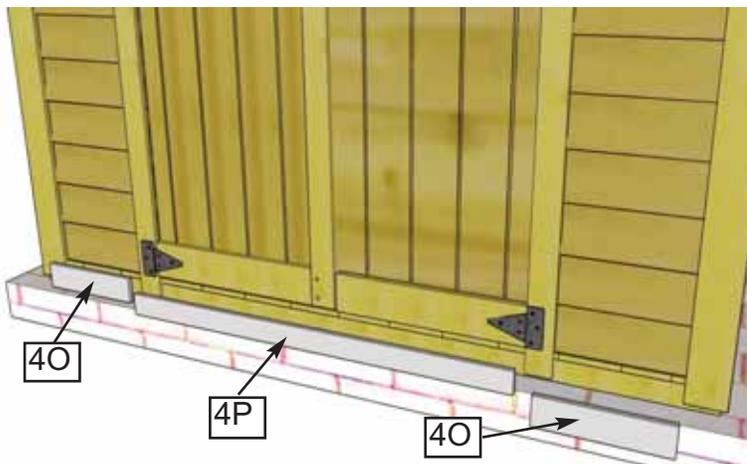

43. Locate both **Lower Front Narrow Trims (40)** ($1/2'' \times 2 \ 1/2'' \times 11 \ 1/8''$) and **Doorway Narrow Trim (4P)** ($1/2'' \times 2'' \times 40 \ 7/8''$). Place narrow wall trims between door trim and front corner trim flush with bottom of trims. Attach each with **2 - 1 1/2'' Finishing Nails**. Place lower door trim between door trims flush with bottom. Attach with **4 - 1 1/2'' Finishing Nails (K)**.




44. Attach both **Lower Side Narrow Trims (4R)** ($1/2'' \times 2 \ 1/2'' \times 31''$). Place trims between front and rear corner trims to cover part of floor frame with **4 - 1 1/2'' Finishing Nails (K)**.

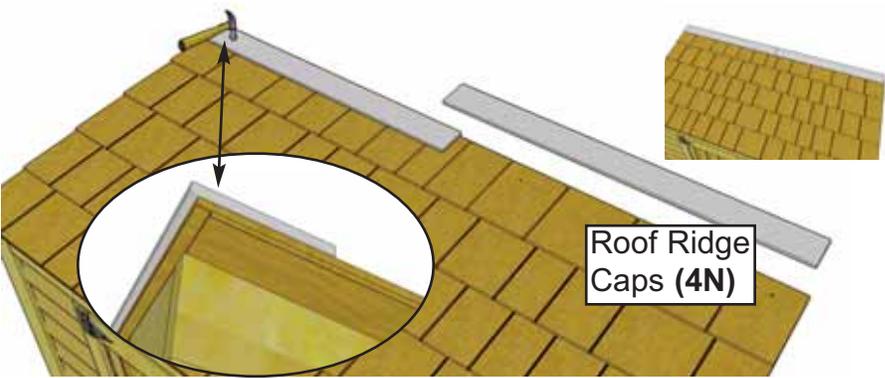

45. Using a Step Ladder, place both **Roof Ridge Caps (4N)** (1/2" x 3 1/2" x 39") on rear row of roof shingles. Ridge Caps will overhang shingles by 1/4". Attach each piece with **4 - 1 1/2" Finishing Nails (K)**.



46. Attach **Door Handles (X)** to doors with **3 - 3/4" Black Headed Screws (J)** per handle. Choose desired handle height. Make sure screws go into interior door framing and are not exposed on inside.



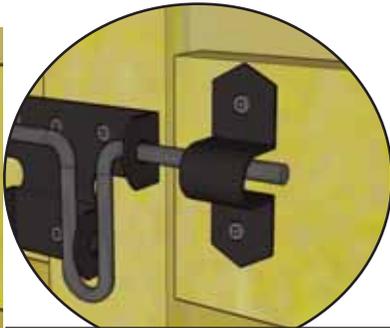


Important: Drill shallow Pilot Holes to prevent splitting.



47. Attach **Black Barrel Bolt (W)** as illustrated above with **6 - 3/4" Black Headed Screws (J)**. **Note:** Female part of barrel bolt is positioned higher than male. Do a dry run first to position barrel bolt correctly. **Important** - Drill pilot holes with 1/8" drill bit prior to securing with screws to prevent wood splitting.




48. Install the **Barrel Bolt Plywood Spacer (UU)** to interior door frame, flush at the bottom, and 1/4" from edge, as pictured. Use **2 - 1 1/4" Screws (E)** to secure.

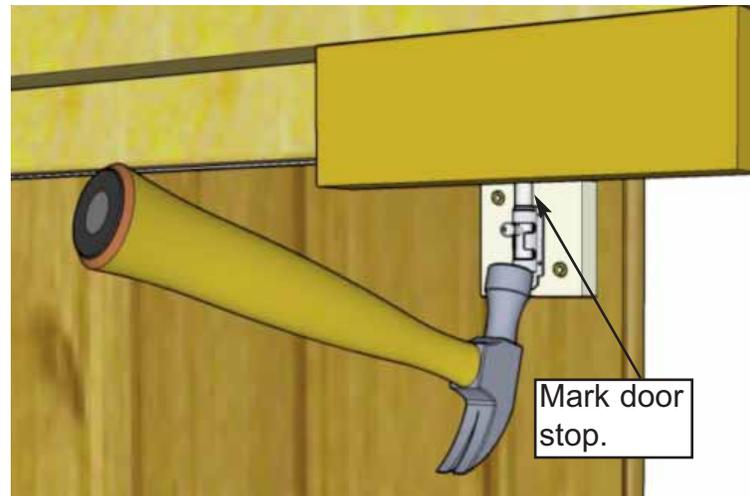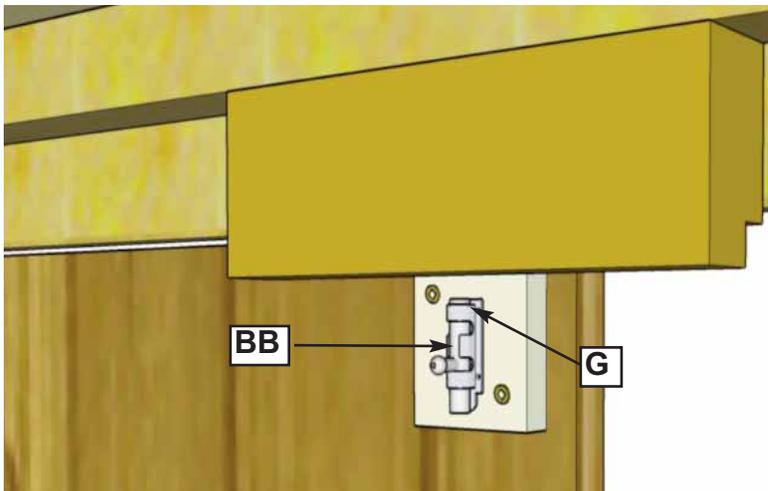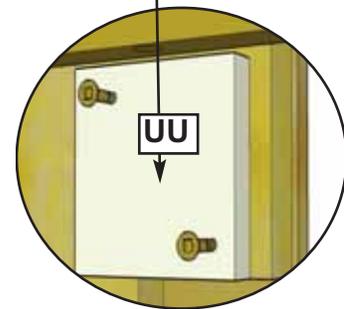

49. Position the **Interior Silver Barrel Bolt (BB)** on the plywood spacer and attach with **4 - 3/4" Silver Screws (G)**. Tap barrel bolt with hammer on underside of interior door stop to mark location.

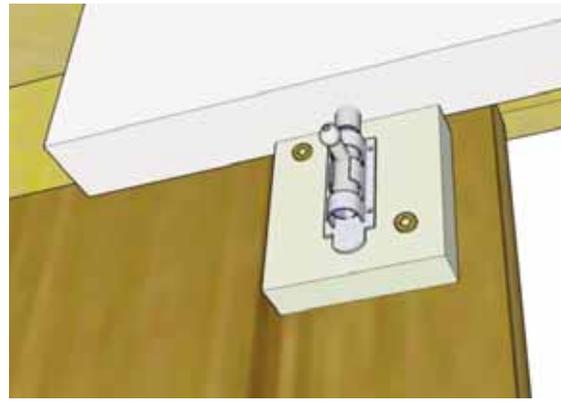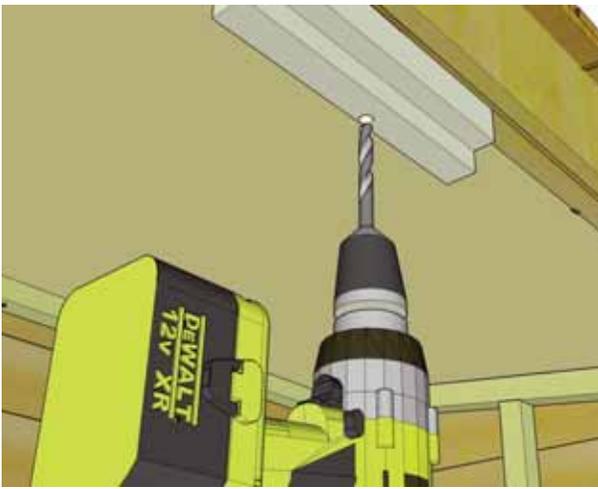

50. Open door and drill out marked barrel bolt impression with a 3/8" Drill Bit. Close door, slide barrel bolt in drilled hole to confirm fit.

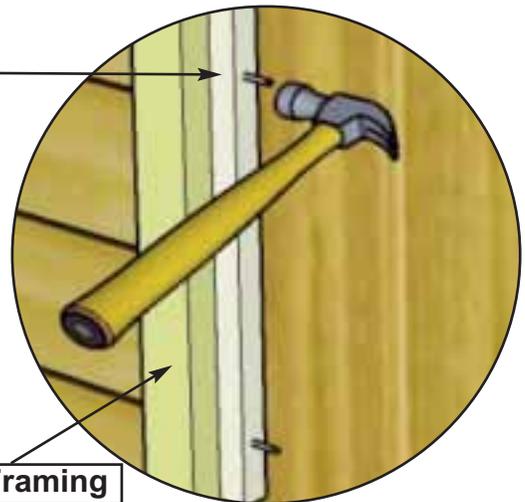

Wall Framing

51. Attach **Interior Vertical Interior Door Stops (4S) (3/4" x 3/4" x 31 5/8" x 4 pcs.)** to inside wall framing with **4 - 1 1/2" Finishing Nails (K)** per piece. To align correctly, close door to make sure stops are close to the door but don't interfere with their closing. Attach bottom piece first with hammer.



Interior Door Stops

52. Attach top stop as per **Step 51** and then complete the opposite side.



Note: Our Sheds are shipped as an unfinished product. If exposed to the elements, the lumber will weather to a silvery-gray color. If you prefer to keep the lumber looking closer to the original color, we suggest that you treat the wood with a good oil base wood stain. You may also wish to paint your new shed rather than stain it. In both cases we recommend that you consult with a paint and stain dealer in your area for their recommendations.



Congratulations on assembling your 6x3 Grand Garden Chalet!

We hope your experience constructing our **6x3 Grand Garden Chalet** has been both positive and rewarding. We value your feedback and would like to hear back from you on how well we are doing in the following areas:

- 1. Customer Service**
- 2. On Time Shipping**
- 3. Motor Freight Delivery**
- 4. Quality of Materials**
- 5. Assembly Manual**
- 6. Overall Satisfaction.**



The materials contained in this Assembly Manual may be downloaded or copied provided that ALL copies retain the copyright and any other proprietary notices contained on the materials. No material may be modified, edited or taken out of context such that its use creates a false or misleading statement or impression as to the positions, statements or actions.

Please call, write or email us at:

Canadian Address
9393 287th Street
Maple Ridge, British Columbia
Canada V2W 1L1

United States Address
P.O. Box 96
Sumas, Washington
USA 98295