


Jewenwils

Countdown Timer Outlet

[Instruction Manual]

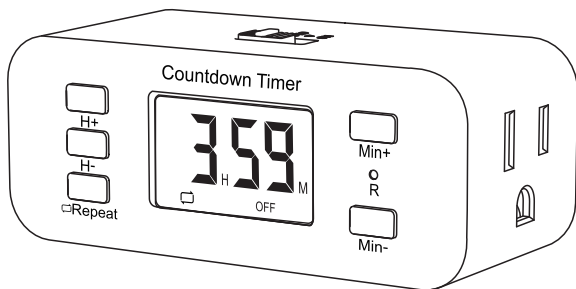


Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

WARNING:

To reduce the risk of fire, electric shock or personal injury, please strictly follow the instructions.

1. Do not connect any devices which may exceed the maximum ratings of this timer.
2. Children are not allowed to use the timer without supervision.
3. Do not disassemble or repair the product, but only by authorized service personnel.
4. Do not immerse in water.
5. Do not control appliances that contain heating elements such as cooking appliances, heaters, and irons.

Product Layout

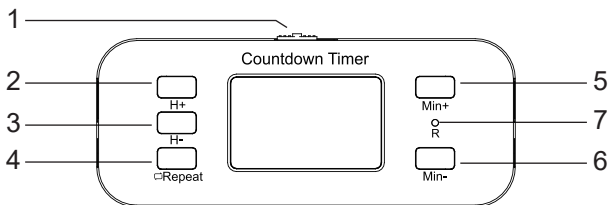

1. Top Switch: Set the countdown timer function, always ON or always OFF or Countdown control.

- ON: When the top switch is in this position, the outlet remains powered.

- OFF: When the top switch is in this position, the outlet remains off.

- CTD: When the top switch is in this position, the outlet will have power during the countdown and will have no power after the countdown ends.

2. H+: When setting the countdown duration, press this button to increase the hour duration, and long press to increase it quickly.

3. H-: When setting the countdown duration, press this button to decrease the hour duration, and long press to decrease it quickly.

4. Repeat: Enable or cancel the daily repeat of a program.

5. Min+: When setting the countdown duration, press this button to increase the minute duration, and long press to increase it quickly.

6. Min-: When setting the countdown duration, press this button to decrease the minute duration, and long press to decrease it quickly.

7. Reset: Reset all functions.

Operation Instructions

Before initial use, plug the timer in for at least 30 minutes to charge the internal battery. After the screen displays, the unit is ready for programming.

1.Set a countdown program


- Turn the top switch to CTD position.
- Press the H+, H-,Min+,Min- button to set the duration that you want.The countdown starts immediately.
- The timer will output power and cut off at the end of the countdown.
- Resetting the duration at this time will restart the countdown.

Note: The countdown duration can be set to a maximum of 35h 59min.

2.Enable the daily repeat function


After pressing the  Repeat button,  will be displayed on the screen, and the daily repeat function is turned on. Please refer to the following example to see the program running process.

Example 1 :

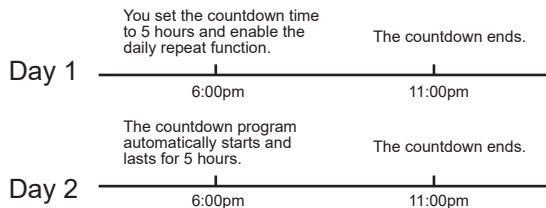

Every day thereafter will be the same as the second day unless you disable the daily repeat function.

Example 2:

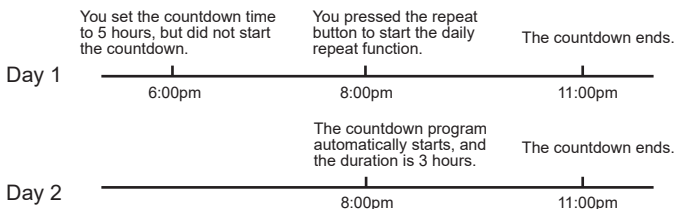

Every day thereafter will be the same as the second day unless you disable the daily repeat function.

3. Cancel the daily repeat function

- Press the  Repeat button, the  on-screen disappears, and the daily repeat function is canceled.
- Turn the top switch to the ON/OFF position, the  on-screen disappears, and the daily repeat function is canceled.

Specifications

- Input Voltage: 125VAC 60Hz
- Max Power Rating: 15A General use
15A Resistive
1000W Tungsten
500W Electronic Ballast

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China