




FLEXIBLE ALUMINUM FOIL DUCTING

SKU 1001 223 234, 591 966

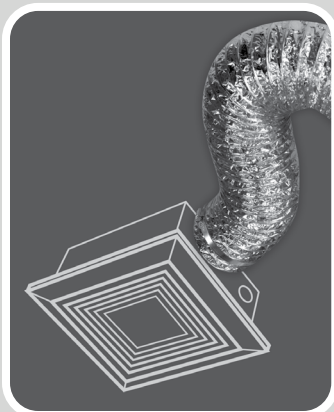

- Ideal for use in bathroom fan venting and other general purpose exhaust applications
- Made from 3 ply aluminum foil laminate
- Maximum operating temperature of 250°F
- UL / cUL 181 listed and marked as a class 1 air connector
- Tear and puncture resistant
- Will not support combustion

UL 181 Listed And Marked

Product Code	UPC Code 060672	SKU	Size	Packaging	Pack Qty.	Pack Wt. (lbs)	Pack Cube (cu. ft.)
AF325ULPHD	310463	1001 223 234	3" x 25'	Polybag / Cut Case	4	8	0.92
AF625ULPHD	310036	591 966	6" x 25'	Polybag / Cut Case	6	10	2.37

Code Compliance:

Dundas Jafine recommends that you check with the local code body, having jurisdiction in your area, to determine applicable codes. UL 181, NFPA 90A & 90B, BOCA, ICBO, SBCC, HUD/FHA MIN. Property STD.

Static Pressure - Postive: 10 in. WC

Static Pressure - Negative: 1/2 in. WC

Maximum Velocity: 5500 FPM

Temperature Range: -20°F to 250°F

Bending Radius: 1 x diameter



