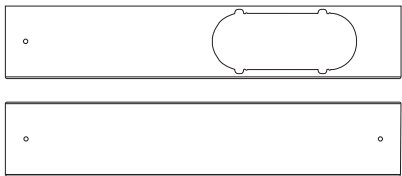





Portable Air Conditioner Window Vent Kit Installation Guide

Package Included


No.	Item	Part Name	V5513	V5515
A		Fixing Plate	1 set	1 set
B		Adjustable Plate	1 pc	1 pc
C		Exhaust Hose Adapter	1 pc (5 inch)	1 pc (6 inch)
E		Screws Kit	3 set	3 set
F		Sealing Tape	1 pc	1 pc

Installation Steps

- ① Install the screws kit **(E)** on the fixing plate **(A)**, and screw the screw cap into the screw about 50%.
(Don't over-tighten them, because you need to slide the plate freely to the correct length.)

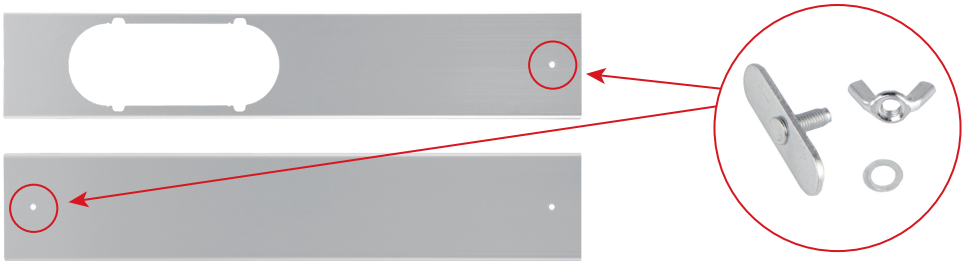

- ② Align the screw with the slot in the center of the adjustable plate **(B)**, and then push it into the track of the adjustable plate **(B)** completely.

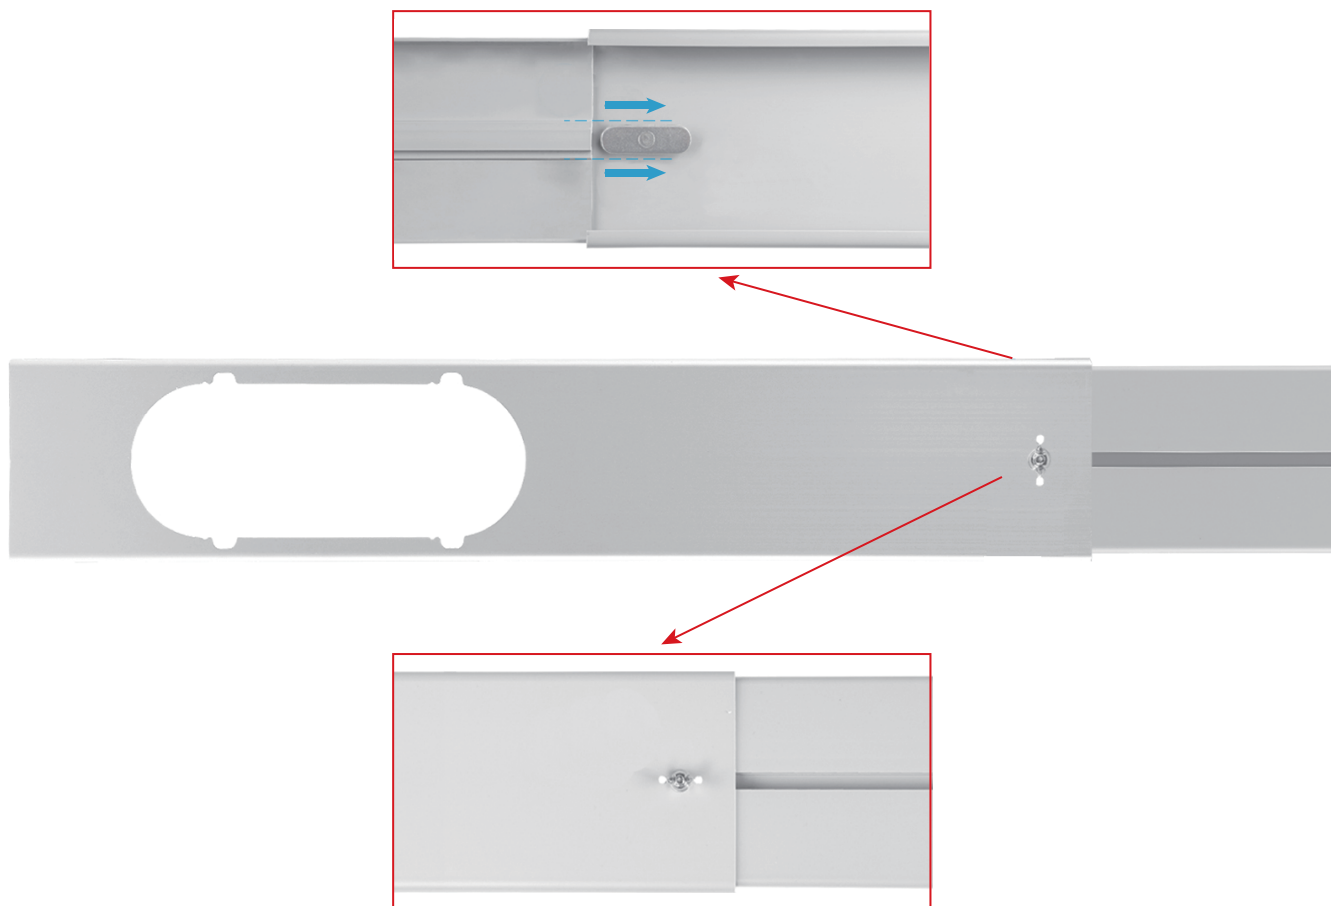

- ③ Install the exhaust hose adapter **(C)** to the fixing plate **(A)** and the hose of the portable air conditioner.



- ④ Place the plate kits **(A&B)** into the slot of your window. Adjust to a suitable length and tighten the nuts of screws kit **(E)**.



- ⑤ There is a gap between fixing plate **(A)** and adjustable plate **(B)**, because the adjustable plate is narrower than fixing plate. Post the sealing tape **(F)** at the connection between the window and the fixing plate **(A)**, which effectively isolates hot air from entering the room.



If you find any part missing or have any question about installation, please kindly contact us at support@turbro.com



© Katmai Technology Limited
www.turbro.com