

# Highline® Class Five® Toilet K-3713

#### **Features**

- Vitreous china.
- Comfort Height® Elongated bowl.
- Class Five® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 10" (254 mm) rough-in.
- Less seat and supply.
- 11-3/8" (289 mm) x 8" (203 mm) water area.
- 29-1/2" (749 mm) x 19-5/8" (498 mm) x 30-3/8" (772 mm).
- Floor mount / Floor outlet.



K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps

K-9380-L Left-hand Trip Lever

## Components

Product includes:

K-4373 Toilet Bowl

K-4436 Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





ADA CSA B651

1 OBC

# Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black Black™






# **Highline®**

Class Five® Toilet

K-3713

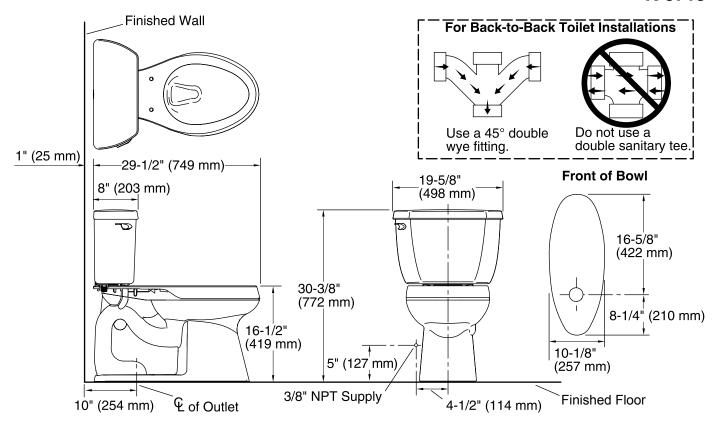

## **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Flush type: Class Five® Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water surface: 5-7/8" (149 mm)
Rough-in: 10" (254 mm)
Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

