

## Features


- Two-function pull-down sprayhead with touch-control allows you to switch from stream to Sweep® spray.
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean.
- DockNetik®, a magnetic docking system located within the spout, smoothly glides and securely locks the sprayhead into place.
- Ceramic disc valve exceeds industry longevity standards, ensuring durable performance for life.
- ProMotion™ technology's light, quiet nylon hose and ball joint makes the pull-down sprayhead easier and more comfortable to use.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch swivel spout offers superior clearance for filling pitchers and cleaning.
- Single lever handle is simple to use and makes adjusting water temperature easy.
- 1.5 gpm (gallons per minute) maximum flow rate at 60 psi.

## Material

- Premium metal construction.
- KOHLER finishes featuring ScratchShield™ technology withstand even the toughest daily use.

## Installation

- Installs with 1- or 3-hole sink (escutcheon plate included).
- Flexible supply lines and quick-connect fittings make installation easy.
- Longer shank works with countertops from 1/2" - 2-1/2" thick and is easy to install.
- Includes assembled faucet, supply lines and deck plate.

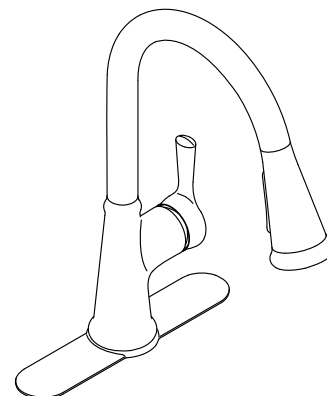

**ADA** **CSA B651**

## Codes/Standards




ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651


## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless
	2BZ	Oil-Rubbed Bronze

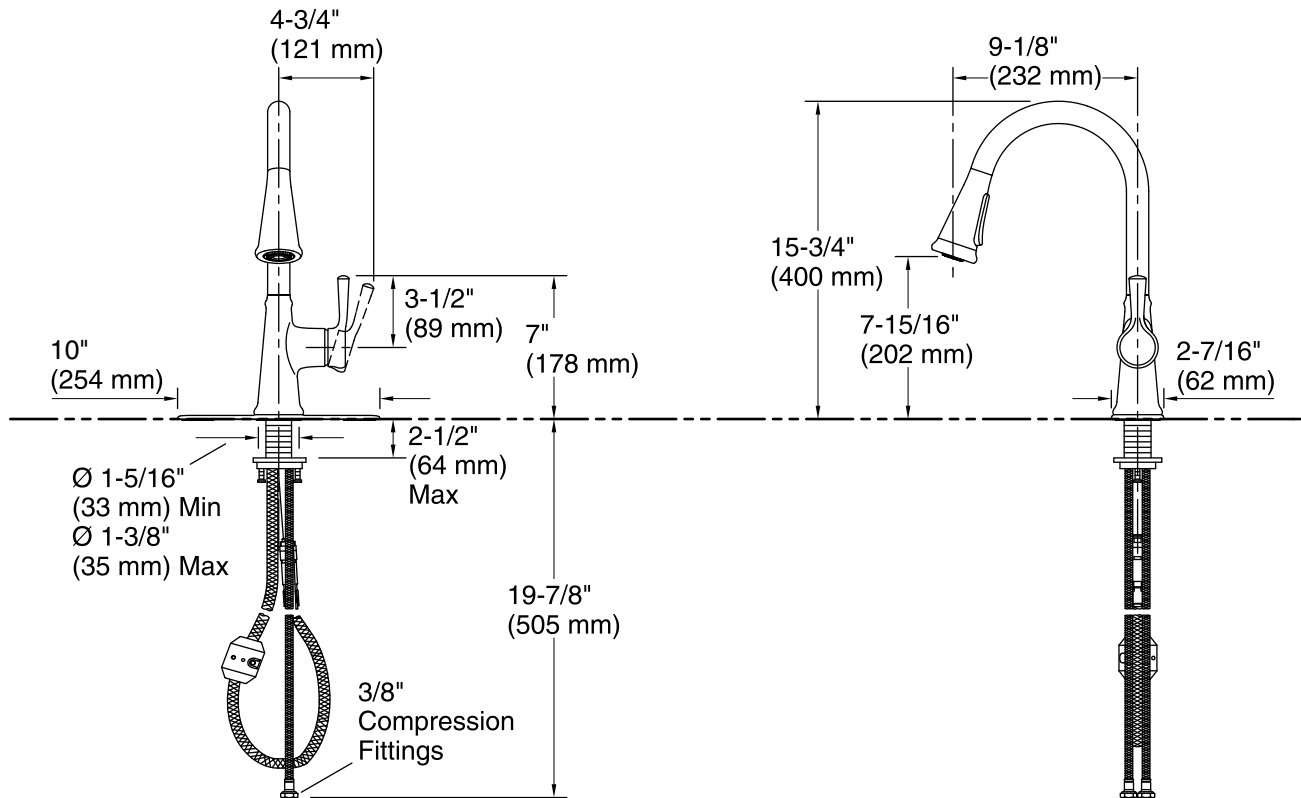

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)  
Pressure: 60 psi (4.1 bar)  
Valve body: Machined-brass

## Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.