


# stealthRO<sup>TM</sup><sub>100</sub> / stealthRO<sup>TM</sup><sub>200</sub> Membrane Flush Kit Instructions

This kit allows you to bypass the flow restrictor and "power flush" the membrane(s) to remove scale build-up and organic and inorganic contaminants from the membrane surface. By flushing the membrane(s) regularly you can help extend the life of the membrane(s). Ideally, you want to flush the membrane(s) for 3-5 minutes directly after every time you use the Reverse Osmosis unit.

## Installation Instructions:

1

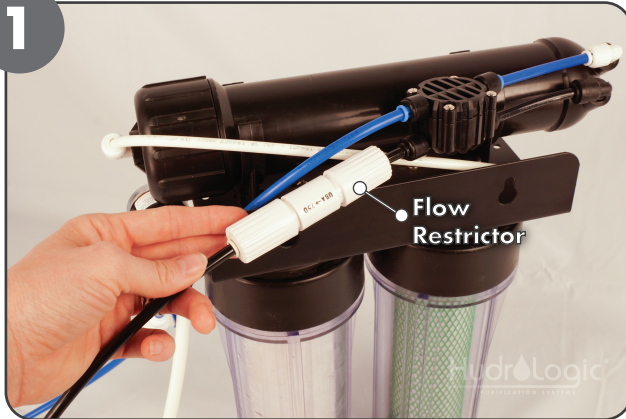

Remove flow restrictor

2



Install flow restrictor between the two short peices of blak tubing in the flush kit

3



The arrow on the flow restrictor should point the same direction as flow of water.

4



## Useful Video Links

<http://youtu.be/EhWXj6DWcH0>

Stealth RO100 and Stealth RO200 Membrane Flush Kit Instructions:

<http://youtu.be/uonUBVmW0vc>

How to Operate Quick Connect Fittings:

888-426-5644

[www.hydrologicsystems.com](http://www.hydrologicsystems.com)

[info@hydrologicsystems.com](mailto:info@hydrologicsystems.com)

To "power flush" the membrane(s) simply leave the ball valve (on the blue product line) to the open position and turn the ball valve on the black waste water line to the open position (parallel to the black waste water line). Flush membrane(s) for 2-3 minutes after each use or at least once a week. This will extend the life of your membrane(s). Once finished turn the ball valve handle on the drain line back to the position displayed in step 3 for normal operation.

**HydroLogic<sup>®</sup>**  
PURIFICATION SYSTEMS