


PRODUCT SPECIFICATIONS

# LED RECTANGLE EMERGENCY UNIT W BATTERY



**EMLEDRECT120277 SKU# 1003821752 (White)**  
**EMBLEDRECT120277 SKU# 1005190233 (Black)**

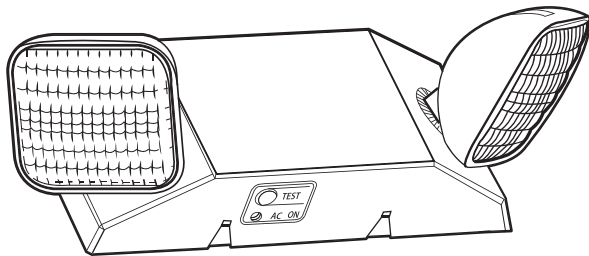

### SPECIFICATIONS

Model Number	EMLEDRECT120277/ EMBLEDRECT120277
SKU	1003821752 / 1005190233
OSMID	306606874 / 312379019
Power	3.0W
AC Voltage, Frequency	120-277V, 60 Hz
Color Temp (nom.)	4000K Emergency Heads
Operation Temp	32°F ~ 104°F
CRI	80
Lumen Output (min.)	234 lm
Max Mounting Height	27.14FT
Emergency Run Time	Min 90 min with included 6.0V Ni-Cad Batt
Efficacy	78 lm/watt

### KEY FEATURES

- Fully Adjustable Heads
- Dual Voltage 120/277 VAC, 60 Hz
- Test switch/power indicator light
- Rear Mount
- 6.0V Ni-Cad Battery with Min 90 Min Run Time
- 5 Year Warranty

### HOUSING CONSTRUCTION

- Injection molded, color stable, high impact UL 94-5VA rated polycarbonate
- Available in White or Black textured finish
- Easy mount feature for fast installation
- Universal JBOX Mounting Pattern

### RATINGS

- UL 924 Listed
- UL Damp Location Rated
- Life Safety NFPA 101
- CEC, T20, DOE Listed
- NEC/OSHA

### PACKAGING

Weight (±0.5 lb)	1.53 lbs
Size (L x W x H) (±0.1 in)*	13.5 in x 3.5 in x 8.0 in
Box Dimensions LxWxH	14.25 in x 4.75 in x 3.5 in
Gross Weight	1.96 lbs
UPC	853711008090 / 853711008274

\* Dimensions include Emergency Heads

### INCLUDED IN BOX

- Rectangle Emergency Unit (1)
- 6.0V Ni-Cad Back Up Battery (1)
- All necessary Mounting Hardware