
Assembly Instructions

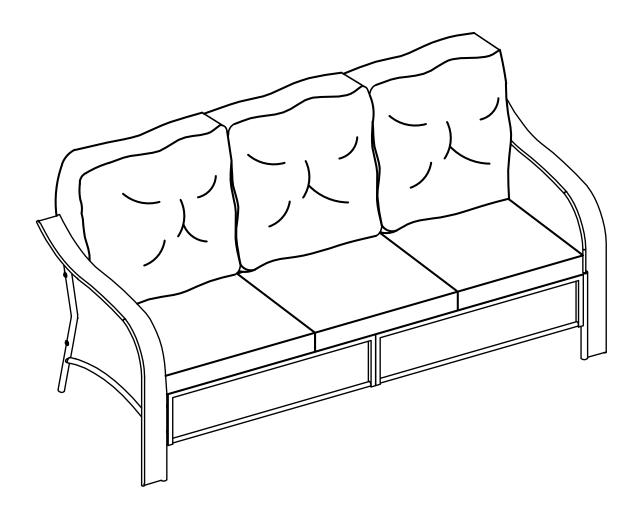


*Don't fully tighten all the bolts till the very end!

PRE-ASSEMBLY PREPARATION:


- --- Please read through the instructions before beginning assembly.
- --- Clear outthe space for assembly and lay out all ofthe parts based on the Parts List, extra room will allow you to easily determine if all the pieces are present.
- --- Keep small parts and pieces away from children until fully assembled.

	1	1		ı	T	1	<u> </u>
Part no.	Part	QTY	Image	Part no.	Part	QTY	Image
A1	Left arm	1	A	I	Bolt (M6*38mm)	20	0
A2	Right arm	1	A	J	Bolt (M6*45mm)	2	0
В	Right Back Panel	1		К	Washer	24	0
С	Left Back Panel	1		L	Allen Wrench	1	
D	Right Front Panel	1		M	Washer	1	0
E	Middle seat	1		N	Seat Cushion	3	
F	Left Front Panel	1		O	Back Cushion	3	
G	Middle Foot	1					
н	Bolt (M6*15mm)	2	0				


Step 1: Attach back panels B&C with 2pcs bolts J and 2pcs washers K,using Allen wrench L. Note:Don't fully tighten the bolts.

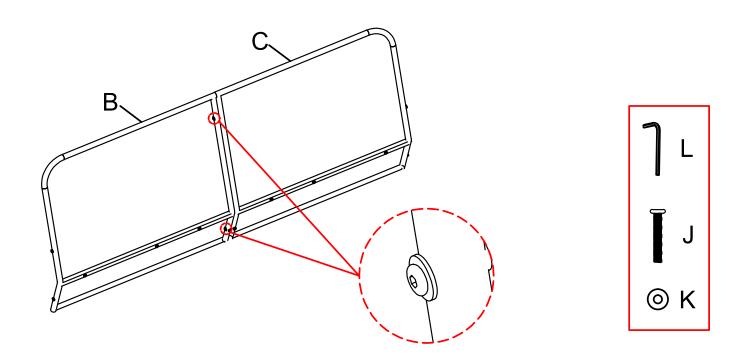


Step 2: Attach front panels F&D with 2pcs bolts I and 2pcs washers K ,using Allen wrench L . Note:Don't fully tighten the bolts.

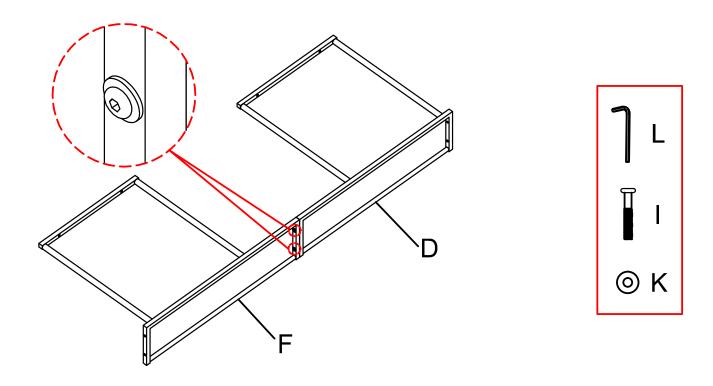


Step 3: Attach left arm A1 to back panel C with 2pcs bolts I and 2pcs washers K,using Allen wrench L. Note: Don't fully tighten the bolts.

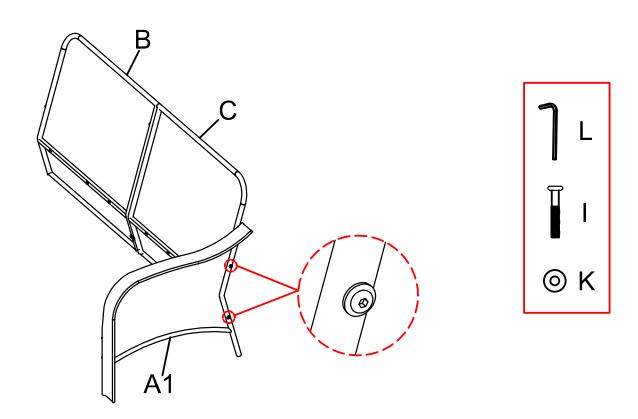


Step 4: Attach right arm A2 to back panel B with 2pcs bolts I and 2pcs washers K,using Allen wrench L .Note: Don't fully tighten the bolts.

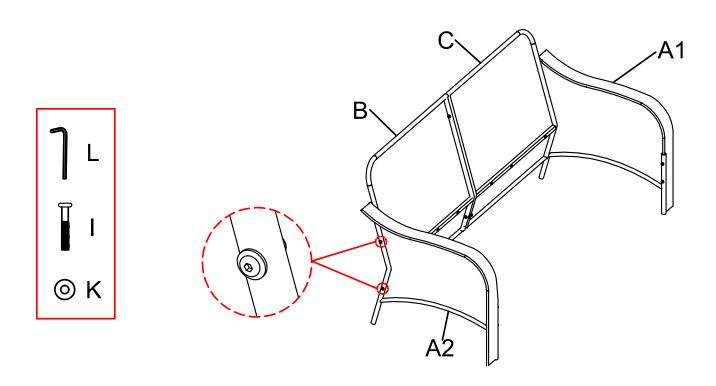


Step 5: Attach front panel D&F to arms A1&A2 with 4pcs bolts I and 4pcs washers K,using Allen wrench L. Note:Don't fully tighten the bolts.

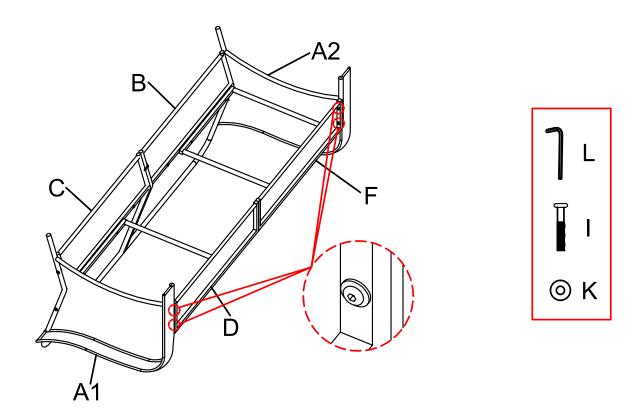


Step 6: Attach middle foot G to back panels with 2pcs bolts I ,2pcs washers K and 1pc washer M ,using Allen wrench L . Note:Don't fully tighten the bolts.

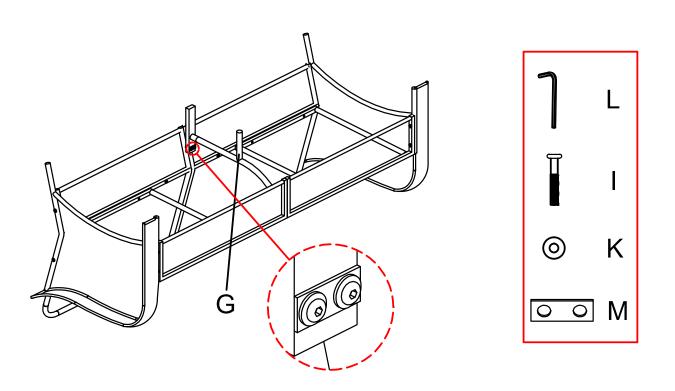


Step 7:Attach Middle foot G to Middle seat E with 2pcs bolts H and 2pcs washers K,using Allen wrench L .Note: Don't fully tighten the bolts.

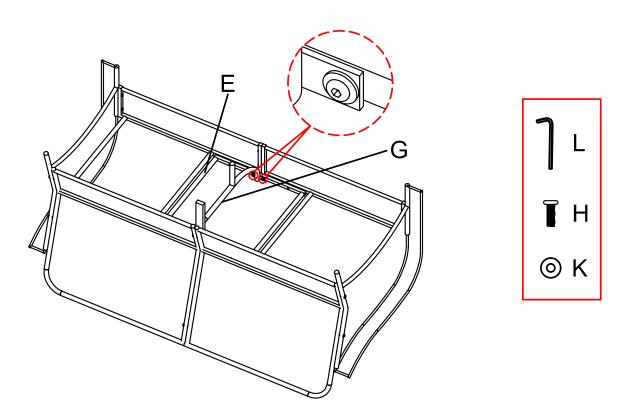

Step 8: Attach middle seat E to front panel with 2pcs bolts I and 2pcs washers K ,using Allen wrench L. Note: Don't fully tighten the bolts.

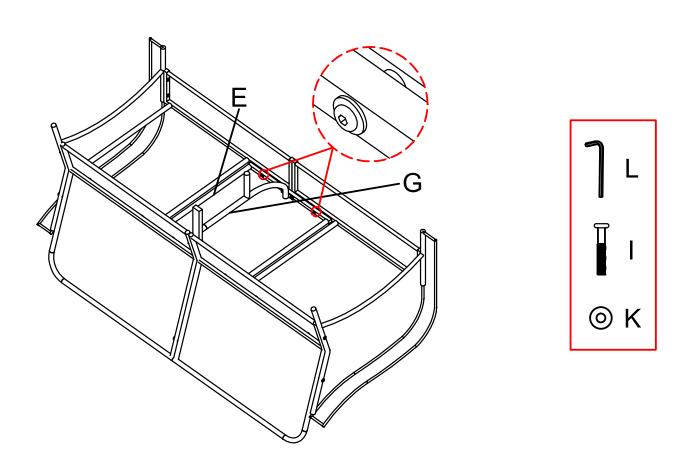

Step 9: Attach seat to back panel with 6pcs bolts I and 6pcs washers K ,using Allen wrench L. Note: Don't fully tighten the bolts.

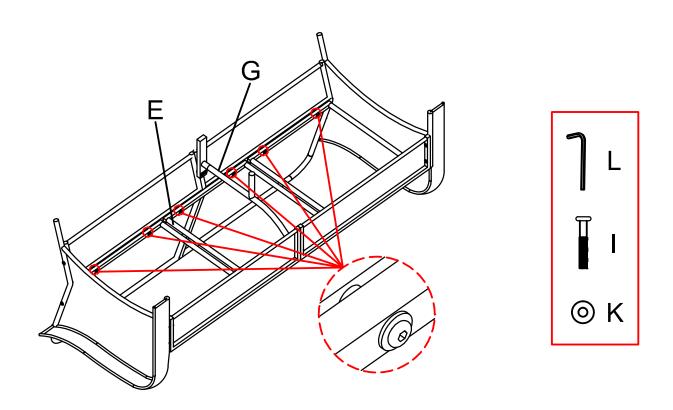

Step 10: Put seat cushion N and back cushion O onto the seat. Assembly is now complete and the product is ready for use.

