


WIRE RANGE CHART

Model: Wire Combination

WireGard™	2#22	3#22	2#20	3#20	2#18	2#16	3#16	2#14	3#14	2#12	4#14	3#12	4#12	3#10	5#12	4#10	2#6
GB-1 Gray		Min 1#20 + 1#22			Max 2#16												
GB-2 Blue		Min 3#22					Max 3#16										
GB-3 Orange				Min 3#20			Max 2#14 + 3#20										
GB-4 Yellow				Min 1#20 + 2#22								Max 3#12					
GB-6 Red								Min 2#14					Max 3#10				
Hi-Temp																	
GB-3 Black				Min 3#20			Max 2#14 + 3#20										
GB-4 Black							Min 1#14 + 1#18			Max 4#14 + 1#18							
WingGard®																	
84 Yellow	Min 2#22											Max 3#12					
GB86 Red				Min 2#20											Max 4#10		
89 Blue												Min 3#12				Max 1#6 + 2#8	
GreenGard™																	
95 Green								Min 2#14				Max 4#12					
Hex-Lox®																	
H1 Tan	Min 2#22												Max 3#10				
H2 Gray								Min 1#16 + 4#18							Max 1#6 + 1#8		
Uni-Lok®																	
G1 Yellow				Min 1#20 + 2#22								Max 3#12					
G2 Red					Min 1#18 + 2#22									Max 5#12 + 1#20			

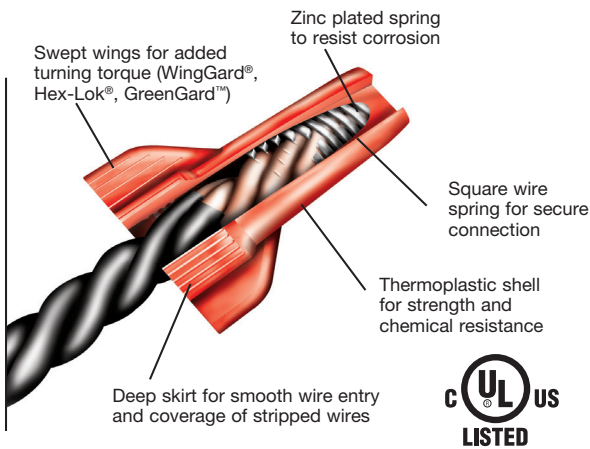

All GB® Twist-On Wire Connectors:

- Are designed to make wiring jobs fast, easy, safe and reliable.
- Provide maximum application flexibility by offering contractors myriad packaging options, ergonomic designs and wire ranges.
- Exceed UL standards for dielectric strength, wire pullout force and static heat resistance.
- Are manufactured of top-quality materials.
- Meet the requirements of nearly all budgets.
- Are continually evaluated for improvements and enhancements.