

# LED TEMPORARY LUMINAIRE




## BENEFITS

- Impact resistance
- Internal surge protection
- No filament or glass shell
- No lead
- No UV
- No radiation
- No flicker or glare




## FEATURES

- 360 degree beam angle
- Samsung LED Chips
- Up to 85% energy savings
- DLC, RoHS Compliant, IP65
- Suitable for damp locations
- 120-277 VAC
- Corrosion Resistant Cage
- 10ft Power Cord

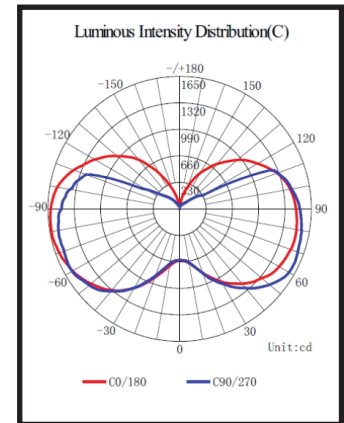

## FIXTURE DIMENSION

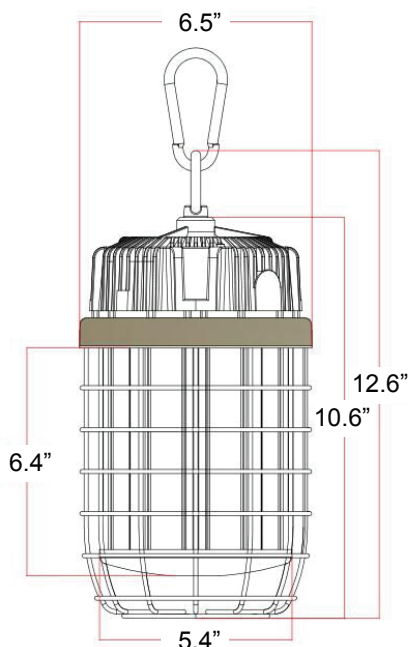

## K5-100 SPECIFICATIONS

WATT	100
LUMEN	13,000
CCT	5000-5500k
CRI	>80
POWER FACTOR	0.9
IP RATING	65
APPLICATION	Dry or Damp Locations
L70 LUMEN DEPRECIATION*	50,000hrs
EFFICACY**	120
OPERATING TEMPERATURE	-4F(-20C) to 113F(45C)
LAMP REPLACEMENT	NO
WARRANTY	50,000hrs / 5yrs
LIGHTING LOAD @ 120V/15A	10 Maximum

\* L70 - usable light level is the point at which the LED luminaire has dimmed to 70% of its original output

\*\*Luminous efficacy is the ratio of luminous flux coming out (in lumens) to electricity going out (in watts)



Bergen Industries, Inc. | P. 800.875.1846 | F. 800.875.9419 | [www.bergeninc.com](http://www.bergeninc.com)