


AbaTec™




Underlayment for Floating Vinyl Flooring 1.5 mm
100 sq.ft.

1. 3X SIMPLER TO INSTALL

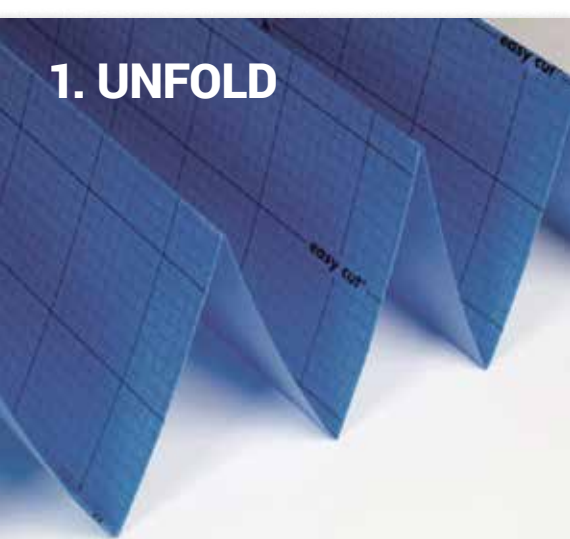


2. PROTECTS THE FLOOR


Supports the floor locking system

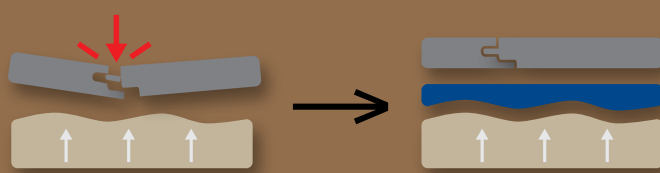

Helps smooth out minor subfloor imperfections

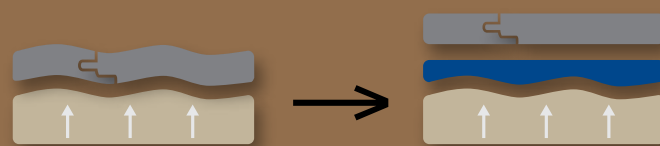

AbaTec™ surface helps prevent planks from sliding

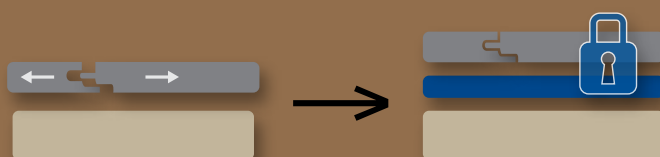


3. IMPROVES COMFORT


Reduces walking noise in room



Reduces impact sound in room below

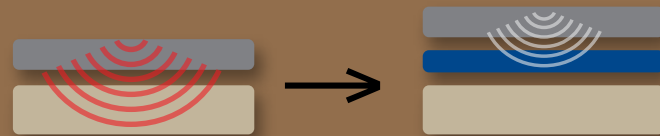

Shock-absorbing flooring structure

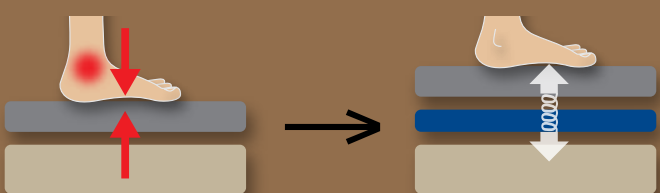

Dimensions	1,19 m x 7,83 m / 3.9 ft x 25.7 ft	Compression Strength	> 65 PSI
Moisture Protection	< 0.16 pounds / 24 hr / 1,000 sq.ft	Safety	Odorless, non-toxic
Impact Sound Insulation	IIC ~ 72 / STC ~ 66 / DELTA 26	Compatibility with underfloor heating	Yes
Thermal Insulation	R-Value 6.6 per inch	Item number	73631-US
Smoothing	1.0 mm	<i>Don't forget underlayment tape! (not included)</i>	



INSTALLATION INSTRUCTIONS:

Step 1: Ensure the floor is clean and dry before installing underlayment.

Step 2: Starting in a corner, install the first row of underlayment with moisture barrier facing upward. Install the underlayment to the wall and trim around any obstacles.

Step 3: Align the second row of underlayment to the first row ensuring there are no gaps or overlapping seams. Seal with Underlayment Tape (not included).

Step 4: Repeat this process until the entire floor is covered.

Step 5: Install the flooring per the manufacturer's instructions.

TECHNICAL SPECIFICATIONS:

Moisture Protection:	< 0.16 pounds / 24 hr / 1,000 sq.ft
Impact Sound Insulation:	IIC ~ 72 / STC ~ 66 / DELTA 26
Thermal Insulation:	R-Value 6.6 per inch
Smoothing:	1.0 mm
Compression strength CS:	> 65 PSI

PRODUCT DATA:

Thickness:	1.5 mm
Dimensions:	1.19 m x 7.83 m / 3.9 ft x 25.7 ft
Package contents:	100 sq.ft

INSTRUCCIONES DE INSTALACIÓN:

Paso 1: Asegúrese de que el piso esté limpio y seco antes de instalar el contrapiso.

Paso 2: Comenzando en una esquina, instale la primera fila de contrapiso con la barrera contra la humedad hacia arriba. Instale el contrapiso en la pared y recorte alrededor de los obstáculos.

Paso 3: Alinee la segunda fila de contrapiso con la primera fila asegurándose de que no haya espacios o costuras superpuestas. Selle con cinta de contrapiso (no incluida).

Paso 4: Repita este proceso hasta que se cubra todo el piso.

Paso 5: Instale el piso según las instrucciones del fabricante.

ESPECIFICACIONES TÉCNICAS:

Protección contra la humedad:	< 0.16 g / 24 horas / 92.9 m ²
Aislamiento de sonido de impacto:	IIC ~ 72 / STC ~ 66 / DELTA 26
Aislamiento térmico:	R-Valor 6.6 por pulgada
Suavizado	1.0 mm
Resistencia a la compresión CS:	> 65 PSI

DATOS DEL PRODUCTO:

Espesor:	1.5 mm
Dimensiones:	1.19 m x 7.83 m / 3.9 ft x 25.7 ft
Contenidos del paquete:	100 sq.ft