




R530011

Baseline Self Retracting Lifeline

FEATURES

- 11 foot working range
- 1 inch UHMWPE / polyester webbing
- Aluminum housing
- Recessed labels
- Impact indicator
- Swivel top with steel carabiner included
- Aluminum rebar hook has a gate opening of 2 ½ inches (63.5 mm)
- Steel rebar hook has a gate opening of 2 ⅞ inches (65 mm)

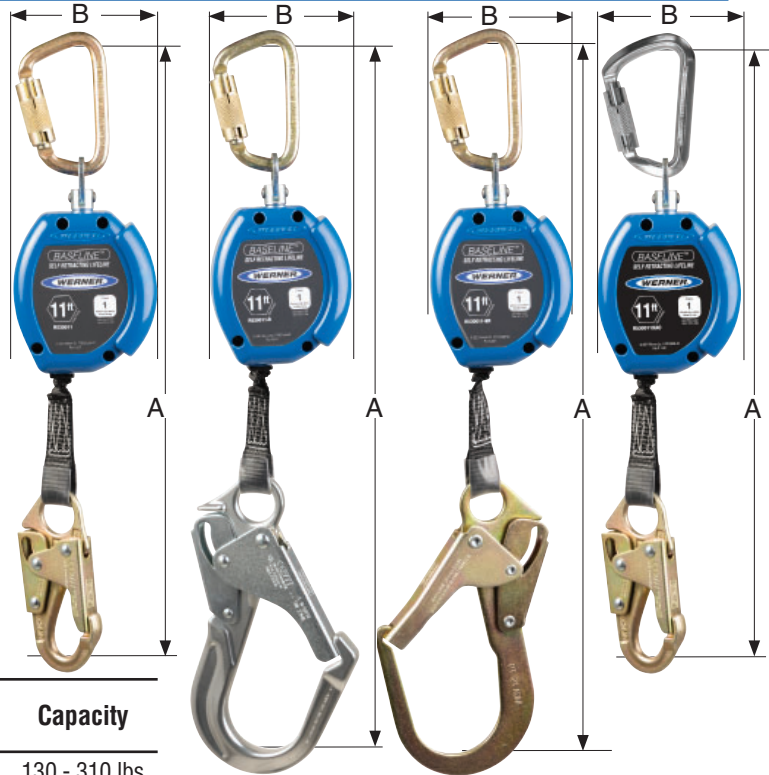

COMPLIANCE STANDARDS

Meets	Maximum Arrest Distance	Average Arrest Force	*Maximum Arrest Force	Capacity
ANSI Z359.14-2021 CLASS 1	24 in (610 mm)	900 lbf (4 kN)	1,800 lbf (8 kN)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.140 & 1926.502	24 in (610 mm)	N/A	1,800 lbf (8 kN)	400 lbs (181 kg)

*The R530011 XAC has a maximum arrest force MAF of 900 lbs and is labelled accordingly.

SPECIFICATIONS

Model No.	Lifeline Connector	Anchorage Connector	(A)	(B)	Depth	Aprox. Weight
R530011	Steel Snap Hook	Steel Carabiner	19 ½ in (495 mm)	4 ⅓ in (109 mm)	3 ⅓ in (81 mm)	4.26 lb (1.9 kg)
R530011-R	Aluminum Rebar Hook	Steel Carabiner	23 in (585 mm)	4 ⅓ in (109 mm)	3 ⅓ in (81 mm)	4.82 lbs (2.1 kg)
R530011-SR	Steel Rebar Hook	Steel Carabiner	23 in (585 mm)	4 ⅓ in (109 mm)	3 ⅓ in (81 mm)	4.93 lbs (2.2 kg)
R530011XAC	Steel Snap Hook	Aluminum Carabiner	20 ⅓ in (518 mm)	4 ⅓ in (109 mm)	3 ⅓ in (81 mm)	3.84 lbs (1.7 kg)

*See User Instructions for more information.

⚠ WARNING: Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet