

# MOISTURE BARRICADE 6-MIL POLYETHYLENE FILM

For use with vinyl, laminate, SPC and engineered wood flooring

70-115  
70-116  
70-117  
70-118

### ADHESIVE STRIP


Seals out moisture at the seams to protect floors

### PROTECTIVE

Class 1 moisture barrier prevents subfloor moisture from reaching the finished floor

### COVERAGE

Roll unfolds to cover an extra large area. See below for individual roll dimensions

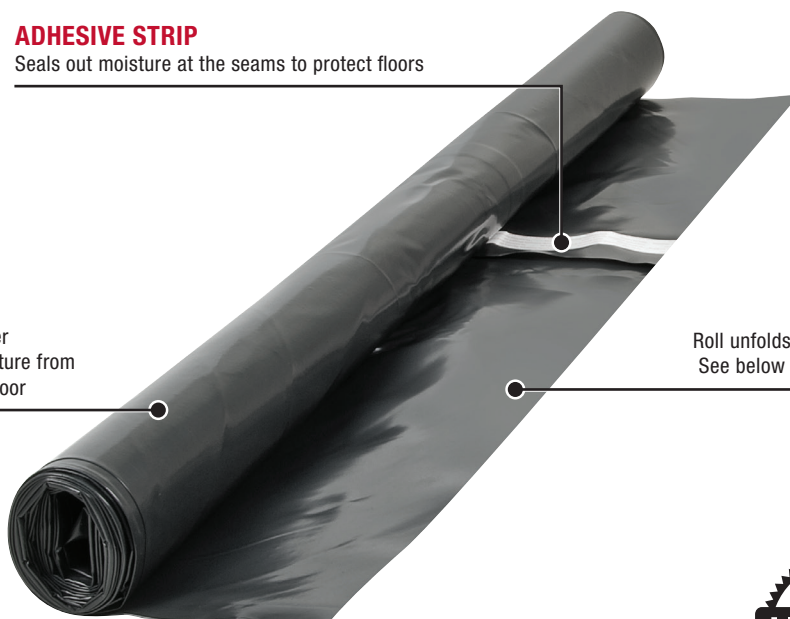

EASE OF  
INSTALLATION



MOLD & MILDEW  
DEFENSE



made in  
**USA**

### SPECIFICATIONS

ITEM #	70-115	70-116	70-117	70-118
UNIT OF MEASURE	12 rolls per case	6 rolls per case	1 roll per case	1 roll per case
COVERAGE	120 sq. ft / roll 1140 sq. ft / per case	300 sq. ft. / roll 1800 sq. ft / per case	600 sq. ft / roll	1000 sq. ft / roll
WIDTH OF ROLL	10 ft. (120")	12 ft. (144")	12 ft. (144")	12 ft. (144")
LENGTH OF ROLL	12 ft. (144")	25 ft. (300")	50 ft. (600")	83.5 ft. (1,002")
THICKNESS	6 mil	6 mil	6 mil	6 mil
WEIGHT PER ROLL	2.7 lbs.	7.8 lbs.	15 lbs.	23lbs.
DIAMETER OF ROLL	2-1/4"	3-3/4"	4-1/2"	6-1/2"

Scan here for  
PRODUCT  
INFORMATION



ROBERTS® Moisture Barricade is designed for use with vinyl, laminate, SPC and engineered wood flooring to protect finished floors against moisture damage. Recommended by the National Wood Flooring Association (NWFA), this 6-mil thick polyethylene film is a Class-1 moisture barrier over concrete subfloors that protects and extends the life of your floors. Can also be used with standard underlaments as an additional layer of moisture protection.