



GUARDRAILS SYSTEM

MODEL : I-CISGR

OPERATIONAL SAFETY AND ASSEMBLY INSTRUCTIONS



Picture may differ from actual product



Customer Service: 1 800 363-7587

Our customer service staff is available to help you. For help with product assembly, to report damaged or missing parts, or for any other information about this product, please call our toll-free number.

KEEP THIS MANUAL FOR FUTURE REFERENCE

Keep this manual and the original sales invoice in a safe, dry place for future reference.

Two-Year Limited Warranty

Metaltech-Omega Inc. guarantees this product against any material defect. Please return this product, freight prepaid, to Metaltech-Omega Inc. At its own discretion, Metaltech-Omega Inc. will replace or repair this product and return it within a reasonable time. This warranty does not cover any damage(s) caused by any incorrect or inappropriate use, care or maintenance. Proof of purchase must accompany the return.



WWW.METALTECH.INFO
1 800 363-7587
LAVAL, QUEBEC, CANADA H7L 3N6



Metaltech is a registered trademark of Metaltech-Omega inc.
DESIGNED IN CANADA / MADE IN CHINA

INCISGR-NA-ENG06



READ THESE INSTRUCTIONS CAREFULLY BEFORE USING THIS PRODUCT.
KEEP THIS MANUAL HANDY FOR FUTURE REFERENCE.

2 YEAR
WARRANTY

OSHA
MEETS 29 CFR Pt. 1926

ANSI
MEETS CODE A10.8

CSA
MEETS CSA STANDARD

OPERATIONAL SAFETY



READ BEFORE BEGINNING ASSEMBLY.

FAILURE TO UNDERSTAND AND FOLLOW ALL SAFETY RULES AND ASSEMBLY INSTRUCTIONS
COULD RESULT IN SERIOUS INJURY OR DEATH.

USER ASSUMES RISK OF PERSONAL INJURY BY FAILURE TO READ AND FOLLOW
MANUFACTURER’S SAFETY RULES AND ASSEMBLY INSTRUCTIONS, AND BY FAILURE TO
OBSERVE FEDERAL, PROVINCIAL/STATE AND MUNICIPAL CODES.



METAL CONDUCTS ELECTRICITY:

Do not use this equipment where contact may be made with power lines or other live electrical circuits.




OPERATION AND SAFETY

- Always use this scaffold in conformity with local or national legislation which applies.
- Never stack more than two units.
- Always use outriggers and guardrails when stacking units.
- Inspect before use. Do not use scaffold if damaged or parts are missing.
- Examine thoroughly to make sure unit is properly set up.
- Guardrails must be installed on all open sides of a work platform where a person could fall from a height of 6 ft (1.8 m) or more.
- Always fasten the guardrails system to the structure using locking pins or bolts.
- Guardrails must be installed so that access door swings inward over platform.
- Always lock all access doors using door latches, even if the scaffold is in use or not.
- Securely lock all braces and platform before each use.
- There must be a minimum of two side braces installed on each scaffold level and evenly spaced throughout the scaffold. Lack of adequate bracing could cause scaffold to collapse.
- Always use outriggers secured to the structure with the locking pins.
- Always use casters locked to the structure with the locking pins.
- Do not climb unless all casters are in locked position.
- Erect to be plumb on firm and level surface.
- This scaffold must be used on a firm surface that is free of pits, debris, holes or obstructions.
- Never place anything under or attach anything to this scaffold to increase height or to adjust to uneven surfaces.
- Acids are corrosive and can seriously affect strength. Do not expose this scaffold to corrosive substances.
- Keep scaffold free of debris and unnecessary equipment.
- Always keep body centered inside structure of scaffold.
- Remove or fasten all tools, material or equipment before moving. Use extra caution when moving to avoid tipping.
- Never try moving this scaffold while standing on it.
- Never move a scaffold with a worker within.
- Do not use powered devices to propel this scaffold. Use extra caution near operating machinery.
- Do not use if the surface is not firm and level.
- Do not use in inclement weather or high winds.
- Maintain a firm grip while climbing.
- Do not modify the scaffold or any of its components.
- Do not use the scaffold as a footbridge.

ASSEMBLY INSTRUCTIONS

NOTE

Two types of fastener device can be supplied with this product:




Lock pin



Bolt with nut

- Erect the scaffold (one or two frames high) by following the manufacturer instructions.
- Install the first guardrail panel by inserting two corner pegs into sockets in scaffold sides braces and secure with lock pins or bolts supplied. Verify that the guardrail is firmly fastened to the platform and it cannot be lifted.

Repeat with the second guardrail panel.
- Verify that the access doors swings inward over platform. Lock the access doors with the door latch.

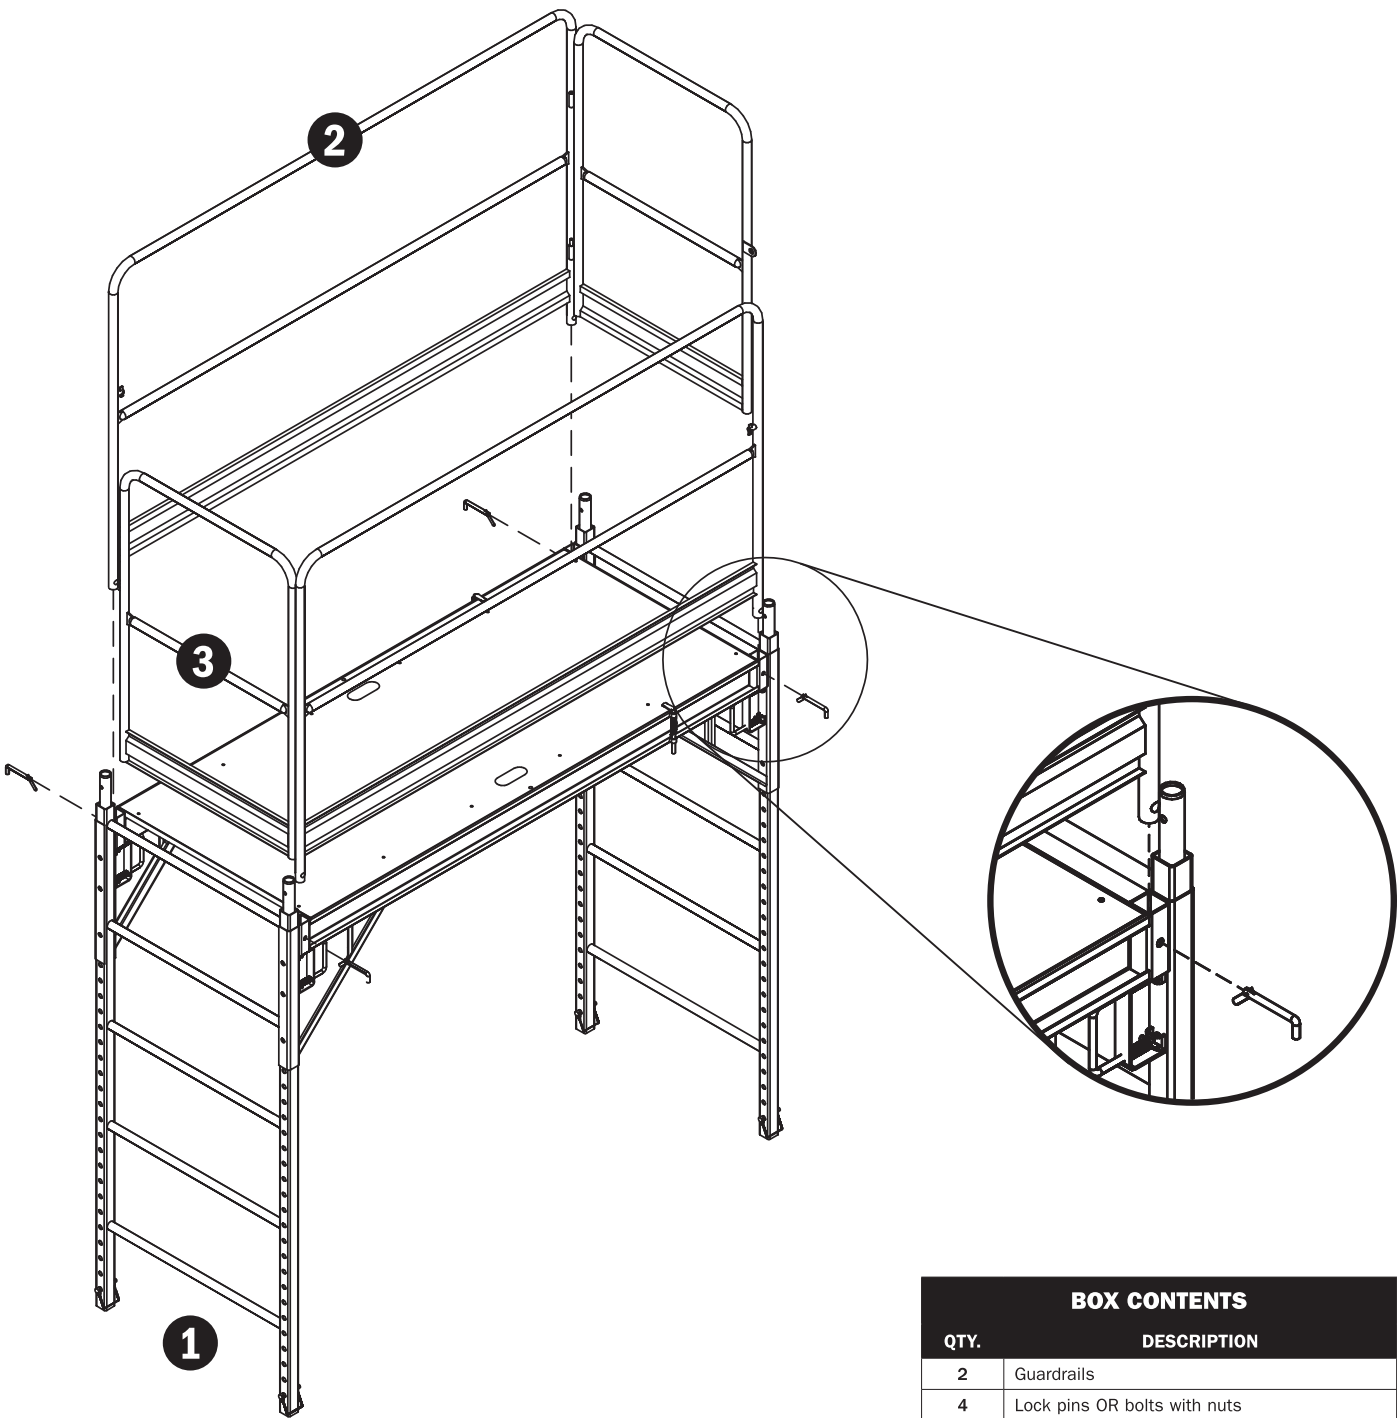

BOX CONTENTS

QTY.	DESCRIPTION
2	Guardrails
4	Lock pins OR bolts with nuts