


Ceiling Fan Down Rod Replacement (1/2" Standard, 0.875" Actual Outer Diameter)

Congratulations on the purchase of your River of Goods, Ceiling Fan Down Rod! We're honored to be a part of your home. Before we get started with the installation of your new purchase, please note:

 **WARNING: TO AVOID PERSONAL INJURY, PLEASE CONSULT A PROFESSIONAL ELECTRICIAN IF ANY WIRES NEED TO BE ADDED AND SPLICED WITH THE EXISTING CEILING FAN WIRING**


Let's begin! To install your new down rod, please proceed with the following steps:

- 1) Dismount the canopy ball from the original down rod by loosening the lock screw(s) and removing the safety pin (Note: Upon loosening of the lock screw(s), allow the canopy ball to slide down in order to gain access to the safety pin).

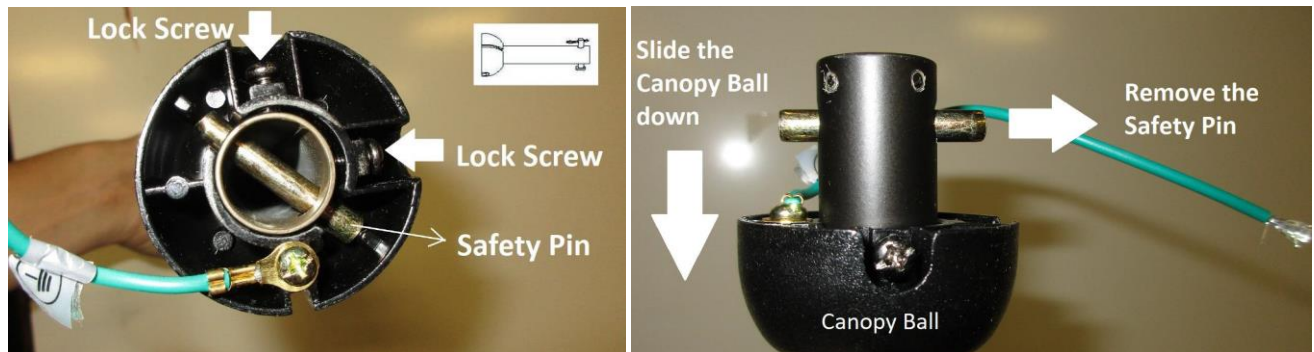

- 2) With the lock screws loosened and the safety pin removed, gently remove the canopy ball from the original down rod
- 3) Insert the safety pin on your new **River of Goods down rod**, and simply slide the canopy ball into place, ensuring that the safety pin is safely and securely nested into place.
- 4) Once the canopy ball is securely fastened around the safety pin, tighten the lock screws to hold the canopy ball securely in place.
- 5) **Ensure the safety pin and canopy ball are securely connected, and no movement of the canopy ball or safety pin is present!**
- 6) Your River of Goods down rod is now assembled ready for installation!

Note: River of Goods down rods are compatible with ceiling fans containing a 1/2" standard, pin installation-type rod. Please check your existing ceiling fan down rod type to ensure proper fit and function!

 **WARNING: TO AVOID PERSONAL INJURY, PLEASE CONSULT A PROFESSIONAL ELECTRICIAN IF ANY WIRES NEED TO BE ADDED AND SPLICED WITH THE EXISTING CEILING FAN WIRING**