



Measurement guide LST

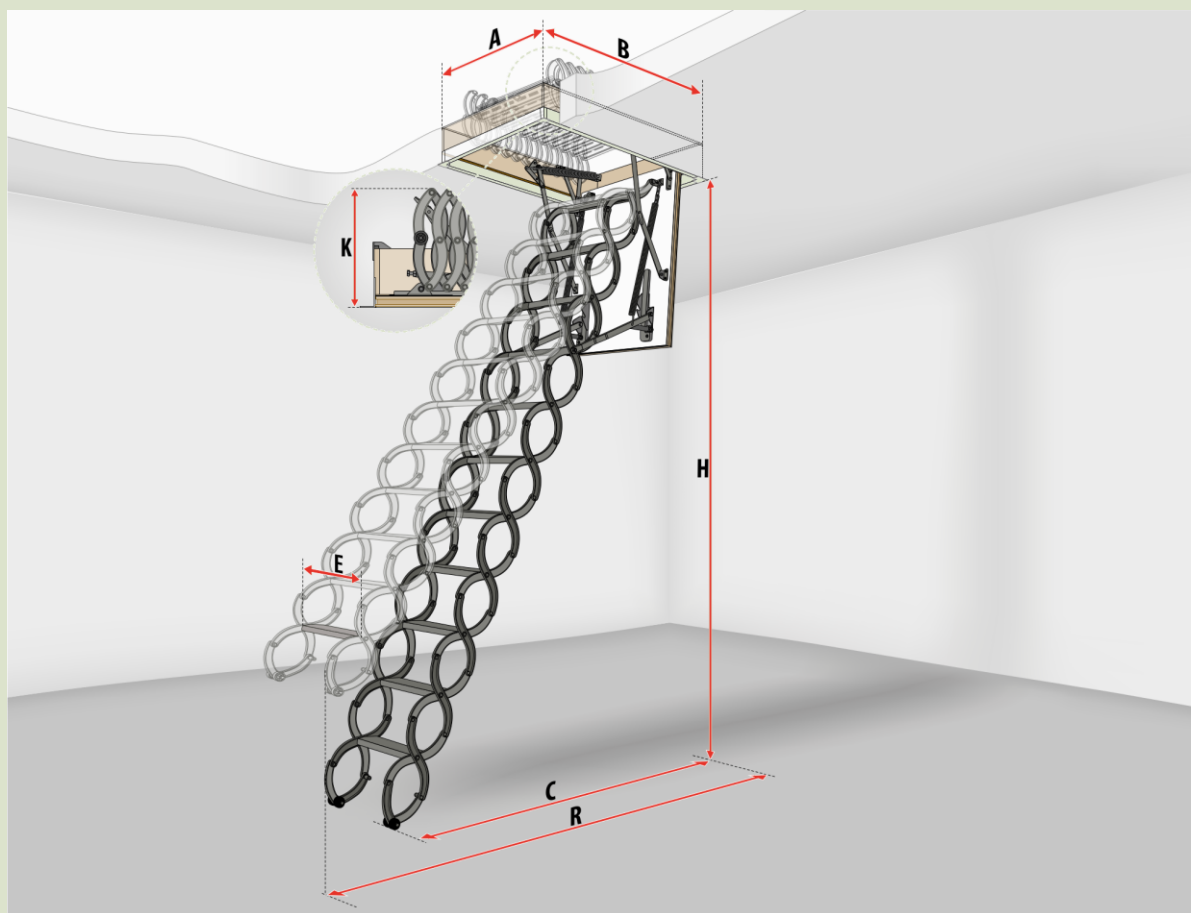

ATTIC LADDER DIMENSIONS

									1 step removed	1 additional step	2 additional steps			
LST		22½x31½	27½x31½	22½x47	25x47	22½x54	25x54	30 ½ x 54						
Manufacturer's part number		66875	66876	66820	66821	66822	66823	66877						
Ceiling height	H	8'2⅝" – 9'2¼"							7'6½"	8'2⅝"	9'2¼"	9'10⅝"	9'10⅝"	10'10"
Rough opening	AxB	22½"x31½"	27½"x31½"	22½"x47"	25"x47"	22½"x54"	25"x54"	30 ½"x54"	Ladder dimensions are given in the chart on the left.					
Outside frame dimensions		22"x31¼"	27"x31¼"	22"x46⅝"	24½"x46⅝"	22"x53¾"	24½"x53¾"	30"x53¾"						
Outside frame dimensions including trim		24⅜"x33¼"	29⅞"x33¼"	24⅜"x49"	26¾"x49"	24⅜"x55¾"	26¾"x55¾"	31⅞"x55 ¾"						
Inside frame dimensions		20½"x29¼"	25⅞"x29¼"	20½"x44¾"	22⅞"x44¾"	20½"x51⅞"	22⅞"x51¾"	28"x51 ¾"						
Projection	R	59"							55⅞"	63"	67"			
Landing space	C	57½" – 52¾"							53⅞"	51⅞"	59"	57⅞"	63"	59"
Folded ladder height	K	15"												
Frame height		7⅞"												
Approx. Weight (lbs)		84	92	88	93	97	99	110						
Step width	E	11⅞"	15"	11⅞"				15"	maximum loading: 350 lbs R-value: 5.2 insulation thickness: 1 ⅞" hatch thickness: 1 ⅜"					
Step depth		3⅞"												
Possibility of adding additional steps		LSS-31	LSS-38	LSS-31				LSS-38						

Max Clearance LST

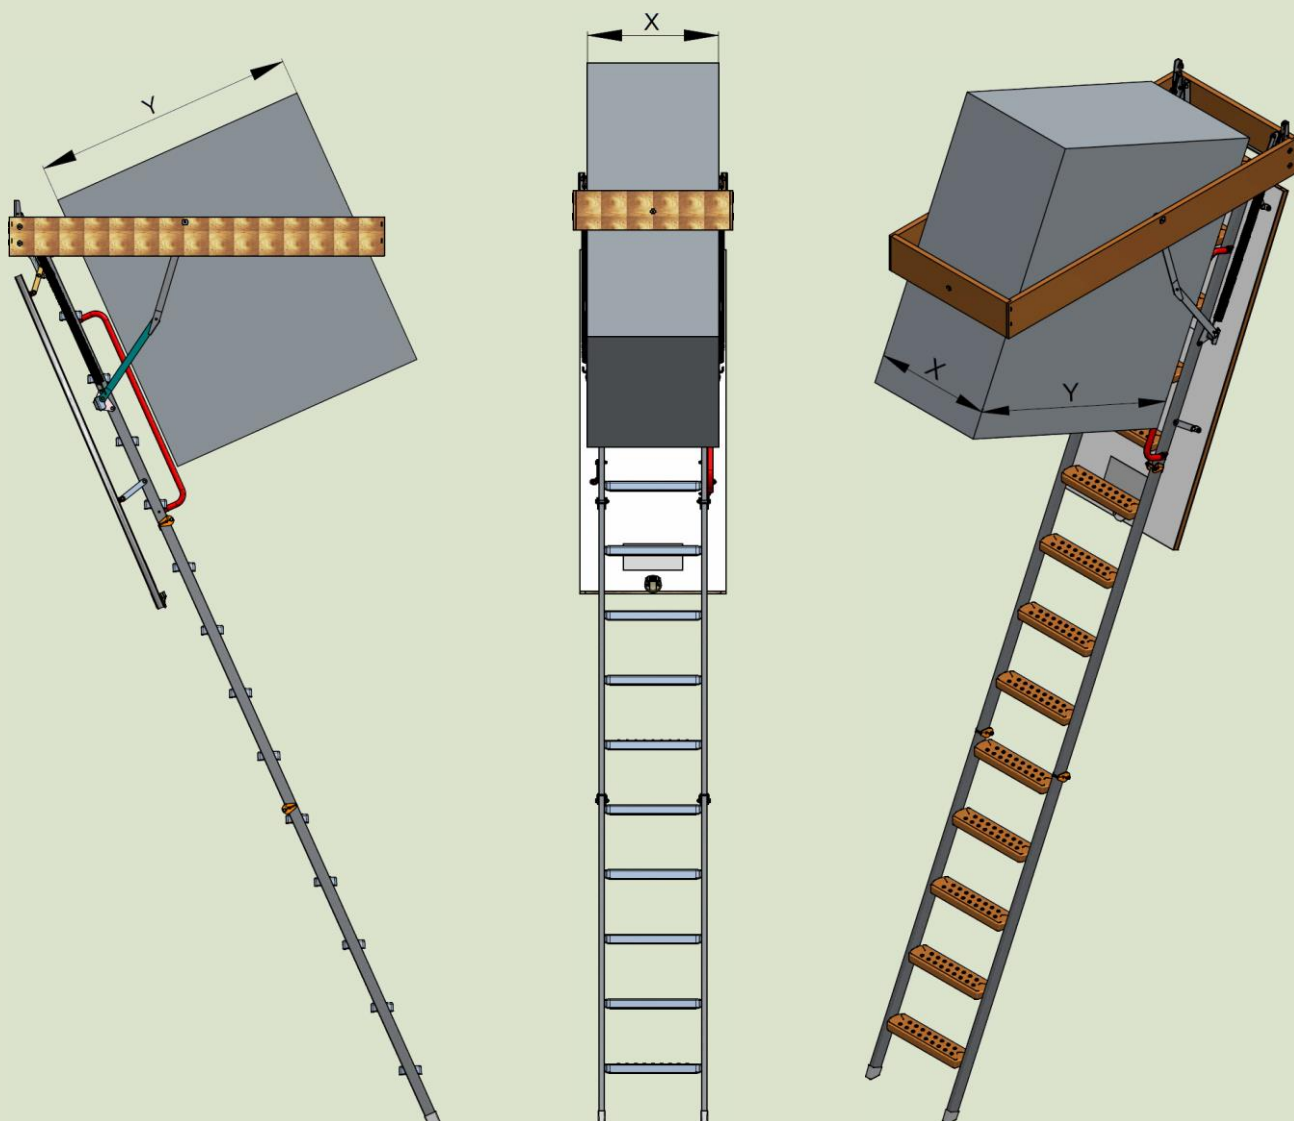

Size	Clearance Width X	Clearance Length Y
22½" x 31½"	15¼"	14⅞"
27½" x 31½"	20"	14⅞"
22½" x 47"	15¼"	29¼"
25" x 47"	17⅝"	29¼"
22½" x 54"	15¼"	35¾"
25" x 54"	17⅝"	35¾"
30" x 54"	22¾"	35¾"



FAKRO AMERICA LLC
 39 West Factory Road
 Addison, IL 60101
 tel: (630) 543-1010
 fax: (630) 543-1011
www.fakrousa.com
 e-mail: sales@fakrousa.com