



NITELIGHTER®

Motion-Activated Solar Powered LED Spotlight with Light Sensor

Model: NLS650M

IMPORTANT: Keep this manual for future reference.

IMPORTANT SAFETY INSTRUCTIONS

READ AND FOLLOW ALL INSTRUCTIONS


- ⚠ Do not allow children to install or operate the light.
- ⚠ Do not install the light in poor weather conditions, especially when lightning is present.
- ⚠ Ensure the area where the light is being attached is free from wires, plumbing or other obstructions.
- ⚠ If using a ladder, ensure the footing is secure before climbing and obtain assistance when needed.
- ⚠ Wear protective equipment such as safety glasses, dust masks and gloves when installing the light.
- ⚠ Ensure the area where the light is being installed is structurally sound and will support the light.
- ⚠ Do not hang anything from the light.
- ⚠ Clear any snow or other objects from resting on top of the light.

Installation


IMPORTANT: Ensure that the location of where the light will be installed allows for adequate sunlight throughout the day to charge the battery sufficiently. Be mindful of overhangs or shaded areas.

1. Unfold the light and remove any packaging.
2. Remove the mounting plate from the solar panel by pulling down on the plate and up on the light/panel.
3. Place the plate in the desired area, ensure the plate is level and mark the hole locations.
4. Pre-drill the marked holes with an appropriate sized drill bit (mounting surface will determine the drill bit required).

NOTE: The surface on which the light is being mounted will determine the type of installation required. Masonry surfaces such as brick or concrete will require the use of a masonry bit and plastic anchors/screws. Installation into a wooden surface or some engineered surfaces may only require the use of the provided screws. Longer screws may be required depending on the installation.

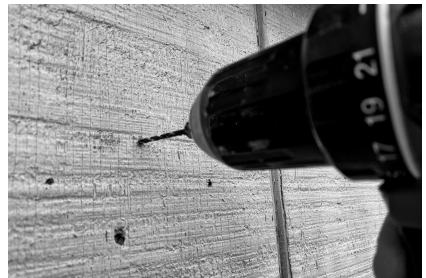


- Once the holes are predrilled, realign the mounting plate and secure with screws.

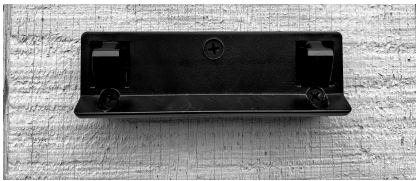

- Slide the light/solar panel over the mounting plate to secure in place.



- Adjust the lamps of the light to cover the desired area. Tighten the screws using a Phillips-head screwdriver on each lamp to hold the desired angle/position of the lamps.

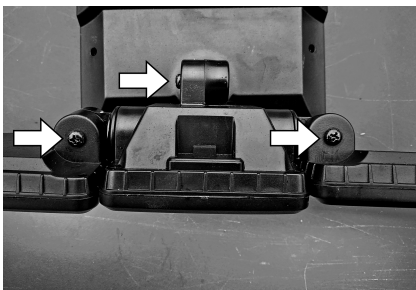


NOTE: The light can be removed from the mounting plate to make tightening of the bolts easier.



Operating the Light

- Slide the switch of the light to the ON position. The light will flash indicating it is on.
- Allow the light to charge during the day.
- After dark, walk past the light to have it illuminate.
- Finalize the position of the lamps if necessary.
- The light will turn off after 30 seconds of not detecting movement.
- The light can be turned off manually by placing the switch in the OFF position.

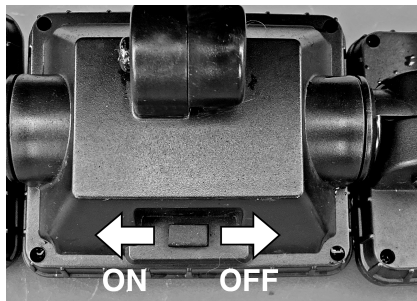

Warranty

SPQ warrants the light to be free from manufacturer defects. Inspect thoroughly before installation and install the light with care. Defects that occur due to improper installation, environmental conditions, Acts of God or improper handling is not covered by this warranty. Any modifications to the light will void the warranty. This warranty is only valid within the Continental US and Canada.

This limited warranty is provided only to the original owner from the date of purchase for a length of 1 year. This warranty is nontransferable and requires a copy of the receipt showing the date of purchase at the time the claim is filed.

This warranty is the only warranty provided to the end use, no other warranties provided by the seller of the product will be honored by SPQ Brands. SPQ Brands will replace or repair the product with new or refurbished items at their discretion. SPQ Brands' maximum liability is limited to the purchased price of the product. SPQ Brands will not be liable for any damage to person or property of any nature resulting from the sale, installation or use of this product.

Contact SPQ Brands for additional assistance: 609-212-0221, M-F, 9am - 5pm, EST.