





DOTFLOOR

@BENCHEWICK

SPC Catalog

2024

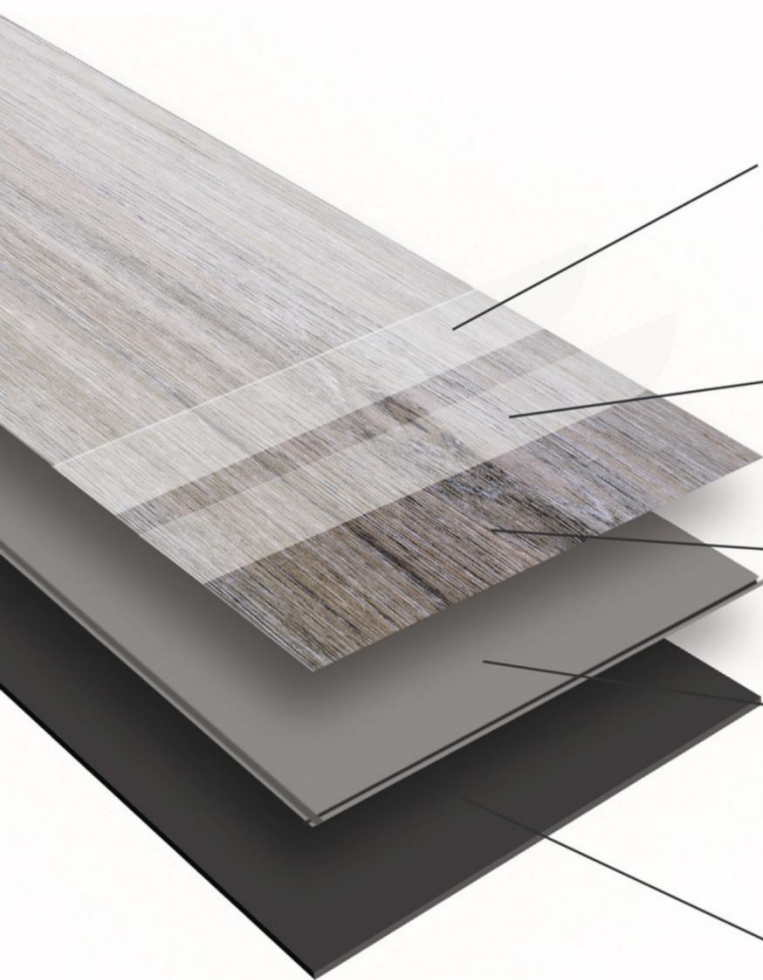

Microscopic ceramic particles, suspended in a UV cured urethane coating for superior wear & stain resistance and easy maintenance

Wear Layer

- Protects against excessive wear
- Provides superior durability
- Provides superior stain resistance
- Commercial traffic rated

High Def Printed Film

- High definition printed film, deliver the beauty and realism of natural wood

Rigid Core

- Pure SPC Rigid Core technology
- Rigid water-proof core
- Stable and will not expand or contract
- Glueless locking system

Mute Step Underlayment

- Optimal underlayment
- Provides shock absorption
- Provides sound insulation
- Absorbs subfloor imperfections

FEATURES & BENEFITS



Ultra-Stable

Quality-engineered multi-ply construction holds shape, resists cupping and peaking over time



Waterproof

Top layer and core are impervious to water, preventing damage from spills and everyday mishaps. Great for basements, kitchens and bathroom.



Dent resistant

High-density core and top layer provide stays beautiful assurance for years.



EASY INSTALL

Easy to install

Installations is fast and easy with Valinge click system. Idea for overnight installation without business disruption



Easy to maintain

Spills and messes are easily wiped up with a damp mop
Highly stain resistant



Gap resistant

Super-tight, patented Valinge joints prevent ugly gaps and keep floors resistant to surface water



Superfine Anti-slip class

Safety is one of our major concerns that making flooring. As a result of specially developed structures with anti-slip class rating. The SPC flooring performs very well to prevent skidding in humid area.



Peace-of-Mind durability

A beautiful floor that stands up to life and everyday mishaps Great for basements kitchens and bathrooms.



Clean and healthy

Dotfloor is high quality lome stone power & PVC resin, without harmromadeful materials such as benzene, formaldehyde, heavy metal. The final products passed the test from more than 179 different types of hazardous materials, chemicals etc.



Pet Friendly

Proven in testing for pet urine(matched fluid, low acidity /PH 4-5) Dotfloor shows no visible signs of surface staining per strict ASTM F925 standard.

SPC402

ALL-IN-STOCK

WWW.BENCHWICK.COM

WRAP UP IN COMFORT, UNWRAP YOUR STYLE



TB1141 HARD MAPLE



TB1629 GOLDEN OAK



TB1634 Red Oak



TB1635 Yellow Pine



TB1636 White Oak



TB1637 Smoke Tree



TB1638 Coffee Brown



TB1639 White Birch



TB166 Green Ash



TB772 London Plane



TB978 CREAM TEAK



TB984 SMOKED HICKORY

SPC402

ALL-IN-STOCK

WRAP UP IN COMFORT, UNWRAP YOUR STYLE



TB161 Capital Medium



TB927 Lava Lake



TB1631 Colorado Spring



TB651 Grand Goldin



TB932 Sunny Oak

SPC 402

SPECIFICATIONS

CLASSIFICATION: SPC RIGID CORE

SIZE: 7.17" X 48" X 5 MM

SPC CORE STANDARD DIMENSIONS: 4MM

COMMERCIAL WEAR LAYER: 12MIL

FINISH AND STRUCTURE: EMBOSSING

STANDARD BACKINGS: IXPE FOAM 1 MM

EDGE: MICRO BEVEL

COLORS: 12 UNIQUE COLORS

EMBOSSSED: EMBOSSING

PATTERN REPEAT: 5

INSTALLATION: ANGLE/ANGLE

MOLDINGS: PERFECT-MATCH-TRIMS

PACKAGING: 28.68 S/F CARTONS, 12 PLANKS
PER CTN. PALLET 50 CTNS.

SPC605

ALL-IN-STOCK

WWW.BENCHWICK.COM

WRAP UP IN COMFORT, UNWRAP YOUR STYLE



TB1627 LIGHT OAK



TB1065 CLASSIC TREE



TB1157 NOFOLK OAK



TB1158 SMOKED HICKORY



TB877 ROSEWOOD



TB1628 OAKTREE BROWN



TB917 LIGHT PINEWOOD



TB921 YELLOWTAIL LEAF



TB1155 ANTIQUE GRAY



TB1152 SHADOW BROWN



TB450 MAPLE LIGHT



TB166 AUTUMN OAK

SPC605

ALL-IN-STOCK

WWW.BENCHWICK.COM

WRAP UP IN COMFORT, UNWRAP YOUR STYLE



TB922 VINTAGE BLUE



TB1159 CHOCOLATE TREE



TB1072 STRAIGHT OAK



TB1153 HICKORY KNOTS



TB1141 HARD MAPLE



TB1635 Yellow Pine

SPC 605

SPECIFICATIONS

CLASSIFICATION: SPC RIGID CORE

SIZE: 7.17" X 48" X 6 MM

SPC CORE STANDARD DIMENSIONS: 5MM

COMMERCIAL WEAR LAYER: 20MIL

FINISH AND STRUCTURE: EMBOSSING

STANDARD BACKINGS: IXPE FOAM 1 MM

EDGE: MICRO BEVEL

COLORS: 16 UNIQUE COLORS

EMBOSSSED: EMBOSSING

PATTERN REPEAT: 5

INSTALLATION: ANGLE/ANGLE

MOLDINGS: PERFECT-MATCH-TRIMS

PACKAGING: 23.90 S/F CARTONS, 10

PLANKSPER CTN. PALLET 50 CTNS.





TB978 CREAM TEAK





SPC402

ELEVATE YOUR COMFORT

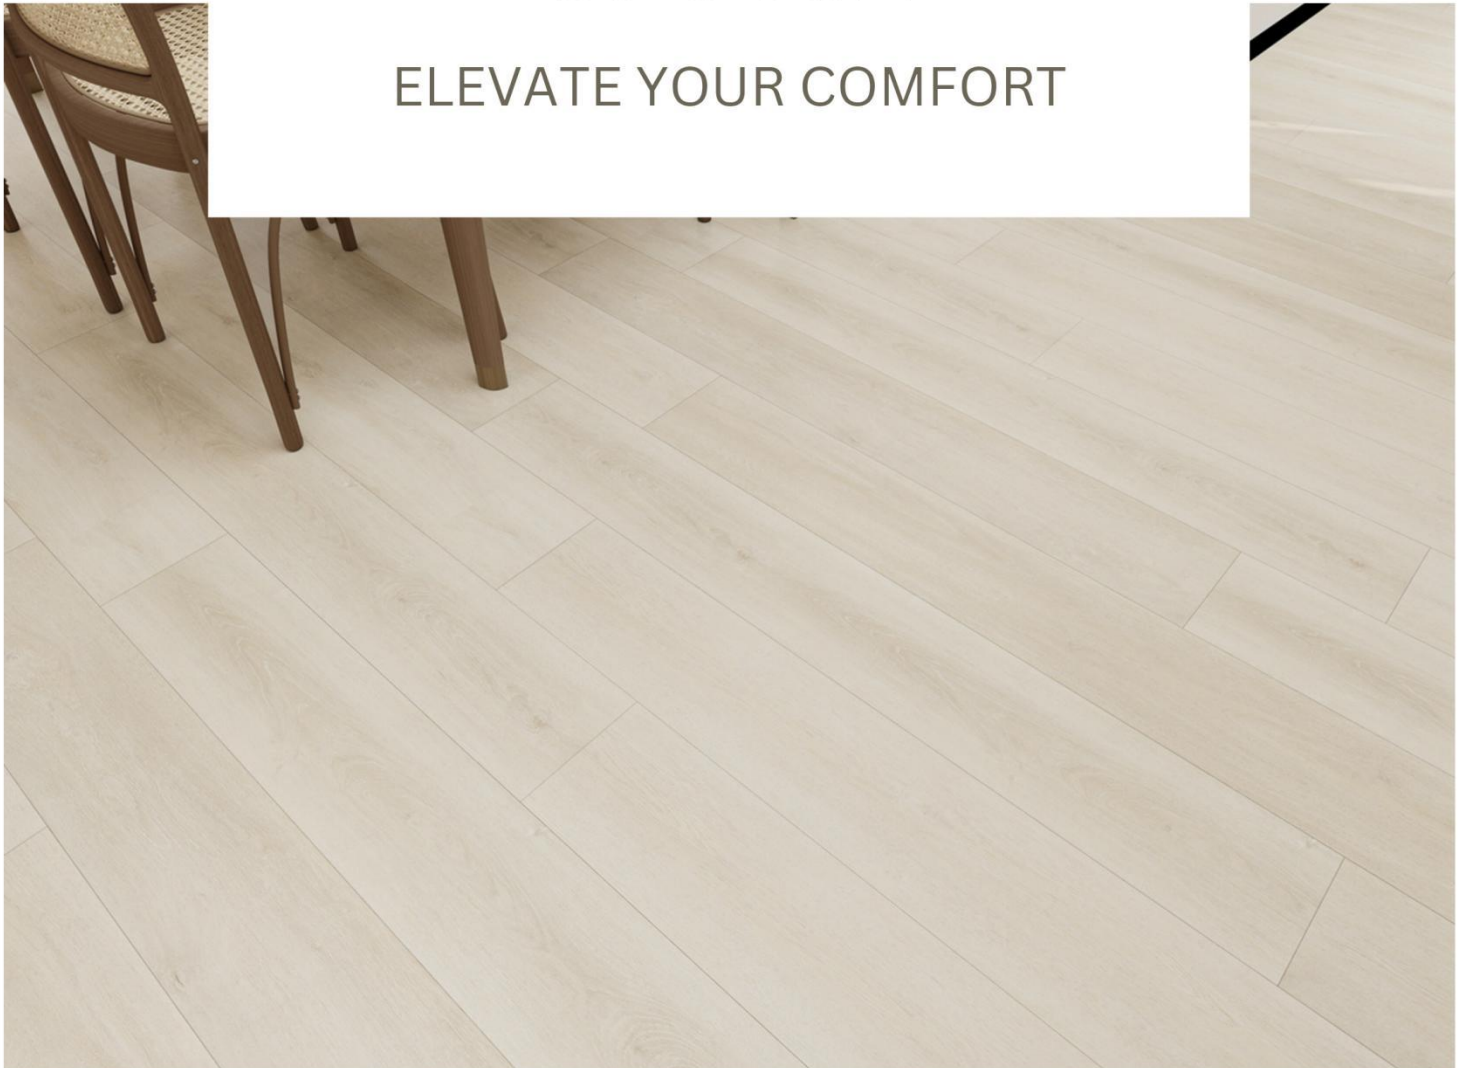

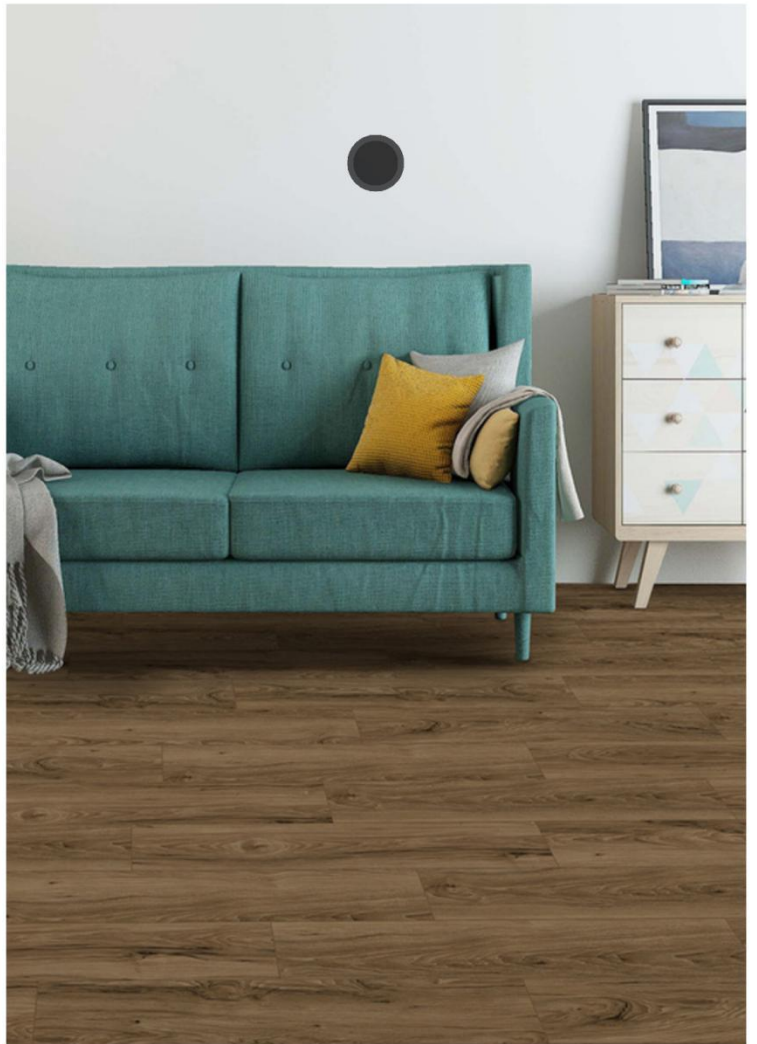

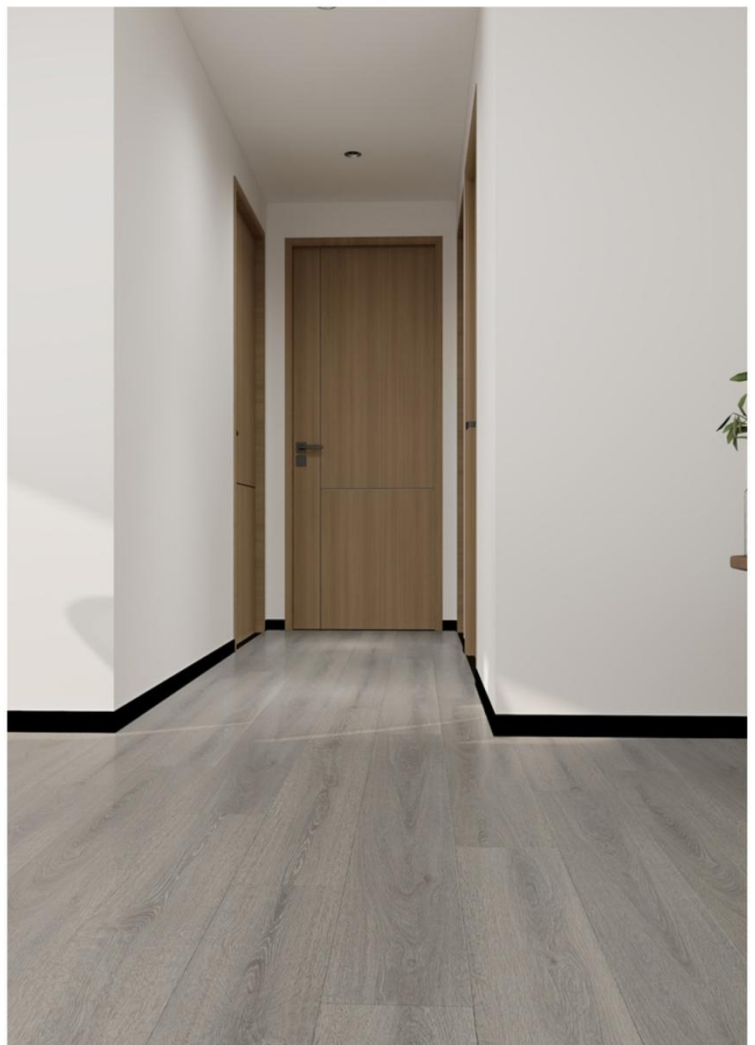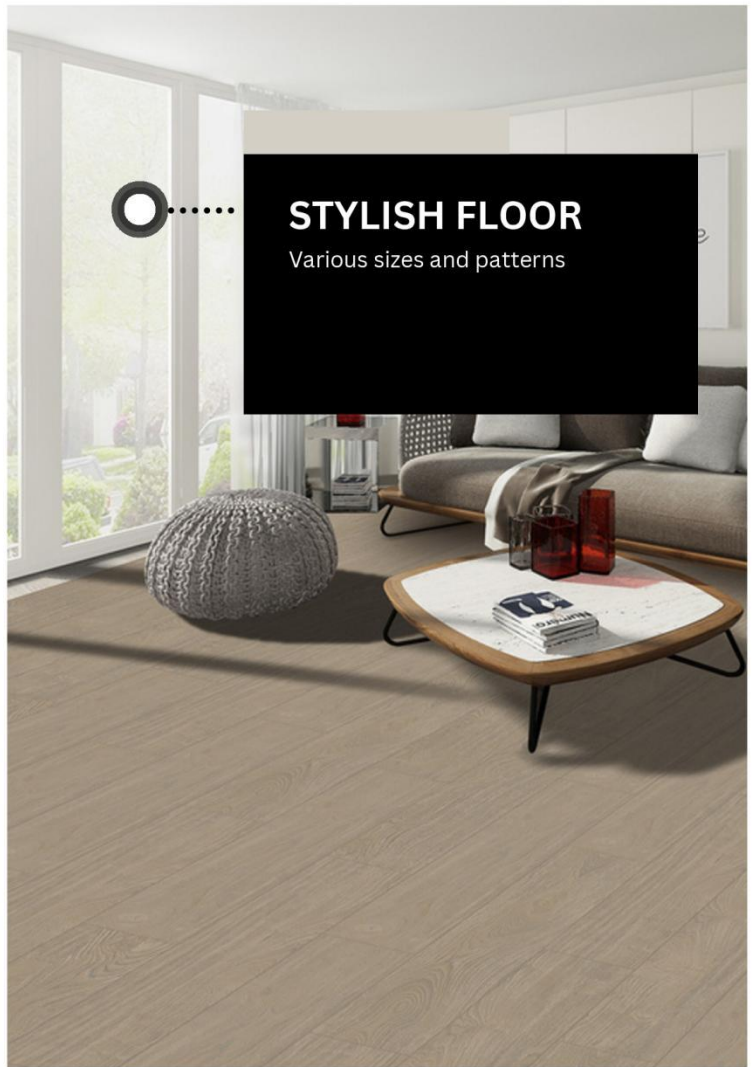



PERFORMANCE:

DIMENSIONAL STABILITY: ASTM F2199 - PASSED

HEAT STABILITY: ASTM 1514 - PASSED

LIGHT STABILITY: ASTM 1515 - PASSED RESIDUAL

INDENTATION: ASTM F1914 - PASSED STATIC

LOAD: ASTM F970 - PASSED

STAIN RESISTANCE: ASTM F925 - PASSED

SLIP RESISTANCE (STATIC COEFFICIENT OF FRICTION): ≥ 0.5 FIRE

PERFORMANCE (CRITICAL RADIANT FLUX): ASTM E648 – CLASS 1, ≥ 0.45

IMPACT SOUND TESTING: IICC-28 $\Delta IIC = 23\text{DB}$ STC SOUND TESTING:

ASTM E 90-2009 (R2016) – STC 62 IIC SOUND TESTING: ASTM E 492-09
(2016) $\epsilon 1 - IIC 65$



INSTALLATION

Methods: Float and Glue Down

Areas: On Grade, Below Grade & Above Grade

CARE & MAINTENANCE

For current floor care and maintenance guidelines please visit or contact benchwick team

WARRANTIES

Lifetime Limited Structure

Lifetime Limited Waterproof

Lifetime Limited Petproof

Lifetime Limited Residential Wear

15 Year Limited Commercial Wear

CERTIFICATIONS

Phthalate Free

FloorScore

Greenguard Gold

ISO 9001/14001

CONTACT & SAMPLES

For further information and sample requests:

www.benchwick.com

sales@benchwick.com