
PRODUCT SPECIFICATIONS

4 in LED Slim Selectable Lumens Recessed Kit (4 PACK)

Commercial Electric™

Premium Series
92331
SKU# 1011573818

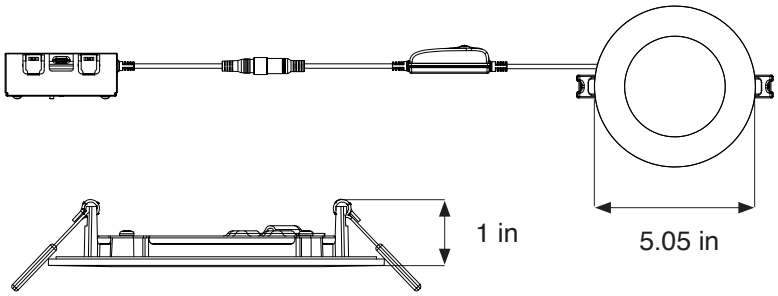


SPECIFICATIONS

Series	Premium Series
Model Number	92331
SKU	1011 573 818
OMSID	329776993
Power	7 W / 10 W
AC Voltage, Frequency	120V, 60 Hz
Color Temp (nom.)	2700K / 3000K / 3500K / 4000K / 5000K
Operation Temp	-25°C ~ 45°C
CRI	90
Lumen Output (min.)	580 lm / 820 lm
Dimming	YES
Lifetime Rating	L70/50000Hrs
Efficacy	60 lm/watt

ADVANTAGES

- 50 Watt Equivalent
- 50,000 Hours of Continuous Use
- 5 Year Warranty
- Slim design allows for installing on almost any shallow ceiling application
- Dimming to 10% Without Buzzing or Flickering
- IC Rated for Direct Contact with Insulation
- 90 CRI Provides High Color Quality
- Adjust Color of Light with Integrated Switch
  Warm White (2700K)
  Soft White (3000K)
  Neutral White (3500K)
  Bright White (4000K)
  Daylight (5000K)
- 2 Lumen select
- Wire clamps



PACKAGING

Weight (±0.5 lb)	0.84 lbs
Size (L x W x H) (±0.1 in)	5.05 in x 5.05 in x 1.2 in
Box Dimensions	9.72 in x 5.71 in x 5.39 in
Gross Weight	5.72 lbs
UPC	58219923313

NO HOUSING REQUIRED

Intertek

T24
Can be used to comply with California Title 24 High Efficacy requirements

ENERGY STAR

DIMMER LIST

LUTRON		
CTCL-153PDH-IV	DVCL-153P-WH	SLV-600P-WH
CTCL-153PDH-WH	DV-600PR-WH	LGCL-153PLH-WH
DVWCL-153PH-WH	DV-600-PR-BL	DVW-603PGH-WH
MSCL-OP153M-WH	TG-600PR-WH	DVLV-600PH
TG-600PR-LA	S-600P-WH	DV-103P-WH
TGCL-153PH-WH	TG-603PGH-WH	MRF2-6ND-120WH
S-600P-WH	S2-LH	MALVD-600-WH
AY-600P-LA	DVELV-300P-WH	PD-10NXD-WH


COOPER
DAL06P-C2

LEVITON
6674
S2-LH
6683
6672

INCLUDED IN BOX

•LED Downlight (4)
•Remote Junction Box (4)
•Hole Template (1)

NEW CONSTRUCTION OR REMODEL



APPLICATION

Suitable for Wet Locations

Contact Information 1-877-527-0313 · WWW.HOMEDEPOT.COM