



Installation Guide
Electric Baseboard Cover Kit



Safety is Our Priority

These instructions are intended to supplement the installation instruction manuals provided with your heater and thermostat. For questions regarding your electric baseboard heater's instructions and safety warnings, please refer to the owner's manual provided by the manufacturer.

 CAUTION	 FIRE HAZARD	 BURN HAZARD
High temperature. Keep electrical cords, drapes, and other furnishings away from heater and heater cover by 12 inches.	Do not place objects, furniture, or anything flammable within 12 inches of the electric baseboard cover.	Do not touch while unit is heating. To avoid burns, do not touch the hot surface with bare skin.

Installation Guide

Only proceed with installation if your heater is compatible with our Electric Baseboard Cover Kit. (Refer to the baseboard heater owner's manual for the risks associated with electric baseboard heaters.) If it does not meet the compatibility requirements, then do not use our kit. For questions regarding your electric baseboard heater's instructions and safety warnings, please refer to the owner's manual provided by the manufacturer.

Step 1: Remove Front Panel (Optional)

Some electric baseboard heaters have front panels that are removeable, which will need to be removed before you can proceed. To determine if your unit has a removeable front panel, please refer to the manufacturer's owner manual. If your unit does have a removable panel, then remove it per the manual's instructions; otherwise, proceed to Step 2.

Step 2: Place Wall Brackets

Creating space around your electric baseboard heater is important. Our Electric Baseboard Cover Kit is designed to sit 9-1/2 inches from the finished floor to the top of the cover. To achieve this height, wall brackets (included with Kit) need to be attached to the wall for the cover to be installed.

Note: The cover is designed to have a $\frac{3}{4}$ inch gap between the floor and the bottom of the cover for unrestricted air intake. A portion of the electric heater may be visible from underneath the cover.

Step 2.1

Ensure the wall behind the baseboard heater is patched and painted up to 10" above the finished floor.

Step 2.2

Locate the nearest stud (or some solid material behind the sheetrock) at both ends of the heater.

Step 2.3


To make the job easy, locate and drill a pilot hole 9" above the finished floor.

Step 2.4

Using the screws provided, secure one wall bracket at each end of the heater. A 6' panel requires three wall brackets (shown in image).


Step 2.5

There will be a thin gap between the wall bracket and the wall. This is intentional. This gap will receive the lip on the back side of the Baseboarders® panel (shown in image).

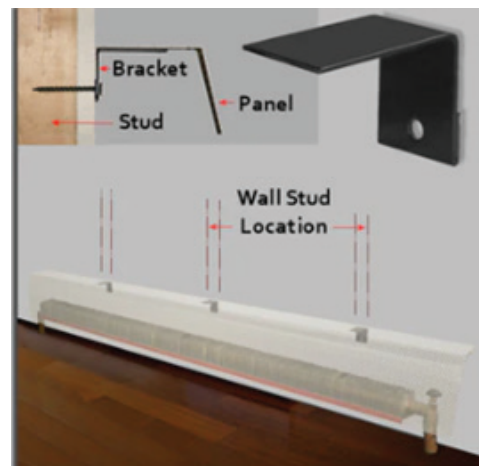

Step 3: Slide on Endcaps

Slide the endcaps onto both ends of the electric baseboard cover.

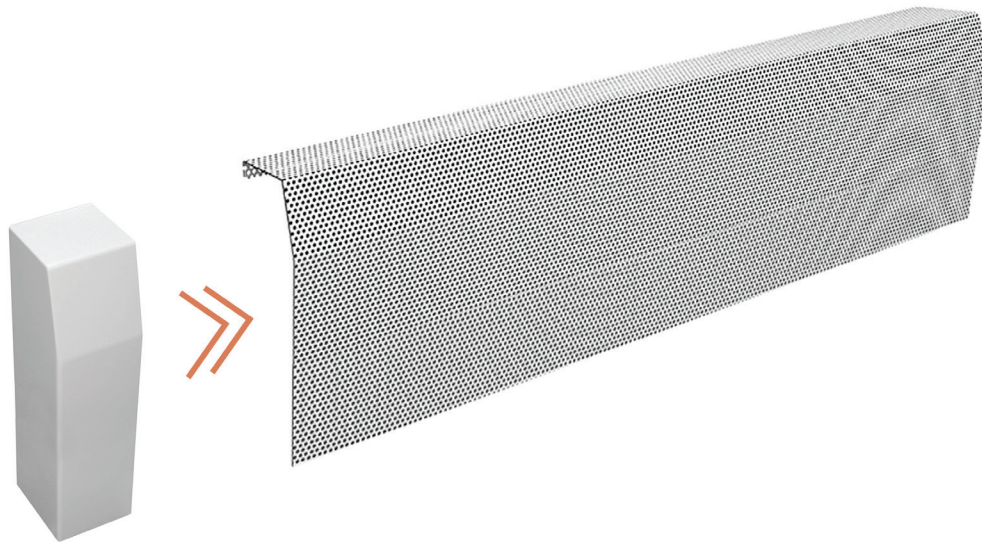

Step 4: Place the Fully Assembled Cover Over the Wall Brackets

There will be a $\frac{3}{4}$ inch gap between the floor and bottom of the cover. This opening maximizes air intake into the unit.



If at any time you have installation questions, please call or email our customer service team at 844.801.6429 or sales@baseboarders.com.