


# FAIRFIELD® GRADE 3

# CALLAN

## DIMENSIONS

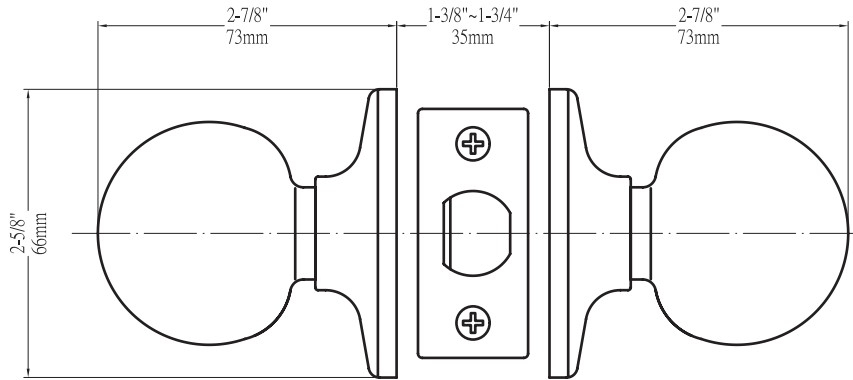


## STANDARD SPECIFICATIONS

<b>Door Prep</b>	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"	<b>Latches</b>	Entrance: 2-3/8" & 2-3/4" adjustable (9073) Passage/Privacy: 2-3/8" & 2-3/4" adjustable (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
<b>Backset</b>	Fits 2-3/8" and 2-3/4"	<b>Strikes</b>	1-3/4" x 2-1/4" full lip round corner (9103)
<b>Door Thickness</b>	1-3/8" ~ 1-3/4" door standard 2-1/4" Ext. Kit available	<b>Wood Screws</b>	Combination screws that suit both wood or metal door mounting
<b>Cylinder</b>	KW1 5-pin <b>standard</b> ; Entries packed KA5	<b>Door Handing</b>	Not Required

Model	Function	WT/ LB	CTN QTY		US3 Bright Brass	US5 Antique Brass	US15 Satin Nickel	US15A Antique Nickel	US10B Oil Rubbed Bronze	US10BE Edged Bronze	BLACK
100T - FD	Entrance	27 Lbs	20 Pcs	Item No.	KR1003	KR1005	KR1001	KR1008	KR1000	KR1007	KR1004
101T - FD	Passage	22 Lbs	20 Pcs	Item No.	KR1013	KR1015	KR1011	KR1018	KR1010	KR1017	KR1014
102T - FD	Privacy	22 Lbs	20 Pcs	Item No.	KR1023	KR1025	KR1021	KR1028	KR1020	KR1027	KR1024
115 - FD	Dummy	9 Lbs	20 Pcs	Item No.	KR1053	KR1055	KR1051	KR1058	KR1050	KR1057	KR1054

## FUNCTIONS

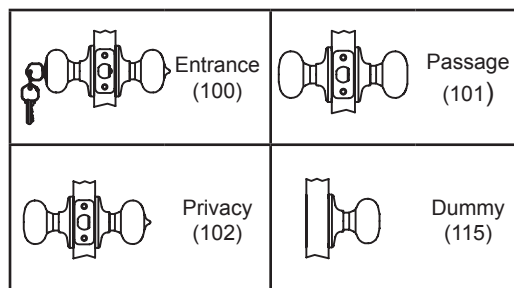

Extension Kits Available



# DELANEY®

Copyright © DELANEY HARDWARE. All rights reserved.