
# LED LINKABLE SHOP LIGHT

## User Manual

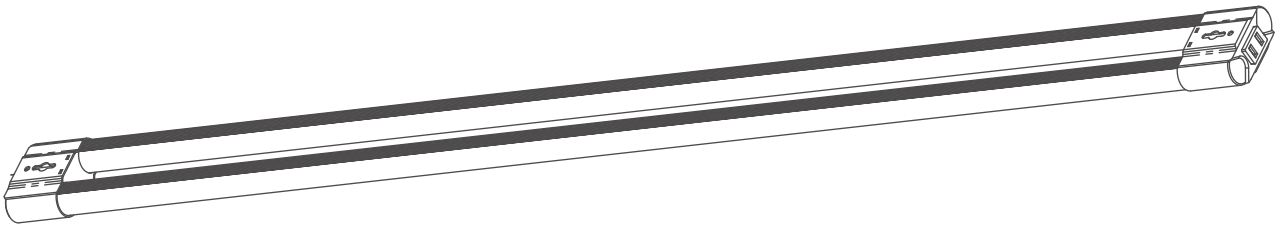


IMPORTANT: Read all safety precautions and installations carefully before installing or servicing this fixture.

- 5’ power cord with plug, link up to 4 shoplights together.
- Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.
- Assure that the fixture is mounted onto a structurally sound surface that will support the fixture.
- The fixture is designed for use in a 120 VAC, 60Hz fused circuit. Do not use on a dimming circuit.
- Do not look into the lights.
- Product is intended for use in garages, basements, work areas, utility rooms and recreation rooms.
- Maximum distance to the receptacle is determined by the length of the cord provided.(5ft, 2-prong, 120Vac parallel-blade plug)
- The fixture is intended to be installed directly beneath a ceiling-mounted receptacle. Excess cord should be secured to one of the supporting chains with a cable tie to keep it out of the work space.
- Use hook to support chain, not the electrical cord.
- Do not install on radiant-heating type ceiling.

WARNING: Failure to comply with these instructions could result in a potentially fatal electric shock and/or property damage.

## PRE-INSTALLATION

- Carefully remove the fixture from the carton and check to make sure that all hardware is included.
- Be careful not to misplace any of the hardware needed for installing the fixture. If all hardware is not included, call customer service number.

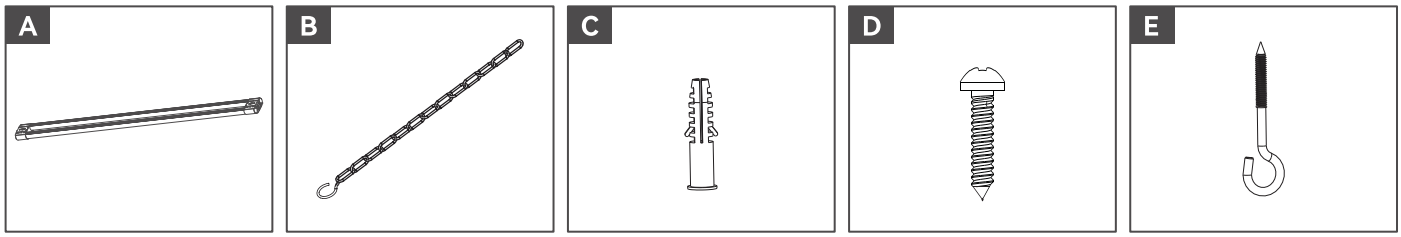


NOTE: The unit is intended to be installed directly beneath a ceiling-mounted receptacle. If there is excess cord, bind with string or a cable tie to keep it out of work space.

## INSTALLATION 1

**ATTACH THE CEILING HOOKS**

1. Choose desired location of light fixture making sure it is within reach of an outlet. Use a pencil to place a mark on the ceiling where each ceiling hook should go. Screw hooks in place until secure.(Figure 1)
2. Hook the hanging chain with lamp.(Figure 2)
3. Hook the hanging chain with ceiling hook. (Figure 3)

Figure 1

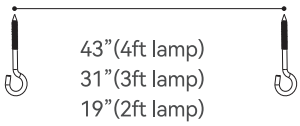



Figure 2


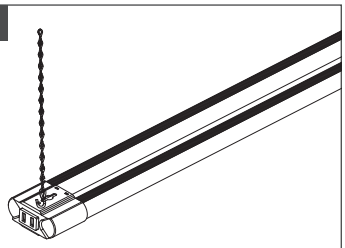



Figure 3

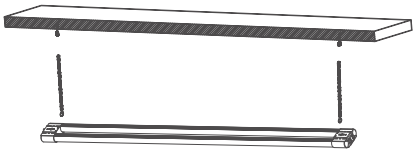

**CONNECTION OPTIONS**

1. If multiple lights are to be installed, make sure the distance from the end of front light to the head of next one is less than the 5’ long power supply cord.
2. Plug the power cord into the receptacle from front light to next one .(Figure 4)
3. Plug power cord into an outlet and use in-line switch) power each light on .(Figure 4)

Figure 4

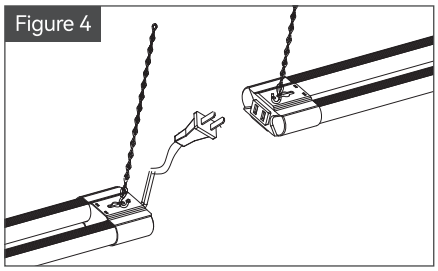

**NOTE: MAX. 4 UNITS LINKABLE.**

THIS FIXTURE IS INTENDED TO BE ONLY INSTALLED DIRECTLY BENEATH A CEILING-MOUNTED RECEPTACLE.

## INSTALLATION 2

**Install fixture fushmount using screws**

1. Install two screws on mounting surface, spacing between screws should be 42.8 ”(4ft lamp),33”(3ft lamp),21”(2ft lamp)Gap (D) should be 0.05”.
2. Lift fixture up to screws and slide to one side to secure into place. Fixture should be firmly fixed against screws.
3. Plug in power cord to outlet.

