


Freeze Miser®

INSTALLATION GUIDE

OUTDOOR FAUCETS OR HOSES UP TO 150 FEET

HOW IT WORKS

The Freeze Miser® design senses temperature. As needed, the technology releases a minimal amount of water to keep the water temperature at 37°F/3°C. As the water temperature fluctuates, so will the drip, utilizing the least amount of water.

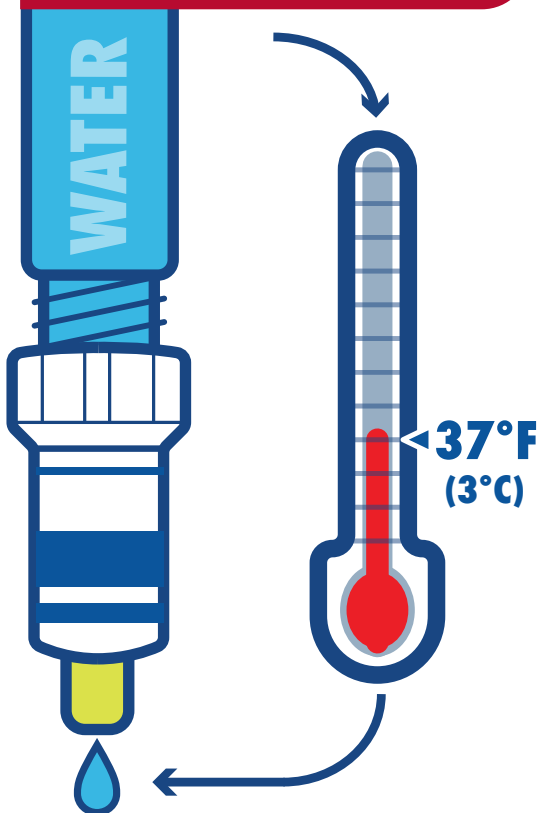

- Hand-tighten the Freeze Miser® on to an outdoor faucet or hose.
- Turn the water supply valve to a fully open position. A minimum of 10 PSI water pressure is required.
- Install the Freeze Miser® in a horizontal or vertical position. In the upright position, the small brass end should be at the bottom. Do NOT install the Freeze Miser® with the brass end pointed upward.
- If placing on a hose (150 feet or less) – Keep the Freeze Miser® off the ground to ensure the Freeze Miser® senses the water's temperature only in the hose.

Expert Tip – Before the cold season starts, we recommend placing the Freeze Miser® in a freezer for several hours. Then quickly place on an outdoor faucet and open fully. Water should discharge through the Freeze Miser®, and the flow should stop in a short while.

PROTECT FAUCETS, HOSES UP TO 150 FEET, ANIMAL WATERS FLOAT VALVES, RV WATER HOOKUPS, WATER WELLS, AND MORE



FOLLOW US @ FreezeMiser
or www.FreezeMiser.com

Freeze Miser®

Baker Products, LTD.

P.O. Box 100, Kingsbury, TX 78638
info@freezemiser.com

Need Help or additional information
Call: 1 (833) 302-0147

For Videos, Instructions, FAQs
visit www.FreezeMiser.com