

INSTRUCTIONS

SKU: HCF-0801-00

⚠ WARNING

- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.

ASSEMBLY

1. Connect your wall bracket (B) to your junction box(A)(not included) using the provided screws (C).

2. Make electrical connections using the wire nuts (J).

Connect the cord with the ribbed surface to the white wire of the supply circuit. Connect the half with the markings and smooth surface to the black wire of the supply circuit.


Connect the bare copper grounding wire from the fixture to the green screw on the mounting bracket and the grounding conductor of the supply circuit. Use UL/CSA Listed wire connectors suitable for the size, type and number of conductors. No loose strands or loose connections should be present.

3. Join the canopy (D) to the wall bracket (B) using screws(E).

4. Install light bulb(I).

Bulb Type & Wattage: **ONE (1) GU10 socket 35W (Max) light bulb** or LED equivalent light bulb.

5. Restore Electrical power when complete.

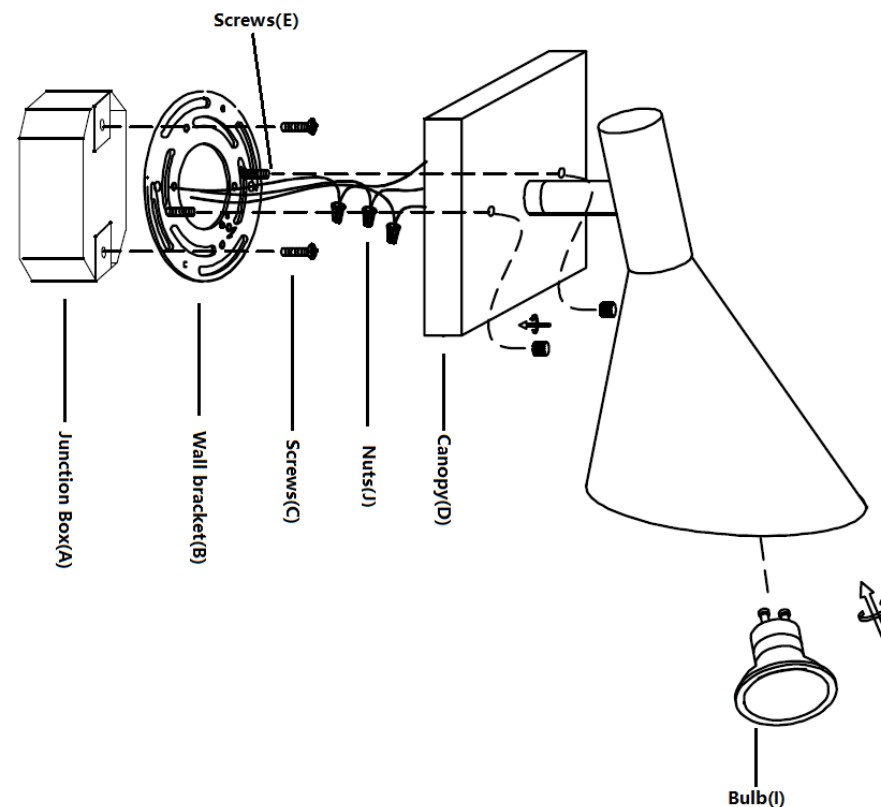

CONTACT US

Thank you for your purchase! If you have any questions or concerns, don't hesitate contact us at help@cs-supportpro.com. We'll resolve your problem ASAP! Customers are always the best teachers to keep us growing!