



## 12 OUTLET SURGE PROTECTOR + 2 USB PORTS

Premium quality, fireproof surge protection and USB charger

### KEY FEATURES

- 12 Outlets
- 204,000 Amps / 3420 Joules
- Ceramic, Fireproof Surge Protection
- <58 dB Noise Filtering
- Resettable Circuit Breaker
- 2 USB Charging Ports ( 2.4A )
- Surge Protection and Ground LED Indicator
- 8 ft. Heavy-Duty Power Cable
- Angled Space Saver Plug

### FIREPROOF SURGE PROTECTION


Traditional surge suppression products use standard MOV (Metal Oxide Varistor) components. TrickleStar products incorporate advanced surge protection technology. The MOVs are encased in a ceramic casing and are capable of suppressing more energy and dissipating heat faster than traditional MOVs. More importantly the ceramic casing is fireproof and is capable of preventing fire during abnormal surge conditions.

### APPLICATION


Suitable for TV / Home Theater setups

### PRODUCT WARRANTY

- 10 Year Product Warranty
- \$500,000 Connected Equipment Warranty
- 30 Day Money Back Guarantee
- 10 Year 1 for 1 Replacement If Damaged By An Electrical Surge

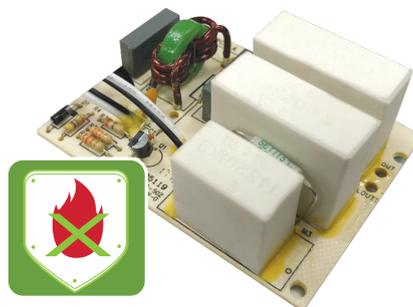

## APPLICATION DIAGRAM

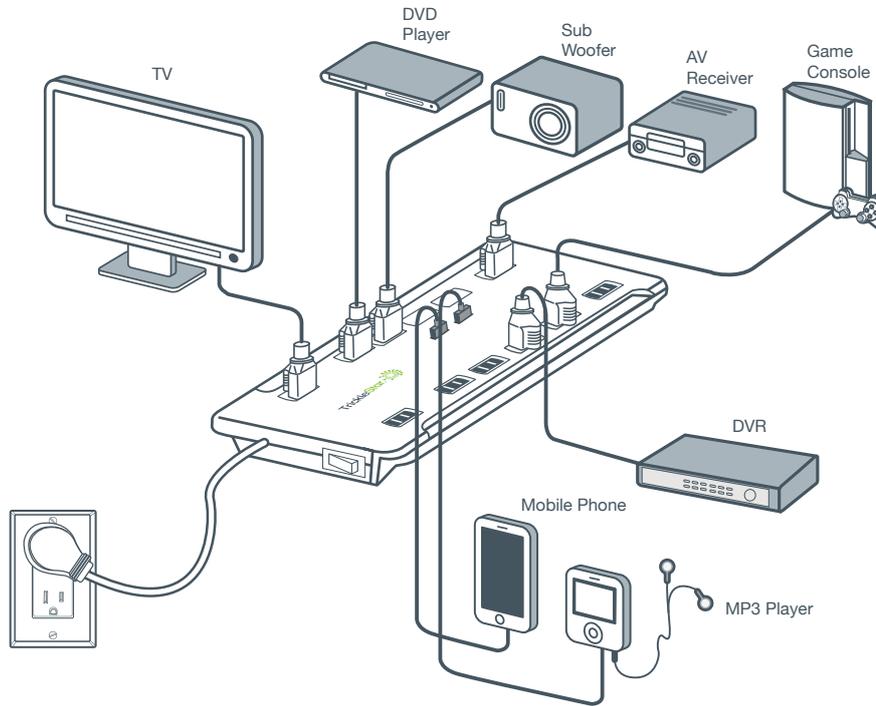

## ELECTRICAL SPECIFICATIONS

### FOR INDOOR USE

<b>Voltage</b>	120 VAC +/- 10% 60Hz
<b>Power Rating</b>	15A, 1800W
<b>Surge protection</b>	204,000 Amps / 3420 Joules
<b>VPR</b>	L-N 330V, L-G 400V, N-G 400V
<b>Surge Response Time</b>	<1ns
<b>Noise Filtering</b>	<58dB
<b>Standby Power Consumption</b>	<1 Watt
<b>USB Charging Port</b>	5VDC, 2.4A Total
<b>Cord Length</b>	8 ft.

## APPROVALS

Conformity to product standards for safety and EMC.

- UL (US & Canada)
  - Relocatable Power Taps, UL 1363, Fourth Edition
  - Standard for Surge Protective Devices, UL 1449, Fourth Edition
- US Department Of Energy (DOE) VI certified

## PHYSICAL SPECIFICATIONS

<b>Operating Temperature</b>	32° to 104° F
<b>Storage Temperature</b>	14° to 140° F
<b>Humidity</b>	5 to 90% N/C
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

<b>TS1205</b>	12 Outlet Surge Protector, 2 USB Port (2.4A), 3420J, 8 ft Cord, Black
182SP-US-12U2P-PA8BP	

