

INSTALLATION AND SAFETY INSTRUCTIONS

IMPORTANT! DISCONNECT POWER AT MAIN FUSE BOX TO PREVENT POSSIBLE INJURY FROM ELECTRICAL SHOCK.

1.Remove all parts and parts packages from the carton. Secure the crossbar (2) to the outlet box (1) using two screws (3)(not provided.)


A) The below instruction for INCANDESCENT fixture:

Thread nut (4) onto threaded nipple (5) to ensure at least 5 threads are expose above nipple.Then thread that end of the nipple into the crossbar (2) until the nut is secure against the crossbar. Attach the canopy (14) up the threaded nipple (5) about half-way and secure with finial (15)

B) The below instruction for FLUORESCENT fixture:

Attach the canopy (14) to the crossbar (2) and secure with two finails (15)

2.Connect the wire, splice the black or smooth round fixture wire (10) to the black supply wire (12) and the white ,ribbed or flat-sided fixture wire (13) to the white supply wire (9)using wire connectors (11) (not provided).

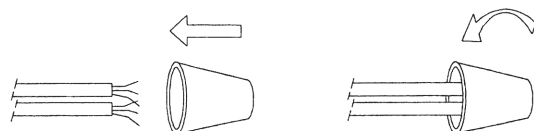


CAUTION: BE CERTAIN THAT NO BARE WIRE STRANDS ARE EXPOSED OUTSIDE OF THE WIRE CONNECTORS.

3.Attach the house ground wire(8) and the bare copper fixture ground wire(6).to the green ground screw (7) mounted to the crossbar (2) in the threaded hole next to the two bumps , and tighten .Carefully tuck all spliced wires into the outlet box(1).

4.Slide the canopy (14) the remaining way up the threaded nipple (5)and again secure with finial (15).Insert lamp(s) (sold separately)into socket(s).Refer to label on fixture for maximum wattage.

5.Slide the glass (16) up against canopy (14) and secure with the round ring or basket(17),with screws (18).

The assembly is now complete and power may be reconnected at the main fuse box.

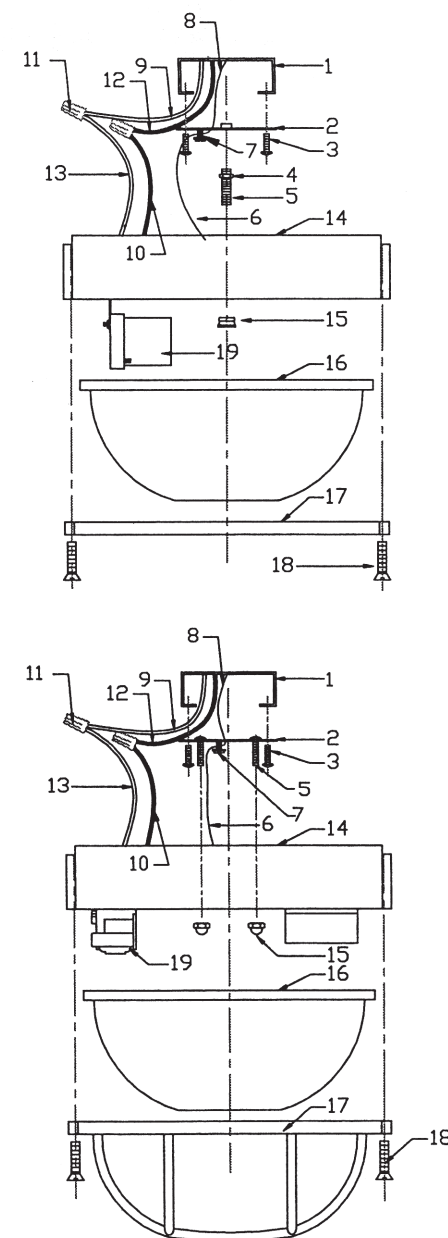

VO-170