

Jack Kit With Adapter

Zero-Turn-Radius Side-Discharge or Rear-Discharge Riding Mower

Model No. 126-7282

Model No. 127-6666

Installation Instructions

⚠ WARNING

CALIFORNIA Proposition 65 Warning


This product contains a chemical or chemicals known to the State of California to cause cancer, birth defects, or reproductive harm.

Safety

Safety and Instructional Decals



Safety decals and instructions are easily visible to the operator and are located near any area of potential danger. Replace any decal that is damaged or lost.

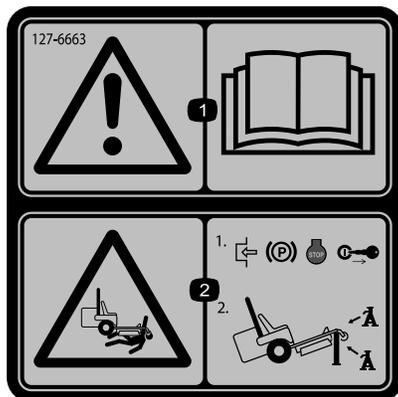

127-6663

1. Warning—read the *Operator's Manual*.
2. Crushing hazard—1) Engage the parking brake, stop the engine, and remove the key from the ignition; 2) Jack the machine using a manufacturer-approved jack, and always use a jackstand.



Installation

Loose Parts

Use the chart below to verify that all parts have been shipped.

Description	Qty.	Use
Jack	1	Install the optional adapter.
Adapter	1	

Installing the Optional Adapter

You can install and use the adapter to raise and lower the jack with an impact wrench.

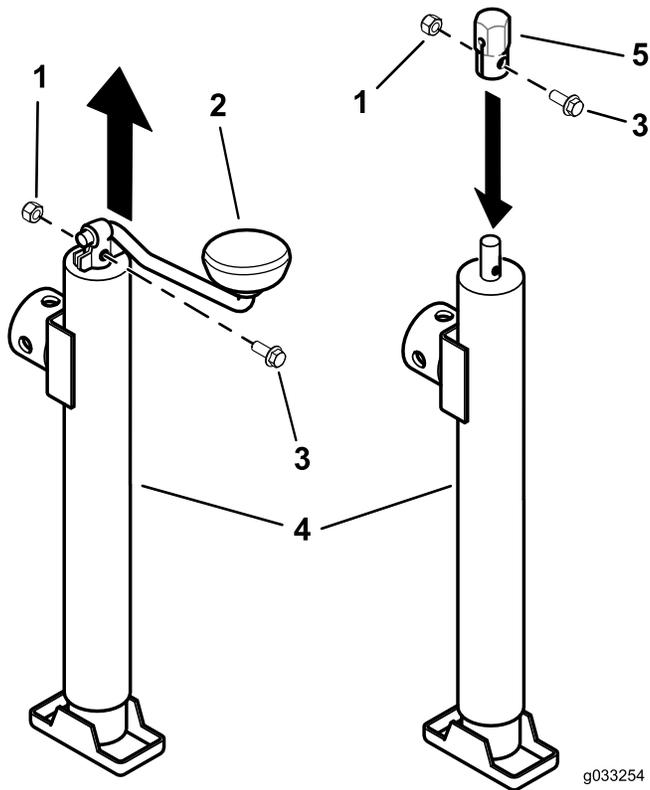


Figure 1

1. Existing locknut
2. Remove the handle.
3. Existing bolt
4. Jack
5. Install the adapter

Operation

Using the Jack

Use the jack to raise the front end of the mower to allow you to clean under the mower deck or change the blades.

⚠ WARNING

The mower could fall onto someone and cause serious injury or death.

- Read and understand the *Operator's Manual* before performing maintenance.
- Always turn the engine off, set the parking brake, and remove the key before performing any maintenance to the mower.
- Do not keep the mower raised using the jack for extended periods of time.
- Always use the jack on a level surface.
- Ensure the jack is secured properly to the mount using the jack pin.
- This jack is intended for use with the mower as described in this instruction sheet. Other uses may cause unseen damage or failure of the jack.
- Do not rely solely on the jack for support. Use adequate jack stands or equivalent support.
- Do not mount or dismount the mower while the jack is raised.
- Prior to each use, inspect the jack and mount kit for proper working function and no visible signs of damage.

Note: Only use (an) approved jack(s) rated at 907 kg (2,000 lb) or higher lift capacity with the jack mount.

1. Disengage the blade control switch (PTO), move the motion-control levers to the NEUTRAL-LOCK position, and set the parking brake.
2. Shut off the engine, remove the key, and wait for all moving parts to stop before leaving the operating position.
3. Raise the mower deck to the transport position.
4. Insert the jack tube onto the jack mount, align the mounting holes, and secure the jack with the jack pin (Figure 2).
5. Rotate the handle or adapter on the jack to raise the mower until the jack is at the desired height. Do not over-extend the jack.

⚠ WARNING

Raising the mower could cause fuel leakage.

- Check for any fuel leakage before performing maintenance.
 - If leakage occurs, immediately lower mower and drain fuel to eliminate the hazard.
6. Lower the mower onto jack stands or an equivalent support.
 7. Perform the maintenance.
 8. When the maintenance is completed, remove the jack stands or equivalent support.
 9. Rotate the handle or adapter on the jack to lower the mower.
 10. Remove and store the jack (Figure 2).

Note: The mower is not designed to store the jack when it is not being used. Do not drive the mower with the jack installed.

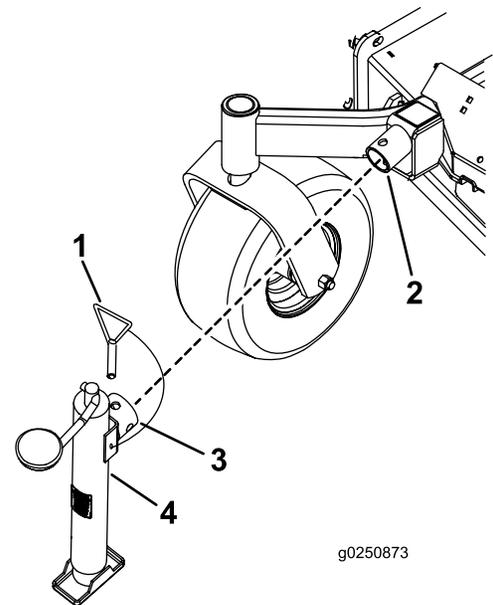


Figure 2

- | | |
|--------------------|--------------|
| 1. Jack pin | 3. Jack tube |
| 2. Jack-mount tube | 4. Jack |

Notes: