



RULE BREAKER TILE

Specification

Product Type:	Carpet Tile
Construction:	Tufted
Surface Appearance:	Textured Patterned Loop
Gauge:	1/10" (39.37 rows per 10 cm)
Pile Weight:	14 oz/yd ² (474 g/m ²)
Pile Thickness:	.071" (1.80 mm)
Stitches Per Inch:	9.8 (38.58 per 10 cm)
Dye Method:	100% Solution Dyed
Fiber Type:	Envirostrand® SD PET
Stain Release Technology:	Mohawk Protection Plus Stain
Soil Release Technology:	Mohawk Protection Plus Soil
Density:	7,098
Weight Density:	99,380
Primary Backing:	Non-Woven Synthetic
Secondary Backing:	UltraSet® Matrix
Installation Method:	Brick Ashlar / Vertical Ashlar / Monolithic / Quarter Turn
Size:	24" x 24" (.6096 m x .6096 m)
Flammability:	ASTM E 648 Class I (Glue Down)
Smoke Density:	ASTM E 662 Less than 450
Static Propensity:	AATCC-134 Under 3.5 KV
IAQ Green Label Plus:	100055
CRI Appearance Retention Rating:	Heavy Traffic
Warranties:	10 Year Limited Wear Warranty 10 Year Limited Static Protection Warranty 10 Year Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty 10 Year Limited Colorfastness to Atmospheric Contaminants

All specifications are subject to normal manufacturing tolerances.



EnviroStrand™ SD

PERFORMANCE & DESIGN

- An amazing range of style and color options available for design flexibility
- EnviroStrand™ SD is constructed with our patented Continuum™ technology, providing the ultimate innovation in PET carpet
- Mohawk Protection Plus Soil & Stain Resistant Technology
- Ease of maintenance

SUSTAINABILITY


- Contains a minimum of 90% recycled content
- Requires less energy to produce in the manufacturing process
- Through our patented process, Mohawk recycles 6.2 billion PET bottles every year
- CRI Green Label Plus® certified

WARRANTY

- 10 Year Limited Wear Warranty
- 10 Year Static Warranty
- 10 Year Limited Colorfastness To Atmospheric Contaminants
- 10 Year Limited Stain Resistance Warranty
- 10 Year Colorfastness To Light

UltraSet® Matrix

Aladdin Commercial continues its dedication to sustainable solutions with UltraSet® Matrix, the next generation in carpet tile backing. Using advanced materials and patent pending engineering, UltraSet® Matrix lowers environmental impact without sacrificing performance. UltraSet® Matrix simplifies floor preparation and installation, greatly reduces sub-floor moisture concerns, and is easier to ship and handle.

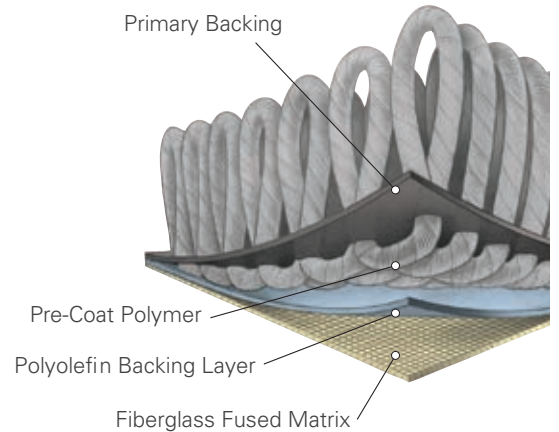

PERFORMANCE

- Provides permanent dimensional stability
- Tiles are impervious to moisture damage from spills and water extraction cleaning
- 10 Year Limited Carpet Tile Warranty for: Wear, Static Protection, Edge Raveling/Zippering, Delamination, Dimensional Stability
- Seamless transitions between carpet and hard surface flooring with 2.5mm LVT resilient products

INSTALLATION

- Simplifies complex floor preparation with no need to encapsulate old adhesives**
- Greatly reduces sub-floor moisture concerns and saves money on mitigation
- Worry free installation with no visible moisture present using our Flexlok Tab System
- Superior construction offers reliability for the life of your installation

SUSTAINABILITY

- UltraSet® Matrix is manufactured using less energy than other carpet tile products
- Polyolefin backing contains no plasticizers
- Contains a minimum of 40% pre-consumer recycled content based on total product weight*
- CRI Green Label Plus certified
- Declare Red List Free
- Recyclable
- Able to ship more per box resulting in a lower environmental impact from transportation

*Recycled content claim third party verified by UL (Underwriters Laboratory)

**Consult Mohawk Installation Instructions for any applicable restrictions