


# Low-Voltage Underground Landscape Lighting Cable

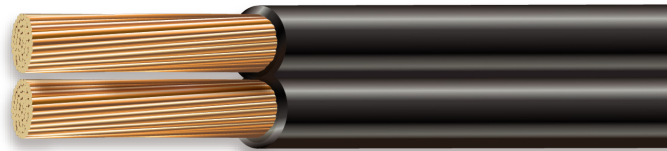

**Listed for  
Outdoor Use**

**150 Volts for UL  
30 Volts for cUL**

**Rated -20°C to 60°C**

## APPLICATIONS

Cerrowire's Low-Voltage (Low-Energy) Underground Landscape Lighting Cable is designed for landscape, security, and outdoor accent lighting applications not to exceed 150 volts. Landscape Lighting Cable is sunlight-resistant, suitable for direct burial, and for use at temperatures between -20°C and 60°C. 16/2 and 14/2 in 50', 100' and 500' lengths. 12/2 in 100', 200' and 500' lengths. 10/2 in 500' length. UV Resistant.

## ASSEMBLY

Two bare annealed flexible stranded copper conductors are duplexed in a flat construction to promote easy teardown during installation and insulated/jacketed in black premium-grade PVC with an SPT ripcord.

## INDUSTRY STANDARDS/CERTIFICATIONS

UL® 1493  
UL® Underground Low-Energy Circuit Cable for Outdoor Lighting  
C(UL) Low-Voltage Landscape Lighting (LVLL)  
EU RoHS Directive

## SURFACE PRINT

(UL) E236055 2/C 14AWG (2.08mm<sup>2</sup>)FT2 + 60°C 150V - C(UL) (LVLL 30V)  
ME-2 LOW VOLTAGE LANDSCAPE LIGHTING WIRE ULECC

©2010, Cerro Wire LLC  
All Rights Reserved



MADE IN THE USA

**cerro**

Electrical®

866.572.3776 | FAX 812.793.2626  
www.cerroretail.com

Marmon Retail Home  
Improvement Products, Inc.

# Low-Voltage Underground Landscape Lighting Cable

PART NUMBER	NO. OF COND.	AWG SIZE	PUT-UP	COND.	NOMINAL INSULATION THICKNESS		NOMINAL OVERALL DIAMETER		POWER RATING			PKG. PER CTN.
					INCHES	MM	INCHES	MM	VOLTS	AMPS	WATTS	
241-1202B	2	16	50	26/30	0.045	1.14	0.155x0.296	3.94x7.52	150	13	2850	10
241-1202C	2	16	100	26/30	0.045	1.14	0.155x0.296	3.94x7.52	150	13	2850	5
241-1202J	2	16	500	26/30	0.045	1.14	0.155x0.296	3.94x7.52	150	13	2850	-
241-1402B	2	14	50	41/30	0.045	1.14	0.170x0.354	4.32x8.99	150	15	4050	10
241-1402C	2	14	100	41/30	0.045	1.14	0.170x0.354	4.32x8.99	150	15	4050	5
241-1402J	2	14	500	41/30	0.045	1.14	0.170x0.354	4.32x8.99	150	15	4050	-
241-1602C	2	12	100	65/30	0.045	1.14	0.190x0.385	4.83x9.78	150	20	5400	5
241-1602F	2	12	200	65/30	0.045	1.14	0.190x0.385	4.83x9.78	150	20	5400	-
241-1602J	2	12	500	65/30	0.045	1.14	0.190x0.385	4.83x9.78	150	20	5400	-
241-1802J	2	10	500	104/30	0.045	1.14	0.400x0.200	5.08x10.16	150	30	7050	-

<sup>(1)</sup> Amps and watts are offered ONLY as a guide to the end user.

PACKAGE CODE	B	C	F	J
SIZE	50' SPOOL	100' SPOOL	200' SPOOL	500' SPOOL
16 & 14 STRANDED	X	X		X
12 STRANDED		X	X	X
10 STRANDED				X