

Assembly instruction




















Please read these instructions carefully before starting assembly. We suggest you carry out the assembly on a soft surface like a carpet, so as to avoid scratching the paint. Please note because of the nature of cast metal, you may find roughness on the surface which enhances the beauty of the product and is not a defect.

*Do not discard any of packaging until you have checked that you have all parts and pack of fittings.

*Keep children away during assembly. This item contains small parts which can be swallowed by children.


*Retain the assembly instructions for future reference.

PARTS LIST

Part No.	Description	Part picture	Qty	Part No.	Description	Part Picture	Qty.
①	Backrest		1	A	M8 Flat washer		11
				B	M8 Spring washer		11
②	Chair Seat		1	C	M8 Nuts		11
				D	M6*30 Stud		2
③	Front Chair Legs		2	E	M6 Flat washer		6
④	Back Chair Legs		2	F	M6 Spring washer		6
⑤	Right Arm		1	G	M6 Nuts		6
				H	M6*25 Stud		4
⑥	Left Arm		1	I	M6 protect hats		6
				J	M8 protect hats		11
⑦	Screwdriver		1	⑧	Wrench		1
L	Rubber Leg Pad		4	Note: Rubber Leg Pad L have been presaaembled			


INSTRUCTIONS

Step 1

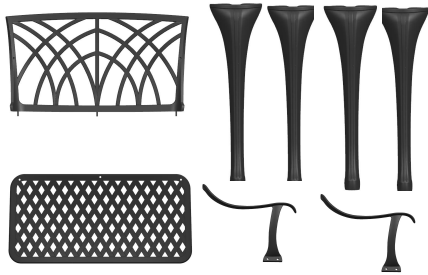

Place all parts on a clean and soft surface

Step 2

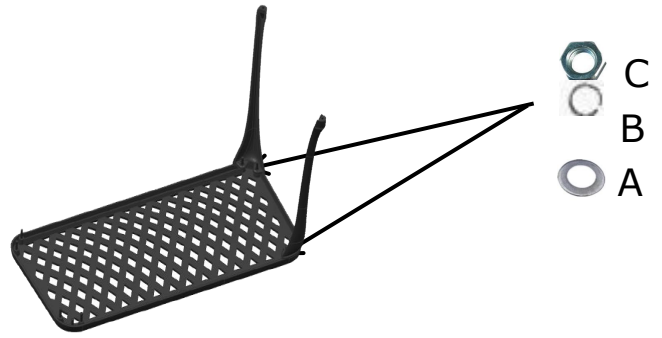


Attach the front and back Legs (③,④) to the Studs on the Chair Seat (②) using Washers and Nuts (A,B,C). Tighten the Nuts using the wrench.

Step 3




Attach the Backrest (①) to the Chair Seat (②) using Washers and Nuts (A,B,C). Tighten the Nuts using the wrench ..DO NOT over tighten.

Step 4

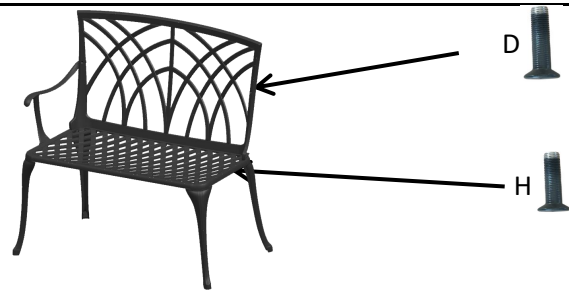

Attach the Right and Left Arm(⑤,⑥) ,using the studs (D) and washer,nuts (E,F,G) ,DO NOT over tighten .and then using Studs (H) and Washers and Nuts (E,F,G).Adjust to a correct place ,then tighten D&H.

Step 5

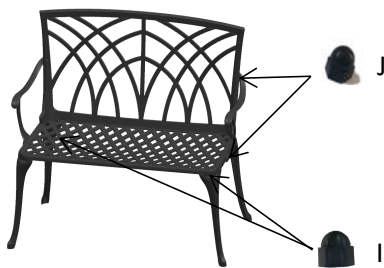

Adjust the pre-installed Rubber Pad (L) until the chair is level with the ground , Upon completion of full assembly and bolted up-all screws can be tightened down.Tighten all the nuts and cover them with nut caps(I&J).