

5 - SHELF HEAVY-DUTY STORAGE UNIT


ITEM #1000 000 000

MODEL #XXXXX



Use and Care Guide

TOOLS REQUIRED



Mallet




Safety Gloves



Screwdriver

HARDWARE INCLUDED

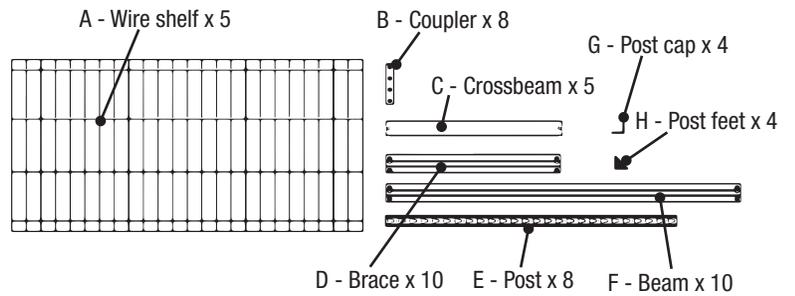





Installation

1 CONNECTING THE POSTS

- Install the post feet (H) at the bottom of each of the four lower posts (E). See Fig. a.



IMPORTANT: All posts should be positioned with the rectangular end of the slots pointing downwards.

- Position one coupler (B) on the bottom edge of the top post (E) and tap the coupler down until the midpoint of the coupler is aligned with the bottom of the post. See Fig. b.
- Position the coupler (B) into the top edge of the lower post (E), and tap down until the two posts connect fully into the coupler (B). See Fig. c.
- Position the second coupler (B) at the same level of the first coupler and tap down to attach. See Fig. d.
- Repeat for all four posts (E).

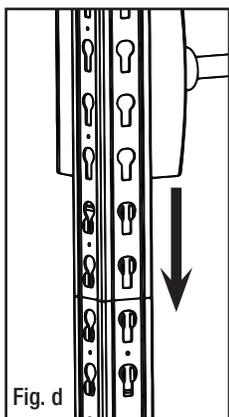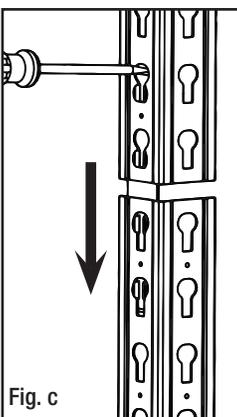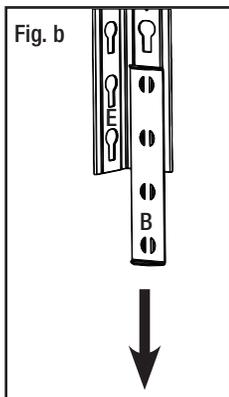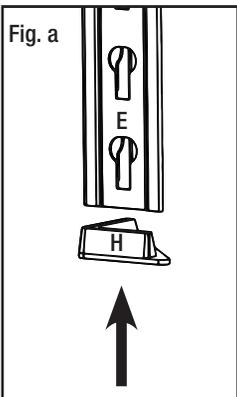


2 ATTACHING BRACES ON THE POSTS

- Attach one brace (D) on the inside of the two assembled posts (E). Start with the first slot at the top of the posts (E).
- Place the "shelf-clip" into the post slot, and tap lightly to seat the shelf clip.
- Repeat for all other braces (D) and posts (E).

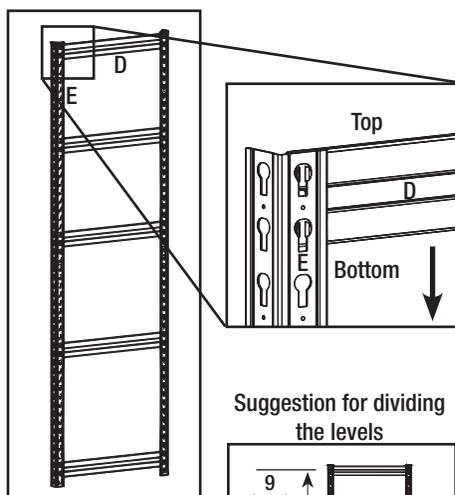
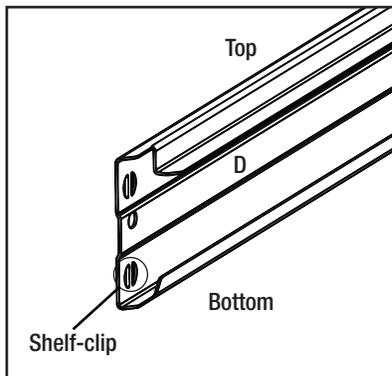


Suggestion for dividing the levels

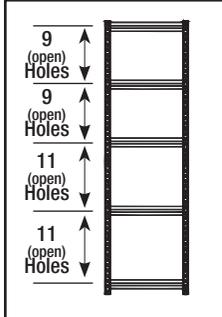



3 ATTACHING THE BEAMS

- Attach the beams (F) between the two post and brace assemblies. Start with the upper beam and work downwards.
- Make sure each beam (F) is installed at the same level as the brace (D). This is possible by counting the number of post slots.
- TIP! When assembling the first beam it is easy to put one post and brace assembly against the wall for extra stability.

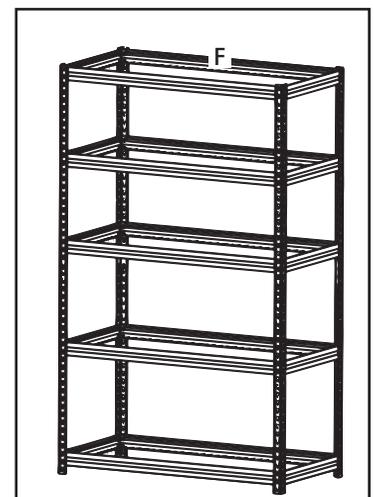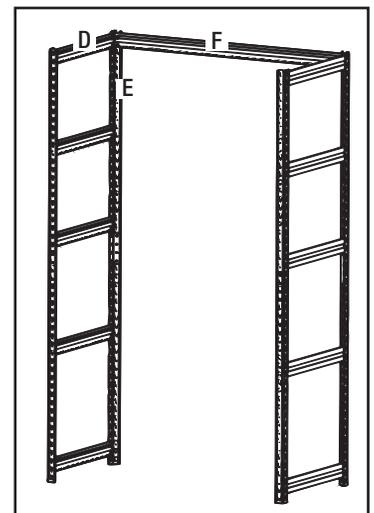

4 ASSEMBLING THE CROSSBEAMS

- Place the bottom of the crossbeam (C) into the notch found on the bottom center of the beam (F). Once you have the bottom into position, rotate the crossbeam (C) to 90 degrees, making sure you hear the crossbeam (C) click into the top notch of the beam (F).

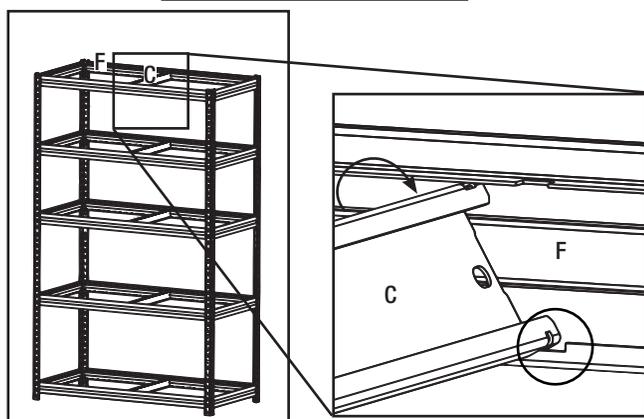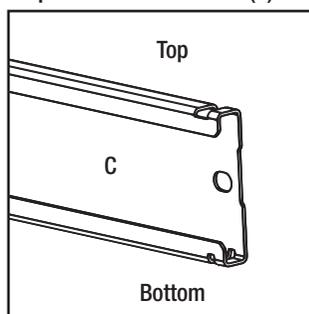

5 ATTACHING THE WIRE SHELVES AND POST CAPS

- Place the wire shelves (A) on the ledge of the assembled beams (F) and braces (D) with the flat side facing upwards.
- When all the wire shelves (A) are in place, install the post caps (G) on the top of all four posts (E).



Safety Information



CAUTION: Wear suitable gloves when assembling.



IMPORTANT: Evenly distribute the weight on each level and always keep the heavier loads on the bottom.



WARNING: Do not stand on any part of the unit or use it as a ladder. Use care when working with metal parts.



IMPORTANT: These storage units should be placed on a level surface. Failure to do so can result in a possible safety hazard.



WARNING: Do not exceed the shelf load claim of 1,000 lbs of evenly distributed weight on any shelf.

Warranty

2 YEAR LIMITED WARRANTY

A two (2) year warranty is guaranteed when the storage unit is utilized for the intended use in non-aggressive, indoor environments and when it is assembled according to the instructions. If this product is defective, contact the Customer Service Team at 1-888-HD-HUSKY or visit www.HUSKYTOOLS.com.