





15 AMP SOLID-STATE SPEED CONTROL MODEL 22394

FOR USE WITH AS MANY AS SIX 52" or TEN 42" LISTED HUNTER SUSPENDED CEILING FANS.

CAUTION: ALL WIRING MUST BE PERFORMED IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES. WE RECOMMEND INSTALLATION BY A QUALIFIED ELECTRICIAN. DISCONNECT POWER TO CEILING FANS AT THE MAIN ELECTRIC PANEL PRIOR TO INSTALLATION.

READ AND SAVE THESE INSTRUCTIONS

CAUTION-RISK OF ELECTRICAL SHOCK

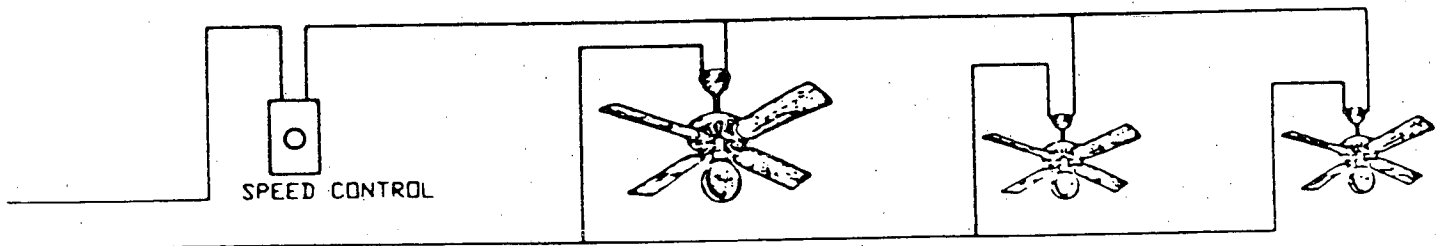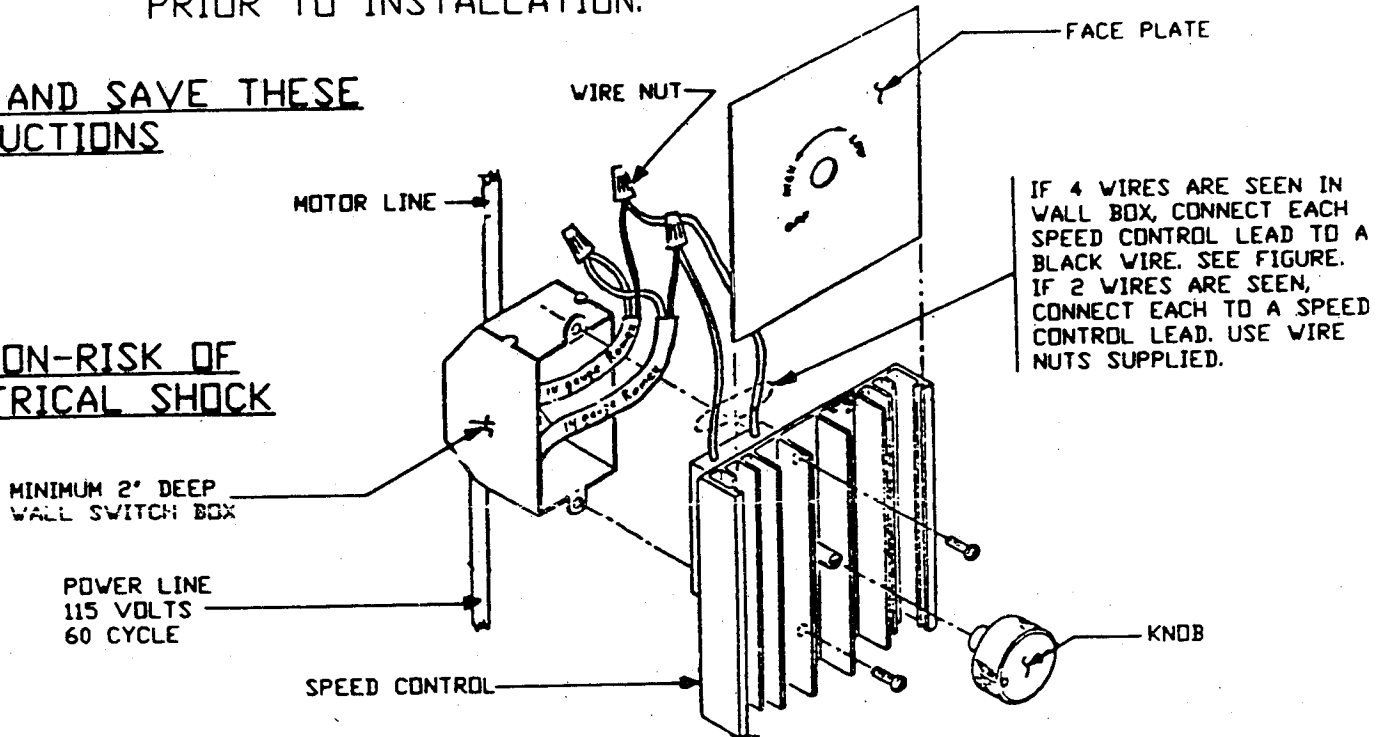

NOTE: USE OF A LIGHT KIT WITH ANY CEILING FAN DECREASES THE MAXIMUM NUMBER OF FANS THAT MAY BE SAFELY USED WITH THIS CONTROL. ADD UP THE TOTAL WATTAGE OF LIGHT BULBS BEING USED, DIVIDE BY 120, AND SUBTRACT THIS RESULTANT LINE CURRENT FROM 15 AMPS. WHATEVER IS LEFT IS THE MAXIMUM CURRENT THAT THE TOTAL NUMBER OF CEILING FANS CAN DRAW. FOR SAFETY, CONSIDER THAT EACH 52" FAN MOTOR DRAWS 1.0 AMPS AND EACH 42" FAN DRAWS 0.6 AMPS OF LINE CURRENT.