

HOW TO ASSEMBLE THE 42 IN./46 IN. DOUBLE BAGGER ON A TROY-BILT LAWN TRACTOR

1 TO BEGIN:

- Park on a flat surface, engage the parking brake and remove the key.



- Familiarize yourself with the specific owner's manual and instructions.



2 FOR SPECIFIC MODELS:


- You will need to bolt the mounting brackets to the rider.
- Use a 1/2" wrench or socket, secure 4 self-tapping bolts on both brackets.



- Add the hanger bolt to both brackets.
- Use a 15/16" and 9/16" wrench and socket to secure the bolt.

3 ASSEMBLE THE HITCH:

- Layout all of the parts and assemble the hitch bracket.

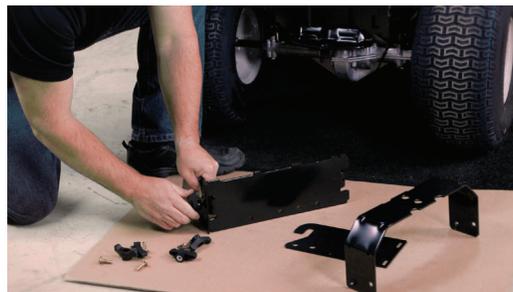

- Apply the hitch bracket and secure with bolt and cotter pin.



4 VERTICAL SUPPORT:

- Slide vertical support on the mounting bracket.
- Connect to the center hole using wing knob and bolt.



(Continued on next page)

HOW TO ASSEMBLE THE 42 IN./46 IN. DOUBLE BAGGER ON A TROY-BILT LAWN TRACTOR

5 ASSEMBLE HANGER ASSEMBLY:

- a. Secure with two carriage bolts, washers and lock nuts using a 1/2" wrench.



6 TOP BAGGER COMPONENTS:

- a. Snap plastic upper chute support in place.



- b. Snap plastic top cover support in place.
- c. Align the cover tabs and use the mounting pin to secure.



7 BAG INSTALLATION:

- a. Add both bags and secure the cover in place.



8 INSTALL THE BOOT:

- a. Secure the boot with a wing knob.



- b. Thread tube into bagger counterclockwise.

