Cub Cadet



CC-1000PS 15 cu ft POLY SWIVEL DUMP CART

U.S. Patent No. 8,496,298 & 9,242,588



READ AND FOLLOW ALL SAFETY RULES AND OPERATING INSTRUCTIONS BEFORE USING THIS EQUIPMENT

Safety Rules



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

Read and understand all safety rules and operating instructions before using this tractor attachment.

Follow all safety rules and operating instructions provided by your vehicle's manufacturer when using attachment.

Never allow children or untrained persons to operate vehicle or attachment.

Do not exceed the vehicle manufacturer's towed weight limit.

Reduce vehicle speed and allow extra stopping distance when towing heavy loads.

Reduce vehicle speed and towed weight when operating on slopes.

Operate up and down slopes, never across the face of slopes.

Do not carry passengers on vehicle or attachment.

Avoid sudden turns or maneuvers.

Do not tow attachment on public roadways.

Do not remove warning decals from product.


Check product for worn, loose, or damaged parts before each use. If any damage is present, repair the product before using.

Check product for loose or missing fasteners before each use. Tighten or replace fasteners as needed before using.

Do not exceed vehicle speed of 6 miles per hour when towing Dump Cart.

Do not exceed Dump Cart rated weight capacity of 1000 pounds.

Carton Contents

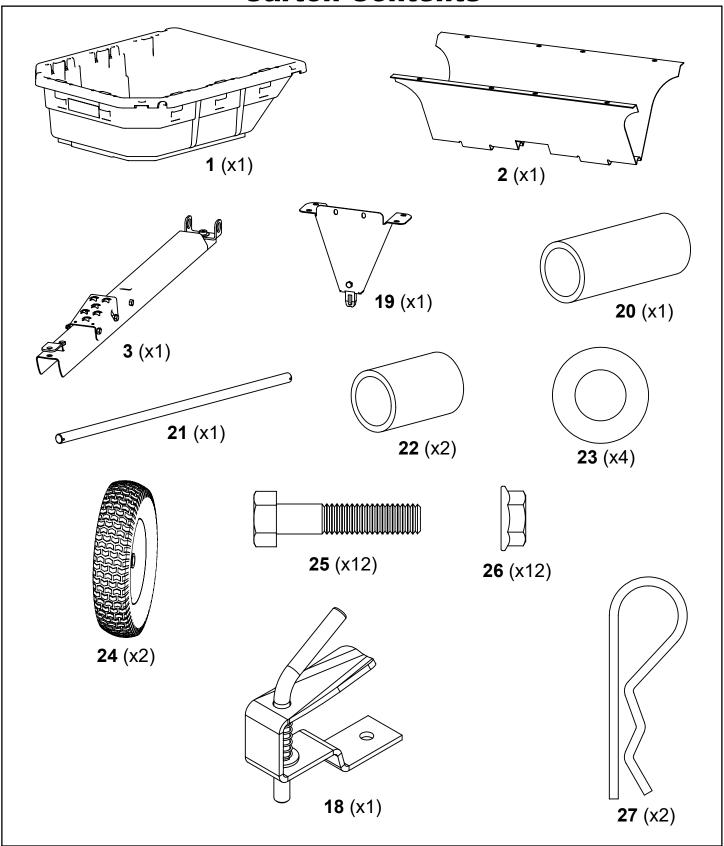


TOOLS REQUIRED FOR ASSEMBLY:

• 1/2" Wrench or Socket


Grease Gun

Assembly Instructions


1 Attach Undercarriage to Poly Body and tighten hardware.

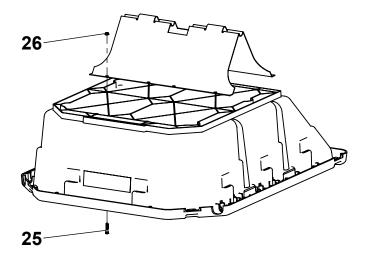

2 Attach Front Support to Poly Body and tighten hardware.

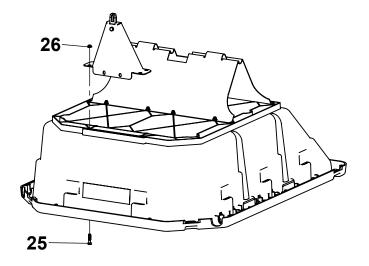


Insert Axle into Undercarriage halfway as shown. Center Spacer inside Swivel Clevis and align with Axle.

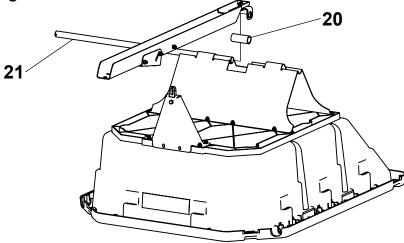



Assembly Instructions

Slide Axle completely through Undercarriage; Swivel Clevis and Spacer must be captured by Axle. Align Drawbar with Front Support and press down to latch.

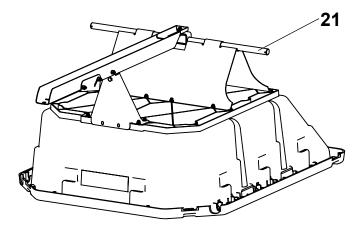

Slide in order: 1" Washers, 2" Spacers and then Wheels onto Axle and secure with Hairpins.

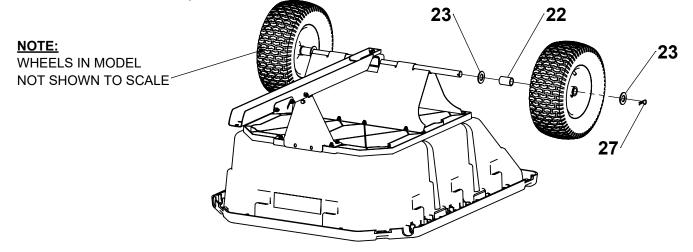

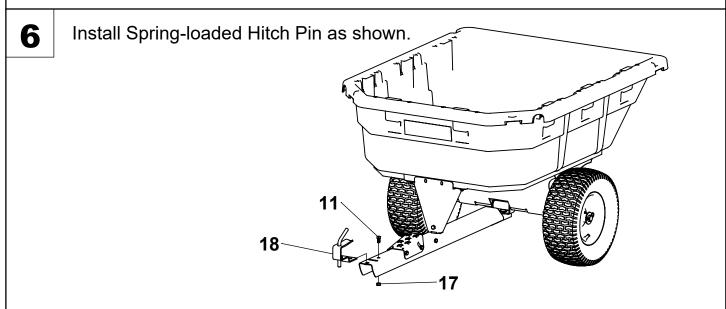

Operating Instructions

Before Using Dump Cart:

- 1. Apply grease to wheels using grease gun until grease can be seen squeezing out from both sides of the wheel.
- 2. Check tire pressure and inflate to 28 psi if needed.
- 3. Read all Safety Rules found on page 1.

How to Use Dump Cart:

- 1. Attach Dump Cart to your tractor using the supplied hitch pin.
- 2. Do not exceed 1000 pounds when loading material into the cart body.
- 3. Distribute the weight of the load as evenly as possible in the cart body for best handling.
- 4. When hauling heavy loads, verify that your vehicle has adequate towing and braking capacity.
- 5. Do not exceed 6 miles per hour when towing Dump Cart.


How to Empty Dump Cart:

- 1. Step down the foot pedal to release the latch mechanism.
- 2. Lift the body and swivel as desired to guide the material to preferred location.
- 3. Lift the body entirely and empty material.
- 4. Lower the body and guide the latch into the drawbar and relatch.

Periodic Maintenance:

- Tighten fasteners as needed before each use
- Check tire pressure before each use
- Grease wheels annually

Do-It-Yourself Accessories

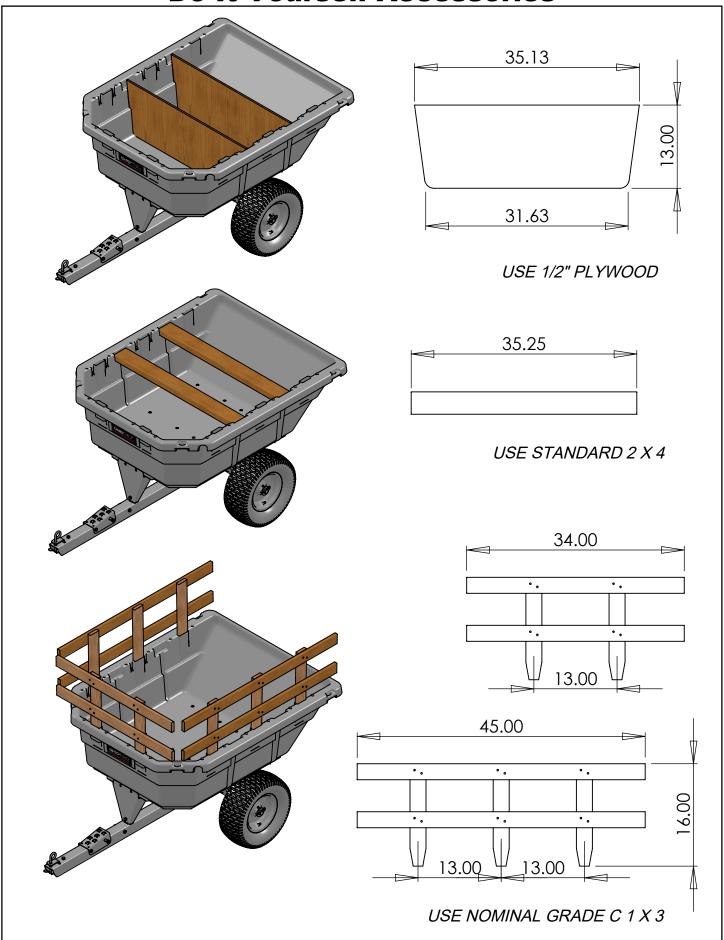

Warranty

If this product fails due to a defect in material or workmanship within THREE YEARS from the date of purchase, we will at our option repair or replace it free of charge. This warranty excludes tires and wheels which are expendable and become worn during normal use.

This warranty does not cover:

Purchase Price

- Repairs necessary because of operator abuse or negligence.
- Equipment used for commercial or rental purposes.
- Paint that is worn or faded due to normal use or exposure.

To arrange for product repair you can call 1-800-652-2321 to speak to our Customer Service Team, or return this product to place of purchase for replacement.

This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state. This warranty applies only while this product is in use in the United States.

In the space below record the purchase date of your Lawn Sweeper.


Model Number CC-1000PS

Purchase Date

Retailer/Dealer _______

Keep this Owner's Manual and your receipt in a safe place for future reference. Replacement parts may be ordered by calling <i>1-800-652-2321</i> .
When ordering replacement parts, always give the following information:
Product 15 cu ft POLY SWIVEL DUMP CART
Model Number <u>CC-1000PS</u>
Part Number
Part Description

EXPLODED VIEW

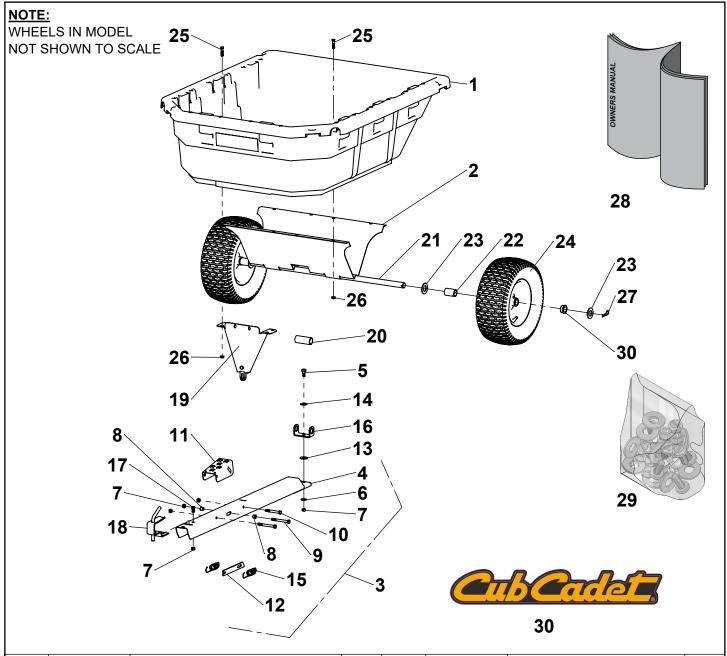

ITEM	PART NO	DESCRIPTION	QTY	ITEM	PART NO	DESCRIPTION	QTY
1	311161	Poly Body	1	17	300052	3/8-16 x 3/4" Hex Bolt	1
2	6000404	Undercarriage	1	18	6000612	Spring Loaded Hitch Pin	1
3	6001663	Drawbar Assembly (incl 4-16)	1	19	6000310	Front Support	1
4	6000383	Welded Drawbar	1	20	6000463	3-1/8" Spacer	1
5	6000369	Shoulder Bolt	1	21	300002	Axle	1
6	3000720	3/8" USS Flat Washer	1	22	6000382	2" Spacer	2
7	300061	3/8-16 C-Lock Nut	5	23	300076	1" SAE Flat Washer	4
8	6000324	Bushing	2	24	6002415-1	Wheel	2
9	6000370	3/8-16 x 3-1/2" Hex Bolt	2	25	3000528	5/16-18 x 1-1/2" Hex Bolt	12
10	300055	3/8-16 x 3" Hex Bolt	1	26	6000419	5/16-18 Flange Lock Nut	12
11	6000305-Y	Foot Pedal	1	27	300084	Hairpin Cotter, 2-5/16"	2
12	6000309	Latch	1	28	6004279	Owners Manual	1
13	300075	1/2" USS Washer	1	29	6001667	Hardware Bolt Bag	1
14	6000368	Spring Washer	1	30	777D21641	Decal, Cub Cadet	1
15	6000325	Latch Spring	2				
16	6000312	Swivel Clevis	1				

REPAIR KITS

KIT	KIT NUMBER	PART NUMBER	PART DESCRIPTION	QTY
	6001667	3000528	5/16-18 X1-1/2" HEX HEAD BOLT	12
		6000419	5/16-18 X1-1/2" SPINNER-GRIP NUT	12
		300076	1" SAE WASHER	4
HARDWARE			HAIRPIN COTTER, 0.093" X 2-5/16"	2
BOLT BAG		300052	3/8-16 X3/4" HEX BOLT	1
		300061	3/8-16 X3/4" C-LOCK NUT	1
		6000382	1" SPACER X 2"	2
		6000463	1" SPACER X 3-1/8"	1
1" WHEEL BUSHING KIT	6000810	6000808	1" WHEEL BUSHING	4
	6001663	300055	HEX BOLT, 3/8-16 X 3-1/2"	1
		300061	HEX NUT, 3/8-16 C-LOCK	4
		300075	WASHER, 1/2" USS	1
		3000720	WASHER, 3/8" USS	1
		6000305-Y	FOOT PEDAL	1
Drawbar		6000309	LATCH	1
Assembly		6000312	CLEVIS, SWIVEL	1
7 (33011101)		6000324	BEARING	2
		6000325	SPRING, LATCH	2
		6000368	WASHER, SPRING	1
		6000369	SHOULDER BOLT, 1/2" X 3/8"	1
		6000370	HEX BOLT, 3/8-16 X 3-1/2"	2
		6000383	WELDED DRAWBAR	1

Customer Service 1-800-652-2321

- 1. A description of the issue you are having
- 2. Photos of the issue that include an overall view and detailed view from multiple angles
- 3. If applicable, a short video showing the issue

If you believe this is a warranty related issue please see the warranty page in this manual **Replacement Parts:**

If you are ordering replacement part(s) for your product, please note that some parts are only available as a repair kit. You can reach our Customer Service Department at 1-800-652-2321

- 1. First locate the part on the Exploded View page (page8)
- 2. Take note of the part number
- 3. If the part number is on the Repair Kits page, use the kit number to order your replacement parts
- 4. If the part number is not on the Repair Kits page, use the part number to order your replacement part

Designed And Tested In Columbus, Ohio Manufactured In The U.S.A. From Domestic And Imported Components



MODEL # CC-1000PS

(800) 652-2321

(800) 652-2321