

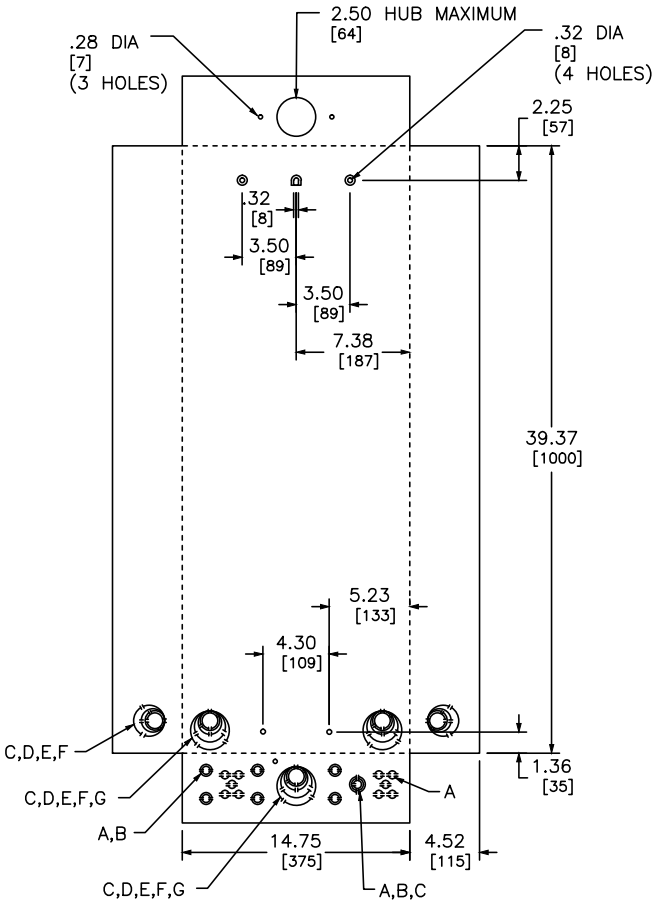



KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

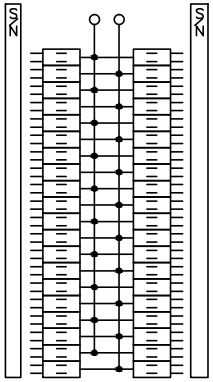

HOM4080L225PRB

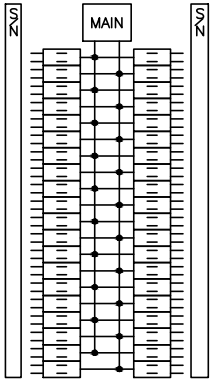

HOM4080M200PRB

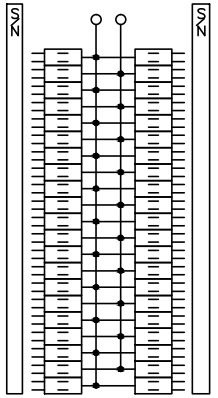

HOM4284L225PRB

DUAL DIMENSIONS: INCHES / MILLIMETERS

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM CIRCUITS	MAIN WIRE SIZE AWG AL	MAIN WIRE SIZE AWG CU
HOM408L225PRB	120/240VAC 1PH 3W	225	40	80	#4–300	#4–250
HOM40080M200PRB		200	40	80	#4–250	#4–250
HOM4284L225PRB		225	42	84	#4–300	#4–250

NOTES:
FINISH – GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPATIZED STEEL.
UL LISTED – FILE E–6294
NEUTRALS – INSULATED GROUNDABLE.
WHEN MOUNTING THESE LOAD CENTERS, ALLOW 1.25/[32] INCHES OF CLEARANCE ON HINGED SIDE FOR THE DOOR TO OPEN.

HOMELINE LOAD CENTERS
RAINPROOF NEMA TYPE 3R ENCLOSURE
SIDE HINGED
OUTDOOR

SQUARE D
by Schneider Electric

DWG# NO. PWFDS–SYRS–0079