


# SPEC VANITY I Bath Vanity

## 52000 / 52002 / 52004 / 52006


- ETL, cETL IP65
- Suitable for wet locations
- CRI 90+
- Dimmable with Triac Dimmer
- Energy Star
- Title 24

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_

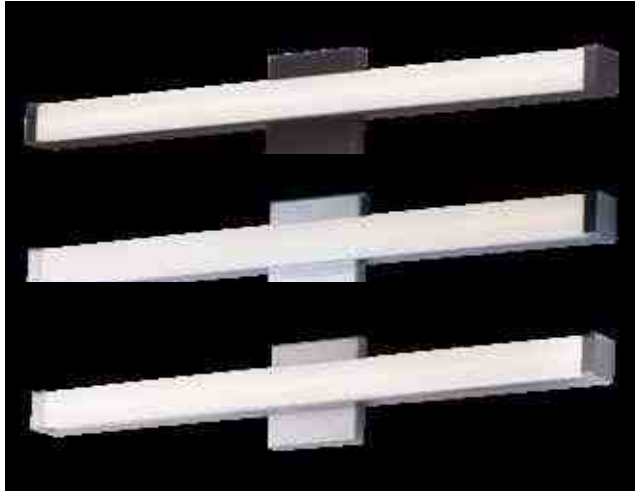

### PRODUCT DESCRIPTION

This minimalistic contemporary approach to LED vanity lighting will be the standard for both residential and commercial applications. The light engine features a high quality dimmable driver with multi volt input and high color rendering LEDs for the ultimate vanity lighting.



### MEASUREMENTS

MODEL	DIMENSION	HANGING WEIGHT
52000	18"L x 1.75"H x 2.25"EXT	0.60 LB
52002	24"L x 1.75"H x 2.25"EXT	0.90 LB
52004	30"L x 1.75"H x 2.25"EXT	1.45 LB
52006	36"L x 1.75"H x 2.25"EXT	1.70 LB

### LAMPING

MODEL	BULB TYPE	CRI	LUMENS	COL TEMP.	DIMMABLE	INPUT
52000	(1) 12W PCB LED (Integrated)	90+	840	3000K	Triac Dimmer	120-277V
52002	(1) 16W PCB LED (Integrated)	90+	1120	3000K	Triac Dimmer	120-277V
52004	(1) 20W PCB LED (Integrated)	90+	1400	3000K	Triac Dimmer	120-277V
52006	(1) 24W PCB LED (Integrated)	90+	1680	3000K	Triac Dimmer	120-277V

### FINISHES OPTIONS:

- Bronze (BZ)
- Polished Chrome (PC)
- Satin Nickel (SN)




### MATERIAL:

- Aluminum
- PMMA White Acrylic

### RATINGS:

- ETL cETL IP65
- Wet Location
- Energy Star
- CA Title 24
- ADA
- Dimmable



### ADDITIONAL:

PHOTOMETRIC: Report Found Online  
 OPERATING TEMPERATURE:  
 -20°C (-4°F), 40°C (104°F)

*Always consult a qualified electrician before installing any lighting product*



**WESTERN DISTRIBUTION CENTER (HEADQUARTER)**  
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

**EASTERN DISTRIBUTION CENTER**  
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com