


Bypass Barn Door Hardware Instruction Manual





(2-DOOR J-Shape 10ft)

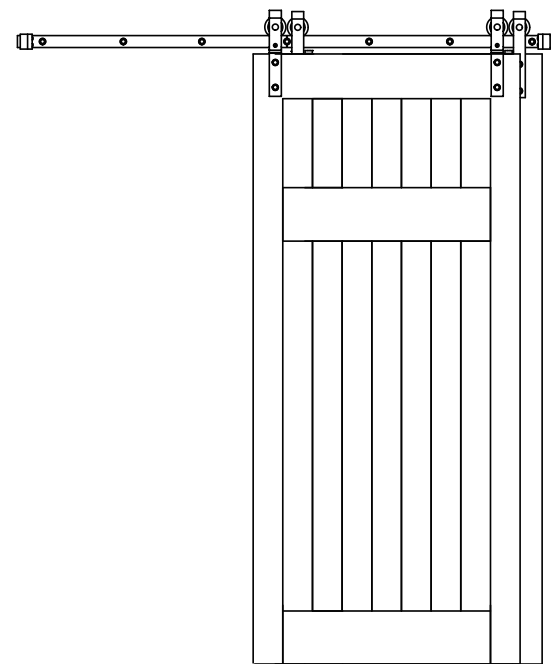


Note: If you encounter any problems with the installation, missing or replacement parts, please Contact **ROOMTEC**
Please also tell us your **“ORDER ID,”** we will solve the issue for you as soon as possible.

TEL: (800)209-3199 (MON -FRI 9:00am-5:00pm Eastern Time)
Email: hello@room-tec.com

Product Content

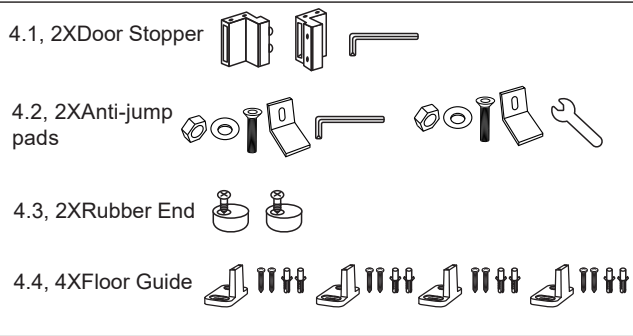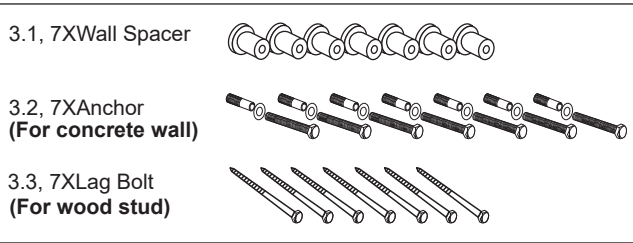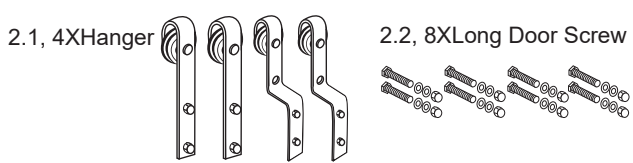

Tools Needed


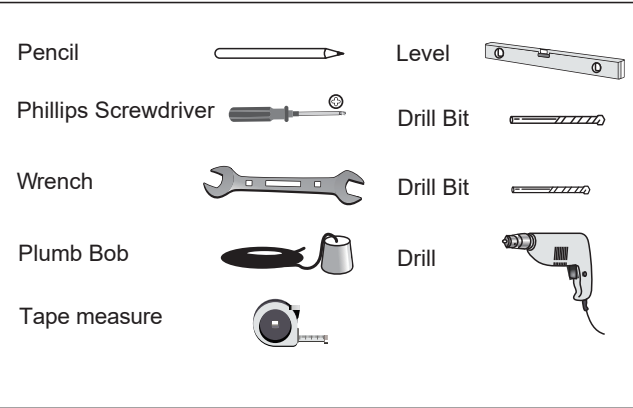


Prepare and Install the Tracks

01 Draw Line for the Track, Drill Track Holes

a. Place the rail against the wall, Using a level, draw a line for the Track, and use a pencil to mark where the holes should be. Make sure the height of holes on the wall is $H + 1-11/16"$.

Note: Concrete wall: Drill holes by using a 3/8" concrete drill bit. Wood framed wall: Drill out the holes by using a drill with 1/4" drill bit.

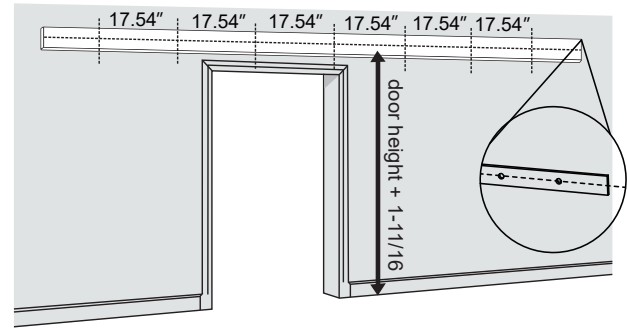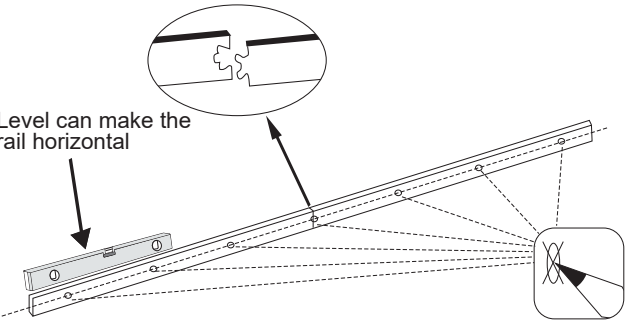


02 Install The Track

We provide 2 kinds of screws for you to install rail onto concrete wall or drywall

A Concrete wall installation.

Install the anchor to holes on the concrete wall first, then install lag bolt to anchor.

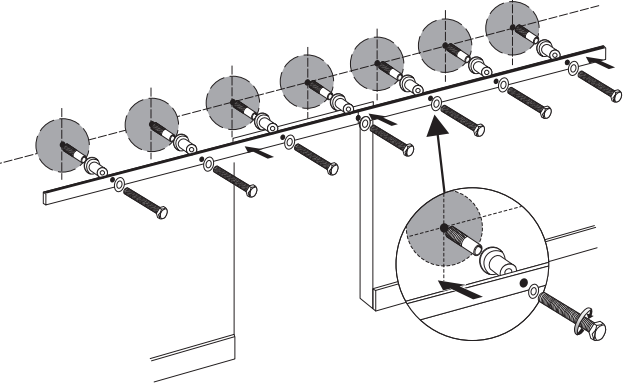


B Drywall installation.

Install the lag bolt to wood stud or head board directly.

Please install a 1"x 4" or 1"x 6" Header Board above the door opening directly into studs. Header Board must be solid wood and measure at least the full length of the track or longer.

★ Header Board and lag Bolts for installing Header Board are not included in kit.

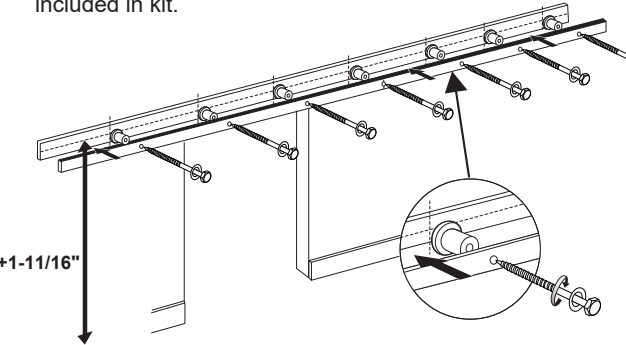


Prepare Your Doors


03 Attach Steel Hangers to Your Doors

a. Install the hangers onto the door according to the measurement in the pictures below. Maximum door thickness is 1-3/4", please add some bolt washers or cut the long door bolts to a suitable length to fit the door.

Inside Door

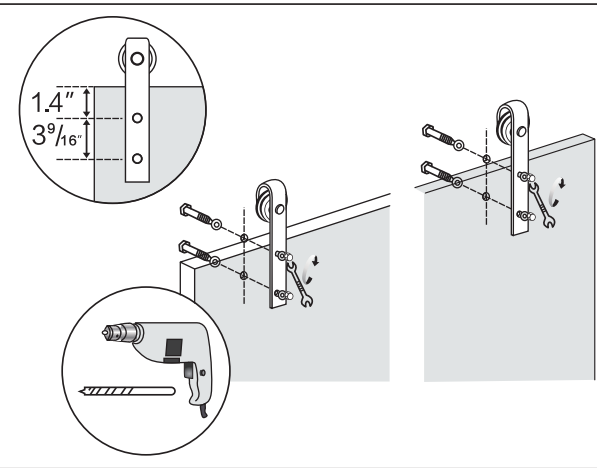


Outside Door

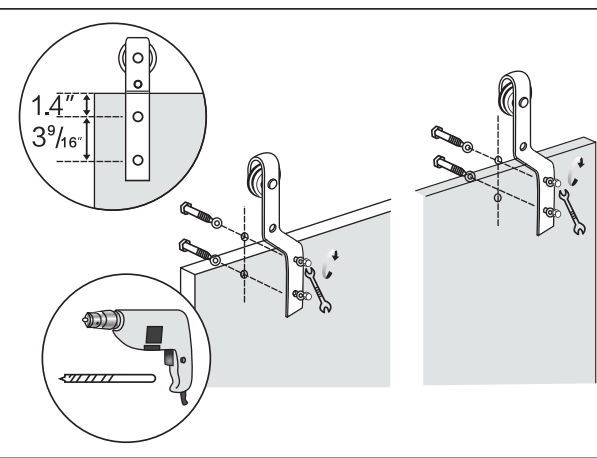

04 Install anti-jump pad


- a. The inside door should install the round anti-jump pads very close to the hanger as shown in the picture. The screw is near the front edge of your door (recommended: drill pilot hole to avoid splitting).

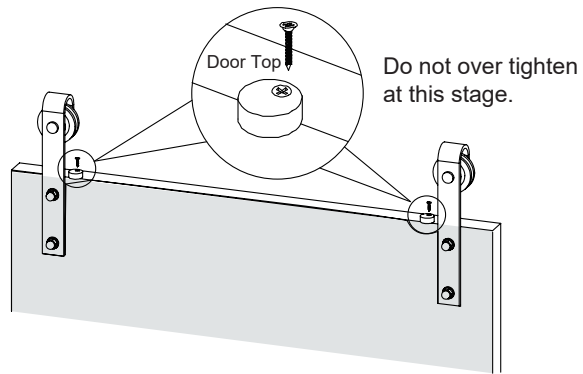


Hanging and Positioning Doors

05 Install Your Doors

- a. Hang your Steel Hangers on the Track, and then twist the Anti-Jump Pad toward the wall so that it is under the Track.

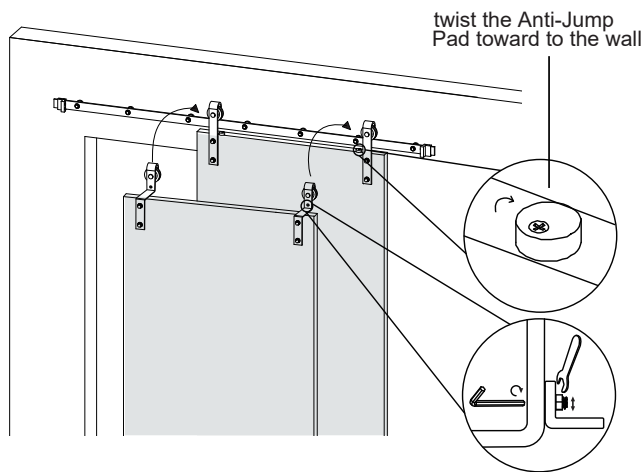


- b. The outside door has the special anti-jump pads. you could adjust it with the tools.

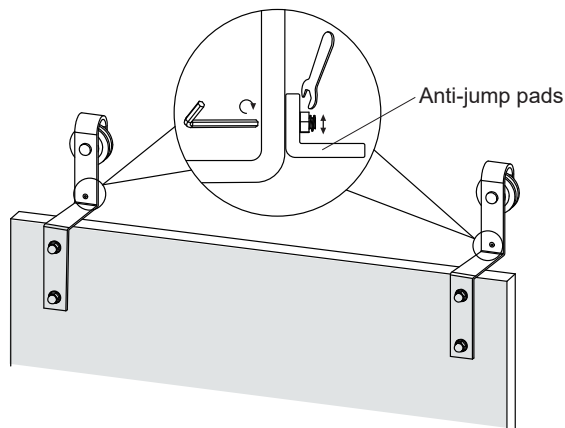

06 Install the Stopper


Insert door stoppers into rail ,install door stoppers between A-B and C-D.Door stopper is used to prevent the hangers coming out of the rail.

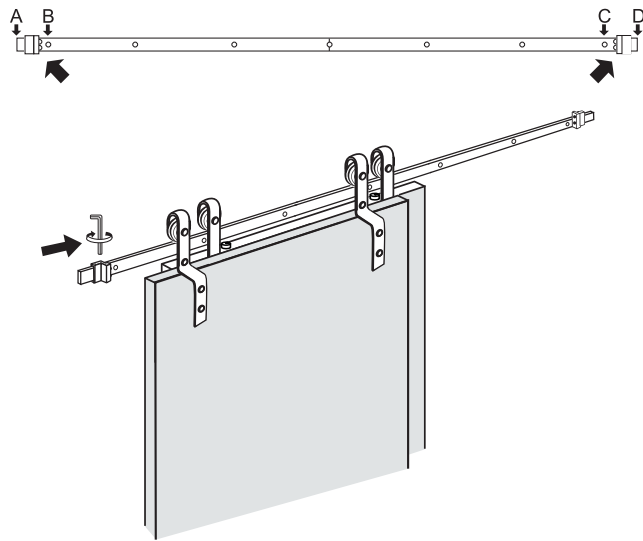


07 Install the Floor Guide

First, position the door at your desired close position.

Outside Door: Slide all the doors to the far right, mark the location in the lower left corner of the outside door, and then fix the guide to the floor .(make sure the doors do not come off the floor guides when sliding left or right).

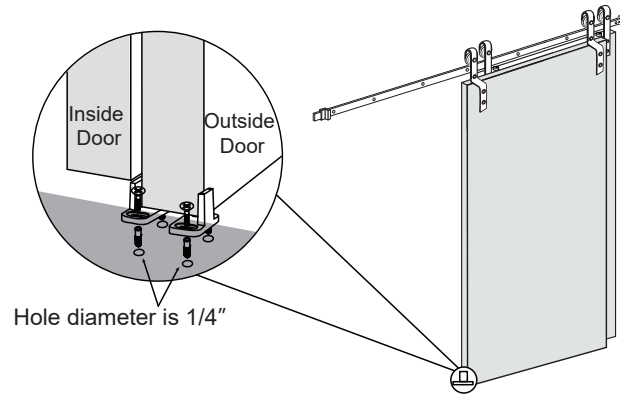

Inside Door: Slide all the doors to the far left , mark the location in the lower right corner of the Inside Door, and then fix the guide to the floor .(make sure the doors do not come off the floor guides when sliding left or right)

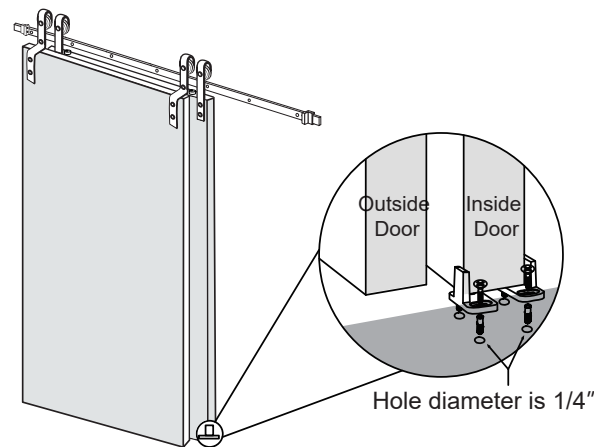

WARNING

- Failure to wear proper safety gear (i.e.,eye protection) may result in serious injury or death. Always wear proper safety gear before using power tools.
- Improper operation of power tools may result in loss of control, serious injury or death. Always ensure you have complete control of the power tool and the work area is free of hazards before operating a power tool.
- Lack of secure clamping of the door may result in unexpected movement of the door,loss of power tool control and serious injury or death. Always securely clamp the door in place before cutting,or drilling, the door.
- Lack of ,or improperly installed Anti-jump Disc may result in the door coming off the track and cause serious injury or death. installation of Anti-jump Disks are required for safe operation of this hardware. installed properly, these discs will keep the door securely attached to the teack.

CAUTION

- Mishandling of heavy objects (i.e.,doors) may cause a loss of balance and serious injury.Always be sure you have a secure hold on the object and are balanced before moving the object. Always wear safety shoes when lifting heavy objects.
- Getting body parts (i.e., hair,fingers) caught in moving parts may cause pinching and serious injury.Do not put fingers in parts that may move and always remove or contain anything on your body that may become entangled with a moving part.
- Closing sliding doors with your hand on the end of the door may result in your hand,or fingers, getting caught between the door and other solid objects (i.e., anothe door,molding) causing serious injury.Always use the door handle to close doors.

Usage Statement:

Use of excessive force when opening, and closing,the door(s) may result in damage to the hardware.
Always hold the handle and gently open and close the door(s).