


Product Name: LED Down Light

Item Number: JH-DL13W-16S



CAUTION: Turn off the main power at the circuit breaker while installing and servicing the fixture to prevent possible injury from electric shock. All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with pro electrical wiring connections, obtain the services of a qualified electrician.

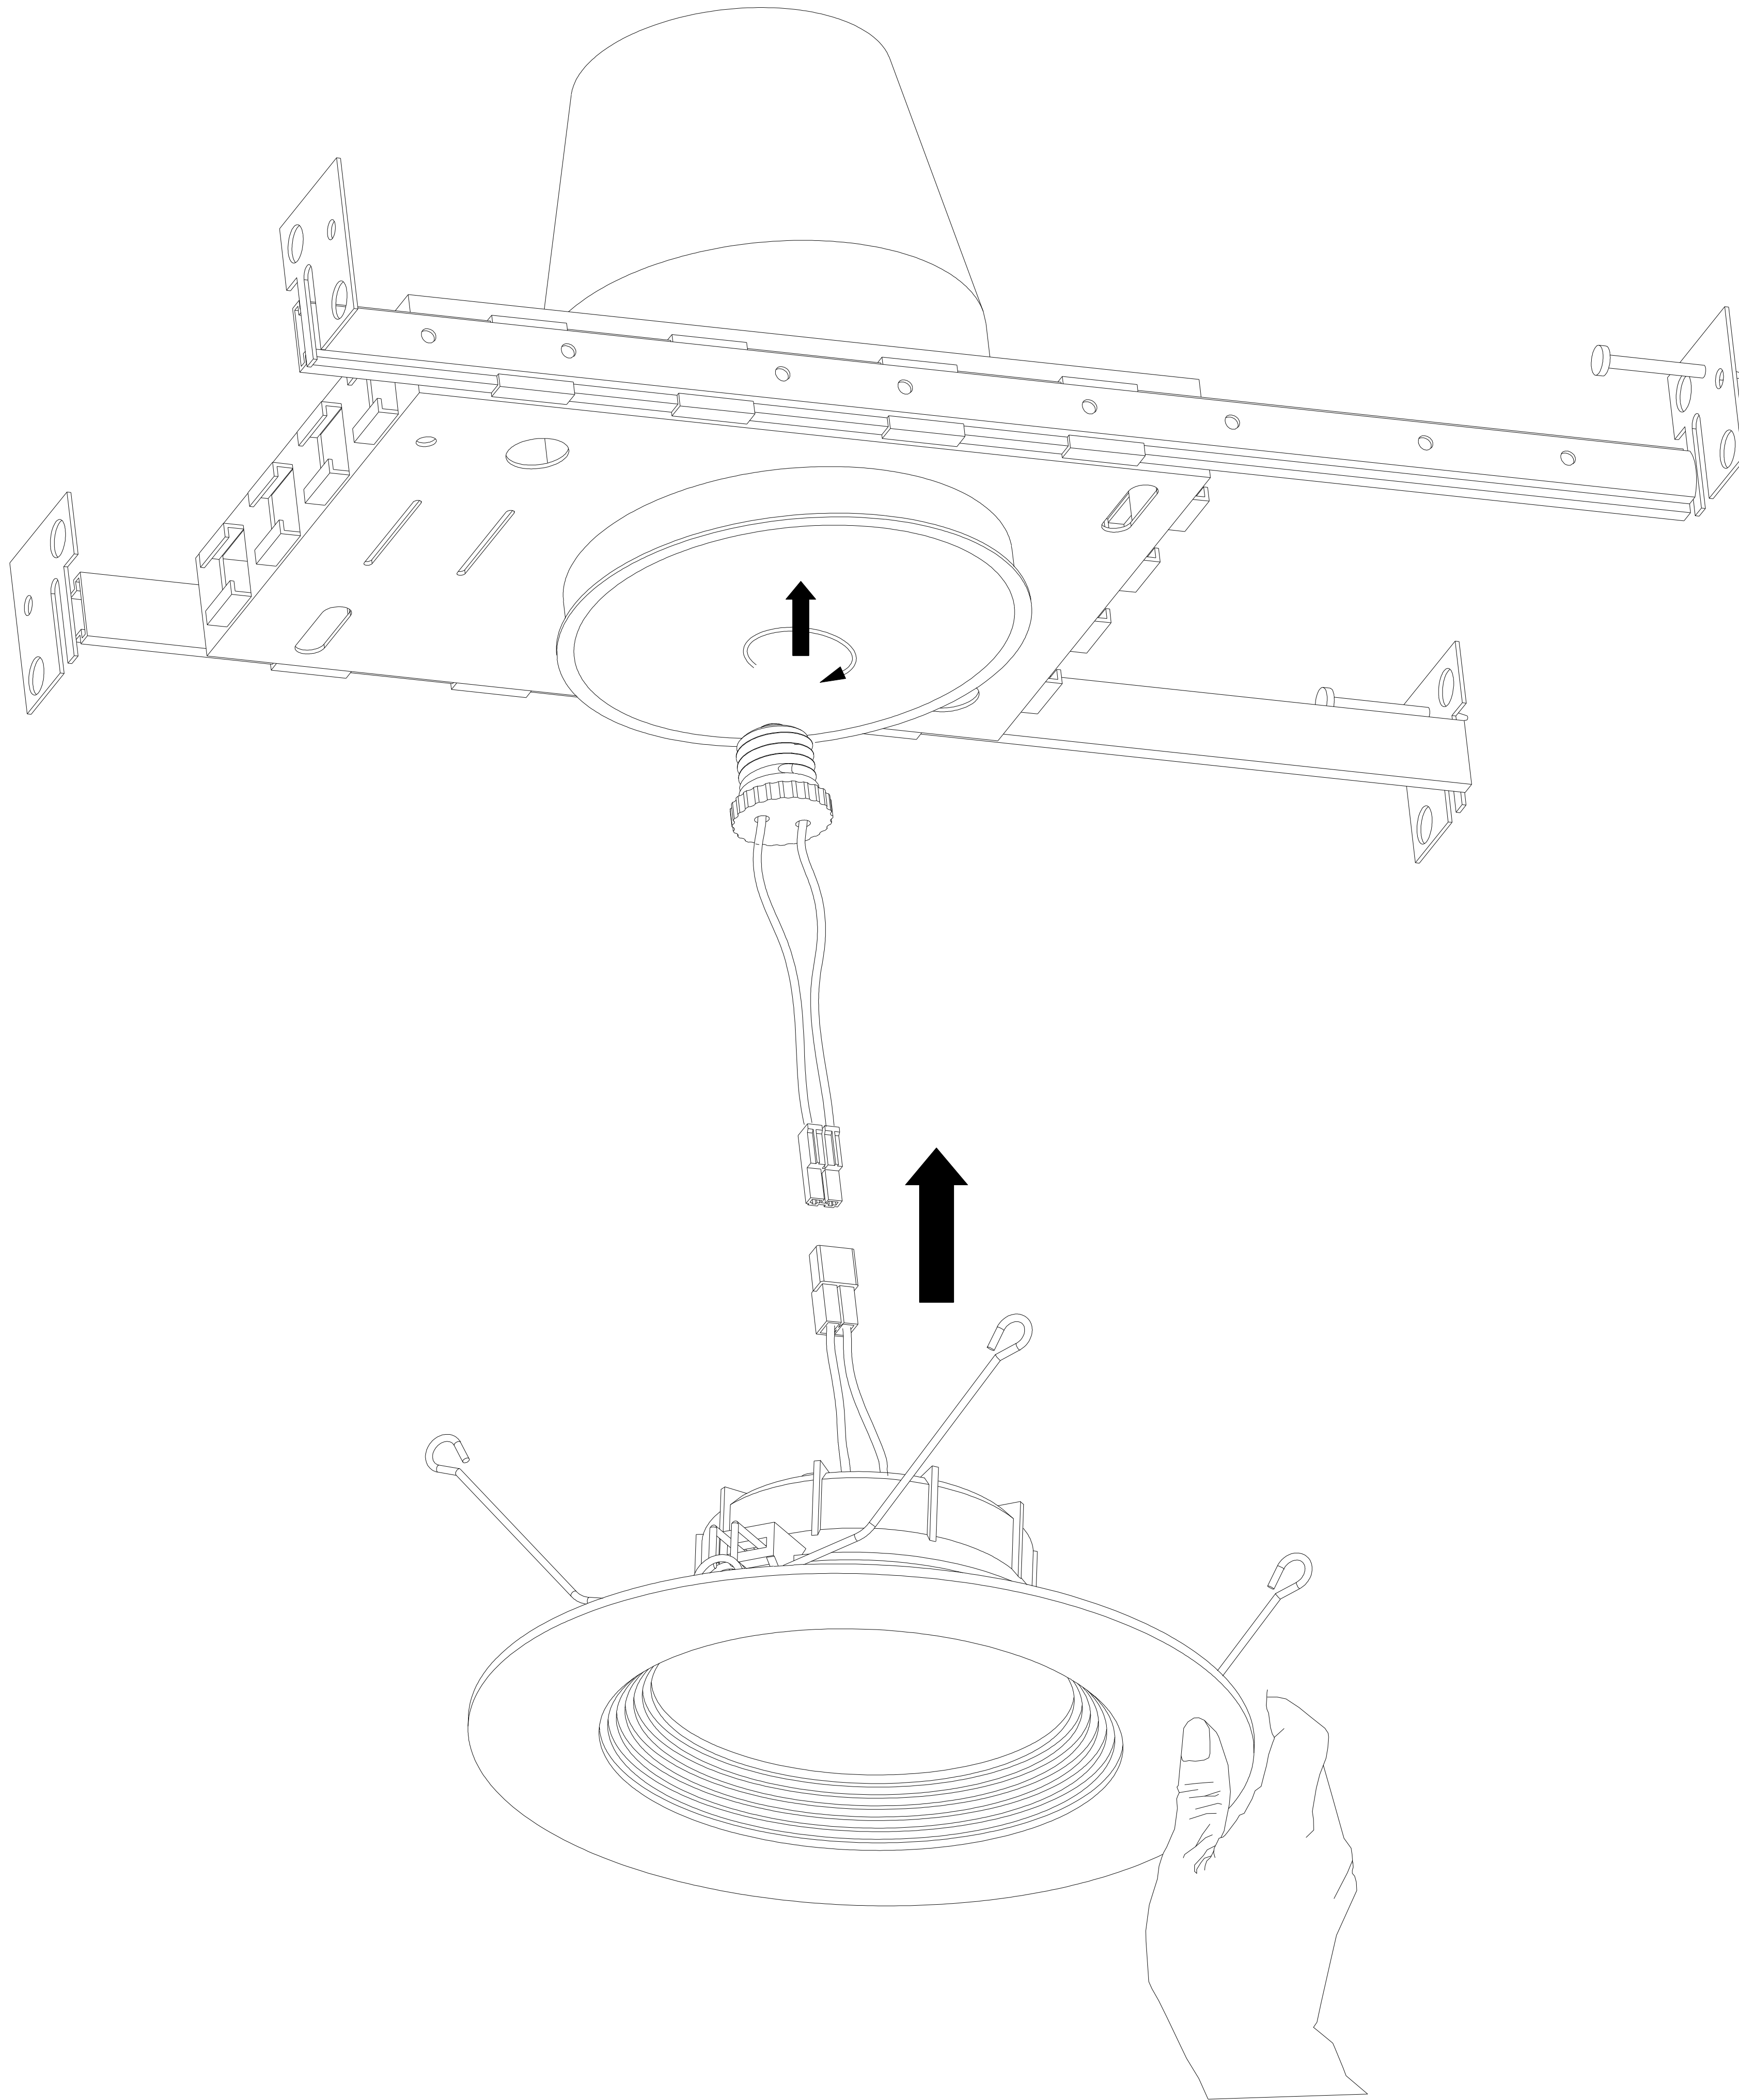

1. Place the mounting wall plate over the outlet box and align it with the mounting slots of the wall plate.
2. Pull the supply wires and house ground wire out from the gang box before attaching the wall plate. Push the 8/32-32t screw through the slot in the crossbar, secure it to the junction box, adjust the clamp to the vertical position, and then tighten it.
3. Make the electrical connections (black fixture wire to black supply wire, white fixture wire to white supply wire, and fixture ground wire to supply ground wire).
4. Attach the fixture base to the crossbar using the two clamp screws.