


# How to make a ProLock Connection




## To Connect

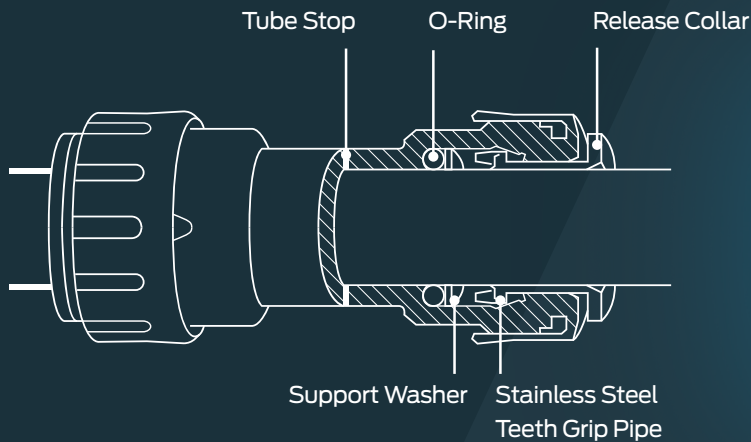

### Step 1: Push

When cutting SharkBite PE-RT Pipe, ensure that the ends are cut square and the surface is smooth. Ensure that both the ProLock fittings and pipe are clean and free of debris. Push pipe onto fitting.

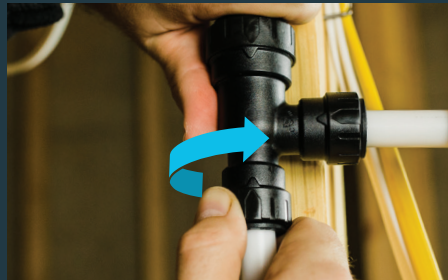

### Step 2: Twist

Turn the locking cap quarter turn clockwise to the locked position, an audible click will be heard.



### Step 3: Lock

To ensure that the fitting has been locked, check to make sure the indicator marks are aligned.

Keep product clean in a bag until ready to use.

## To Disconnect

1. Depressurize the system.
2. Turn locking cap quarter turn counter clockwise.
3. Push against release collar and pull pipe to release.

