


Meter / Load Center Combination


JA1020B1100S, JA1020B1100F

Features

- UL Listed only for use as service entrance
- NEMA type 3R enclosure
- Overhead feed
- RX hub provisions on top endwall
- 10 KAIC rated
- 100A factory installed main breaker
- Pad locking provisions on all devices
- Ring style meter cover
- INSTA-WIRE™ neutrals
- 4.3" deep enclosure

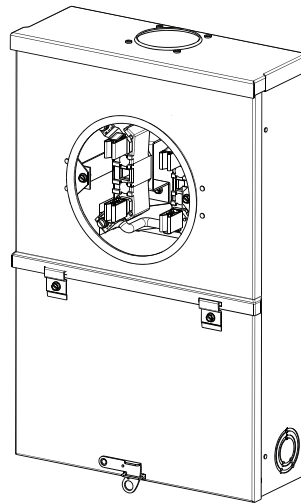

Surface Mount
(JA1020B1100S)

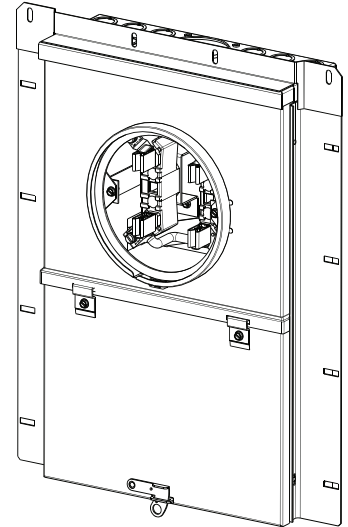

Flush Mount
(JA1020B1100F)

Catalog Number	Replaces	Main Breaker	Spaces	Circuits	Mounting
JA1020B1100S	JA110AS	MP2100	10	20	Surface
JA1020B1100F	JA110AF	MP2100	10	20	Flush*





* Semi-Flush Mounting

Data Sheet

www.murrayconnect.com







MURRAY

Meter / Load Center Combination
Knockout Diagram
Surface Mount (JA1020B1100S)

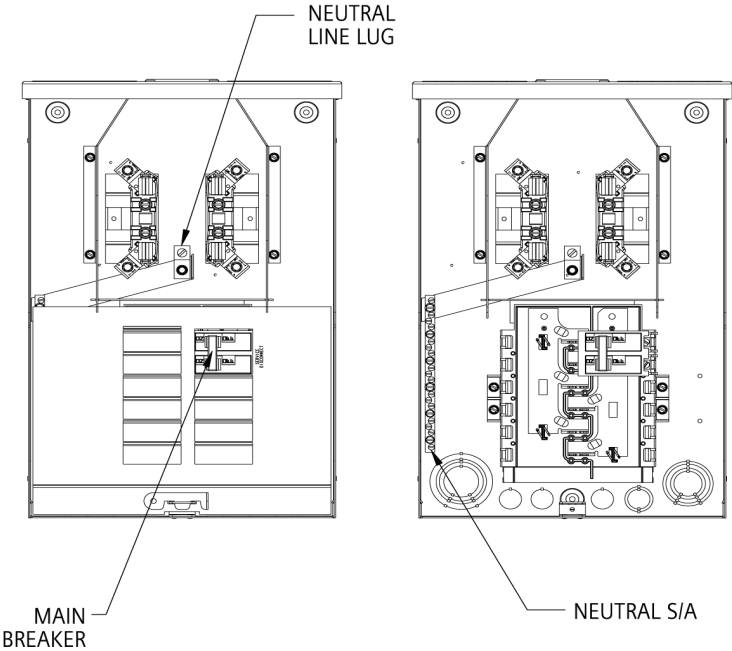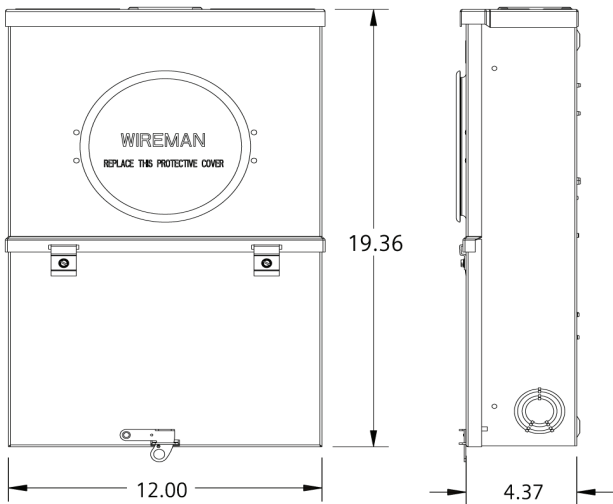

Knockout Schedule (inches)	
A	1/2, 3/4
B	.281 dia. or .312 dia.
C	1/2, 3/4, 1
D	1/2
E	3/4, 1, 1-1/4, 1-1/2

Meter / Load Center Combination Knockout Diagram Flush Mount (JA1020B1100F)

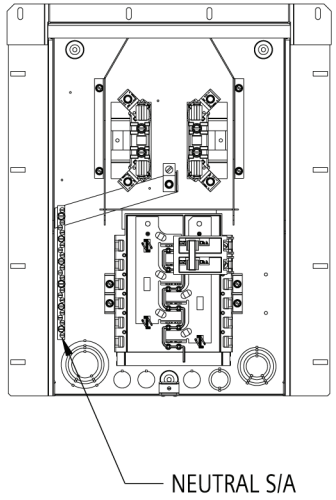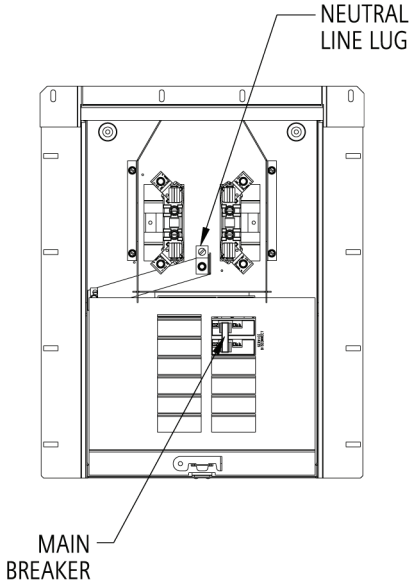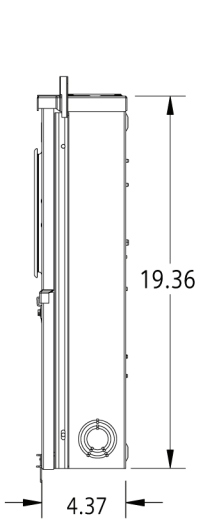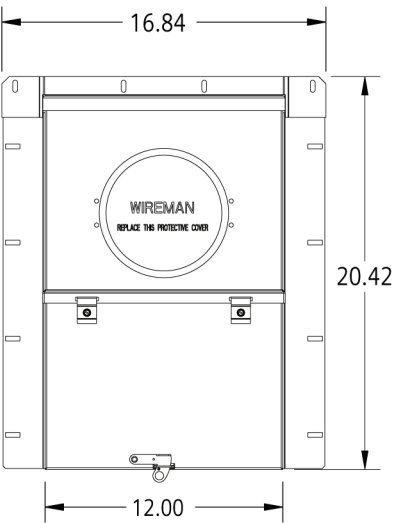

Knockout Schedule (inches)
A = 1/2, 3/4
B = 1/2, 3/4
C = .281 dia or .312 dia.
D = 1/2, 3/4, 1
E = 3/4, 1, 1-1/4, 1-1/2

Siemens Energy & Automation, Inc.
 3333 Old Milton Parkway
 Alpharetta, GA 30005

1-800-964-4114
 info.sea@siemens.com

©2008 Siemens Energy & Automation, Inc.
 All Rights Reserved. Siemens is a registered trademark of Siemens AG. Product names mentioned may be trademarks or registered trademarks of their respective companies. Specifications are subject to change without notice.

MYFL-1020B-0708 (New) 0708POD

www.murrayconnect.com