For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

Product Submittal Form

O3301/S3301 Multi-Turn Angle Stop - Female Iron Pipe x Slip-Joint

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use of temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:


- **Machined one-piece brass body** provides strength, durability and long-lasting performance
- **Oval knurled handle** provides a secure grip and smooth on/off operation
- ☑

Operating Specifications:


Temperature: 40°- 160° F

Pressure: 125 PSI maximum

Excludes loose key handle

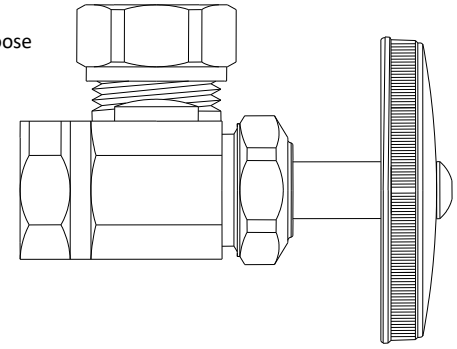

STOP MATERIAL SPECIFICATIONS	
Body	*Brass, plated*
Stem	*POM or brass*
Bib & Packing Washers	*Nitrile or EPDM rubber*
Packing Nut	*Brass*
Handle	*ABS, plated*
Handle Screw	*Steel, zinc plated*
Slip-Joint Washer	*NBR rubber*
Slip-Joint Nut	*Brass*
Friction Rings	*Brass*

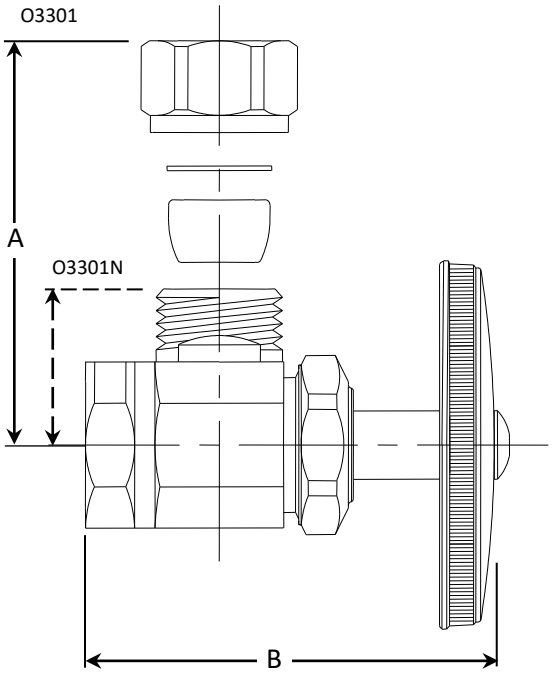

Part Listing:

☐	O3301X C	1/2" FIP x 7/16" & 1/2" slip-joint, chrome plated
☐	O3301X C1	1/2" FIP x 7/16" & 1/2" slip-joint, chrome plated, window tray
☐	O3301NX C	1/2" FIP x 7/16" & 1/2" slip-joint, less outlet nut, chrome plated

PART DIMENSIONS *(Inches)*		
Model	***DIM. A***	***DIM. B***
O3301X	1.19	2.62
O3301NX	.85	2.62

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)

Excludes loose key handle

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

©2021 BrassCraft Manufacturing Company